# SCW-EMEM060-F1-PM

## 1.35 mm (M) to 1.35 mm (M) Coaxial Cable, Flexible, 60", Phase Matched

### **Description:**

**Model SCW-EMEM060-F1-PM** is a 60" long, flexible, phase matched coaxial cable with 1.35 mm (E) male connectors that cover the frequency range of DC to 90 GHz. The coaxial cable utilizes the highest quality test instrumentation grade cable and a precision manufacturing process to guarantee



**Applications:** 

Test Lab

Sub-assemblies

superior microwave performance and mechanical durability. The impedance of the cable is 50 ohms. Other lengths are offered under different models.

#### Features:

- High Return Loss
- Low Insertion Loss
- Flexible and Durable

#### **Electrical Specifications:**

#### Parameter Minimum Typical Maximum DC 90 GHz Frequency Insertion Loss 23.9 dB **Return Loss** 14 dB Impedance 50 Ω Phase Match (Unit to Unit) ±45° **Power Handling** 2 W (CW) +25 °C **Specification Temperature** -40 °C +85 °C **Operating Temperature**

#### **Mechanical Specifications:**

Item	Specification
Connectors	1.35 mm Male
Connector Contact Material/Plating	Beryllium Copper (BeCu)/Gold Plating Per MIL-G-45204
Connector / Cable Insulation Layer Material	Passivated Stainless Steel / PEI
Cable Jacket Material	Fluorinated Ethylene Propylene (FEP)
Cable Outer Diameter	0.057"
Length	60"
Minimum Bending Radius	0.25″
Weight	1.0 Oz
Outline	CW-EE-F10




www.sagemillimeter.com | 3043 Kashiwa Street, Torrance, CA 90505 Phone: 424-757-0168 | Fax: 424-757-0188 | Email: sales@sagemillimeter.com

# SCW-EMEM060-F1-PM

### 1.35 mm (M) to 1.35 mm (M) Coaxial Cable, Flexible, 60", Phase Matched

#### Mechanical Outline: (Unless otherwise specified, all dimensions are in inches)

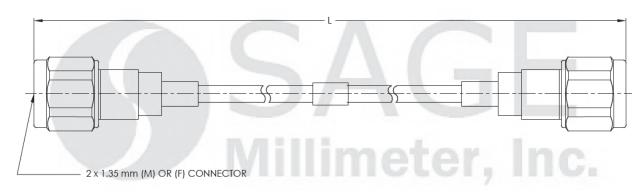

#### Note:

- Length "L" can be customizable.
- All data presented is collected from a sample lot. Actual data may vary unit to unit, slightly.
- All testing was performed under +25 °C case temperature.
- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.

#### **Caution:**

- Bending the cable sharply will either cause damage or degrade the performance of the cable.
- Proper torque, 8.0 ± 0.15 inch-pounds (0.90 ± 0.02 Nm), should be applied. SAGE Millimeter torque wrench, model SCH-08008-U3, is highly recommended.





www.sagemillimeter.com | 3043 Kashiwa Street, Torrance, CA 90505 Phone: 424-757-0168 | Fax: 424-757-0188 | Email: sales@sagemillimeter.com