STA-03-10-F1-C-1.2

Rev 1.0

W-Band Fixed Attenuator, 3 dB, Insertion Length 1.2”

Description:

Model STA-03-10-F1-C-1.2 is a compact fixed attenuator with insertion length of 1.2”. The attenuator is used in millimeterwave systems and operates from 75 to 110 GHz. The attenuator has a fixed attenuation value of 3 dB at the center frequency, 92.5 GHz. While the attenuator is designed and fabricated for full waveguide band applications, the attenuation value of this model does show a minor slope within the band due to its distinct mechanical configuration. Various attenuation values are available under different model numbers.



Features:

- Full Band Coverage
- Low Cost
- Accurate Attenuation Value at Center Frequency
- Compact Design

Applications:

- Test Lab
- Instrumentations
- System Integration

Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency	75 GHz		110 GHz
Attenuation @ 92.5 GHz		3 dB	
Return Loss		20 dB	
Power Handling			0.5 W (CW)
Specification Temperature		+25 ˚C	
Operating Temperature	-40 ˚C		+85 ˚C

Mechanical Specifications:

Item	Specification
RF Ports	WR-10 Waveguide with UG-387/U-M Flange
Setting	Fixed
Material	Aluminum
Finish	Gold Plated
Weight	0.4 Oz
Insertion Length	1.2”
Outline	WF-BW


www.sagemillimeter.com | 3043 Kashiwa Street, Torrance, CA 90505
Phone: 424-757-0168 | Fax: 424-757-0188 | Email: sales@sagemillimeter.com

Copyright © 2019 by SAGE Millimeter, Inc.


SAGE Millimeter, Inc.

W-Band Fixed Attenuator, 3 dB, Insertion Length 1.2”

Typical Attenuation vs Frequency

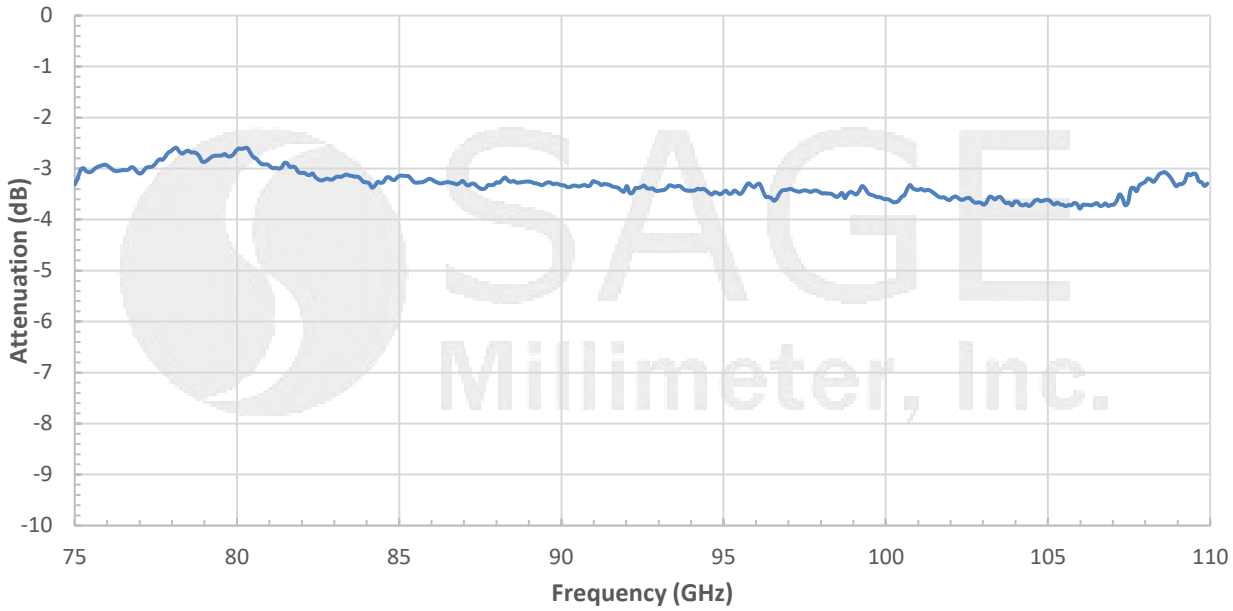

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

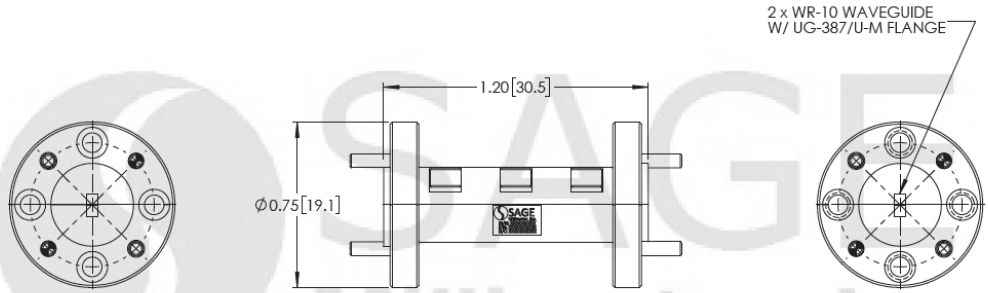

Note:

- All data presented is collected from a sample lot. Actual data may vary unit to unit.
- All testing was performed under +25 ˚C case temperature.
- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.
- Other mechanical configurations are available under different model numbers.

Caution:

- Exceeding absolute maximum ratings will damage the device.
- Any foreign objects in the waveguide will cause performance degradation and may damage the device.

www.sagemillimeter.com | 3043 Kashiwa Street, Torrance, CA 90505
Phone: 424-757-0168 | Fax: 424-757-0188 | Email: sales@sagemillimeter.com

Copyright © 2019 by SAGE Millimeter, Inc.