

Q-Band Waveguide Directional Coupler, 40 dB

Description:

Model SWD-4040H-22-SB is a Q band, three-port waveguide directional coupler that delivers a 40 dB nominal coupling level and 35 dB minimum directivity across the full waveguide band from 33 to 50 GHz. The three-port coupler uses a traditional multi-hole and split block design to achieve flat coupling level, high directivity, and low insertion loss. The interfaces of the coupler are WR-22 waveguides with UG-383/U anti-cocking flanges. Custom coupling levels are available under different model numbers.



Features:

- Full Band Operation
- Low Insertion Loss
- High Directivity



Applications:

- Test Labs
- Instrumentation
- Sub-assemblies

Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency	33 GHz		50 GHz
Insertion Loss*		0.6 dB	
Coupling*		40 dB	
Directivity*	35 dB		
VSWR			1.10:1
Specification Temperature		+25°C	
Operating Temperature	-40°C		+85°C

* The definition of the insertion loss, coupling and directivity is show as following.

<p>Insertion Loss = $-10 \log_{10} [(P2+P3)/P1]$</p> <p>Coupling Value = $-10 \log_{10} [P3/P1]$</p>	
<p>Directivity = $-10 \log_{10} [P3/P2]$</p>	

Mechanical Specifications:

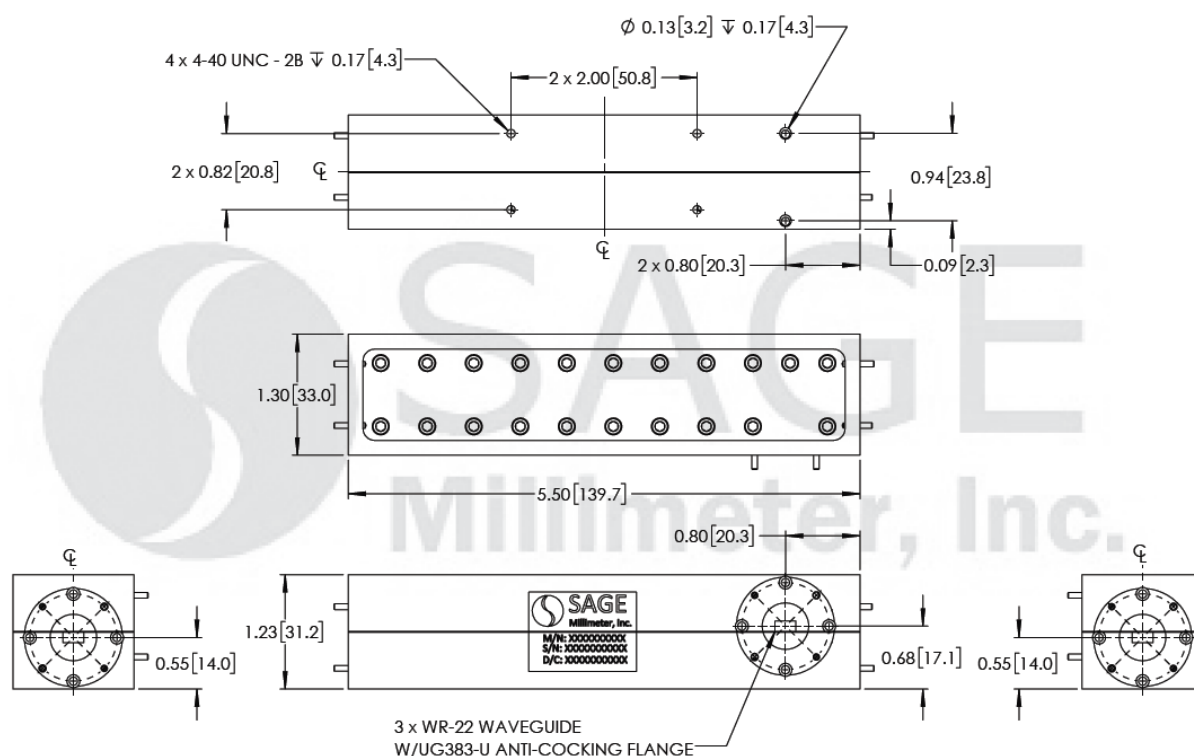


www.sagemillimeter.com | 3043 Kashiwa Street, Torrance, CA 90505
Phone: 424-757-0168 | Fax: 424-757-0188 | Email: sales@sagemillimeter.com

Q-Band Waveguide Directional Coupler, 40 dB

Item	Specification
Through Ports	WR-22 Waveguide with UG-383/U Anti-Cocking Flange
Coupled Port	WR-22 Waveguide with UG-383/U Anti-Cocking Flange
Size	5.50" (L) X 1.30" (W) x 1.25" (H)
Material	Brass
Finish	Gold Plated
Weight	1.58 Lb
Outline	WD-SB-Q-A

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

**Note:**

- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.

Caution:

- Any foreign objects in the waveguide will degrade performance and/or damage the device.

