

DATA SHEET

# OLI600: Miniature High-Speed Schmitt Trigger Optocoupler for Hybrid Assembly

## Features

- Performance guaranteed over -55 °C to +125 °C ambient temperature range
- Guaranteed minimum CMR transient immunity >1000 V/μs @ 300 V<sub>CM</sub>
- 1500 V<sub>DC</sub> electrical isolation
- Microprocessor-compatible drive
- On/off threshold hysteresis
- Fast switching: t<sub>r</sub>, t<sub>f</sub> = 10 ns typical

## Description

The OLI600 has an LED and integrated high-speed detector that are mounted and coupled in a miniature custom ceramic package, which provides 1500 V<sub>DC</sub> electrical isolation between the input and output. The light from the LED is collected by the photo-diode in the integrated detector. The integrated detector incorporates a Schmitt trigger, which provides hysteresis for noise immunity and pulse shaping and an open collector output. Typical propagation delay of this product is 170 ns. The Common Mode Rejection (CMR) transient immunity is greater than 1000 V/μs at 300 V<sub>CM</sub>.

Device mounting is achieved by a standard hybrid assembly with non-conductive epoxies. Gold or aluminum wire bonding can be used to make electrical connections for maximum placement flexibility.

**Note:** Certain cleaning processes may be harmful to this device. Contact Isolink for details.

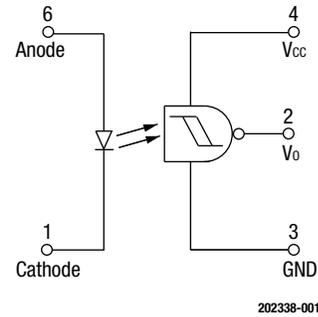


Figure 1. OLI600 Block Diagram

Figure 1 shows the OLI600 functional block diagram. Table 1 provides the OLI600 absolute maximum ratings. Table 2 provides the OLI600 electrical specifications.

Figures 2 and 3 illustrate the OLI600 typical performance characteristics. Figure 4 shows the OLI600 switching test circuit. Figure 5 provides the OLI600 package dimensions.

**Table 1. OLI600 Absolute Maximum Ratings <sup>1</sup>**

Parameter	Symbol	Minimum	Maximum	Units
<b><i>Coupled</i></b>				
Input to output isolation voltage <sup>2</sup>	V <sub>DC</sub>	-1500	+1500	V
Storage temperature range	T <sub>STG</sub>	-65	+150	°C
Operating temperature range	T <sub>A</sub>	-55	+125	°C
Mounting temperature range (3 minutes maximum)			+240	°C
Total power dissipation	P <sub>D</sub>		+250	mW
<b><i>Input Diode</i></b>				
Average input current	I <sub>DD</sub>		20	mA
Reverse voltage	V <sub>R</sub>		5	V
Power dissipation	P <sub>D</sub>		36	mW
<b><i>Output Detector</i></b>				
Peak output current			40	mA
Supply voltage	V <sub>CC</sub>		18	V
Output voltage	V <sub>OUT</sub>		18	V

<sup>1</sup> Exposure to maximum rating conditions for extended periods may reduce device reliability. There is no damage to the device with only one parameter set at the limit and all other parameters set at or below their nominal value. Exceeding any of the limits listed here may result in permanent damage to the device.

<sup>2</sup> Measured between pins 1 and 6 shorted together, and pins 2, 3, 4, and 5 shorted together. T<sub>A</sub> = 25 °C and duration = 1 s.

---

**ESD HANDLING:** *Although this device is designed to be as robust as possible, electrostatic discharge (ESD) can damage this device. This device must be protected at all times from ESD when handling or transporting. Static charges may easily produce potentials of several kilovolts on the human body or equipment, which can discharge without detection. Industry-standard ESD handling precautions should be used at all times.*

---

**Table 2. OLI600 Electrical Specifications <sup>1</sup>**  
**(T<sub>A</sub> = -55 °C to +125 °C, Unless Otherwise Noted)**

Parameter	Symbol	Test Condition	Minimum	Typical	Maximum	Units
Threshold Current, ON	I <sub>F(ON)</sub>	V <sub>CC</sub> = 15 V, R <sub>L</sub> = 680 Ω			10	mA
Hysteresis ratio	I <sub>F(OFF)</sub> I <sub>F(ON)</sub>	V <sub>CC</sub> = 15.0 V, R <sub>L</sub> = 680.0 Ω		0.8		
Low level output voltage	V <sub>OL</sub>	V <sub>CC</sub> = 15.0 V, R <sub>L</sub> = 680.0 Ω, I <sub>F</sub> = 5.0 mA		0.3	0.5	V
High level output current	I <sub>OH</sub>	V <sub>CC</sub> = V <sub>O</sub> = 15 V, I <sub>F</sub> = 0 mA			250	μA
Supply current:						
High level	I <sub>CCH</sub>	V <sub>CC</sub> = 15 V, I <sub>F</sub> = 0 mA		9	15	mA
Low level	I <sub>CCL</sub>	V <sub>CC</sub> = 15 V, I <sub>F</sub> = 10 mA		9	15	mA
Input:						
Forward voltage	V <sub>F</sub>	I <sub>F</sub> = 10.0 mA		1.6	2.4	V
Reverse current	I <sub>R</sub>	V <sub>R</sub> = 3.0 V			10.0	μA
Output leakage current <sup>2</sup>	I <sub>L_O</sub>	R <sub>H</sub> ≤ 50%, T <sub>A</sub> = 25 °C, V <sub>L_O</sub> = 1500.0 V <sub>DC</sub>			1.0	μA
Propagation delay time:						
High to low	t <sub>PHL</sub>	I <sub>F</sub> = 5 mA, V <sub>CC</sub> = 15 V, R <sub>L</sub> = 680 Ω, T <sub>A</sub> = 25 °C			300	ns
Fall time	t <sub>f</sub>	I <sub>F</sub> = 5 mA, V <sub>CC</sub> = 15 V, R <sub>L</sub> = 680 Ω, T <sub>A</sub> = 25 °C		10		ns
Low to high	t <sub>PLH</sub>	I <sub>F</sub> = 5 mA, V <sub>CC</sub> = 15 V, R <sub>L</sub> = 680 Ω, T <sub>A</sub> = 25 °C			300	ns
Rise time	t <sub>r</sub>	I <sub>F</sub> = 5 mA, V <sub>CC</sub> = 15 V, R <sub>L</sub> = 680 Ω, T <sub>A</sub> = 25 °C		10		ns
Common mode transient immunity:						
Logic high	CM <sub>H</sub>	V <sub>CM</sub> = 300 V peak, R <sub>L</sub> = 680 Ω, V <sub>CC</sub> = 15 V, I <sub>F</sub> = 0 mA, T <sub>A</sub> = 25 °C	1000	>10,000		V/μs
Logic low	CM <sub>L</sub>	V <sub>CM</sub> = 300 V peak, R <sub>L</sub> = 680 Ω, V <sub>CC</sub> = 15 V, I <sub>F</sub> = 5 mA, T <sub>A</sub> = 25 °C	1000	>10,000		V/μs

<sup>1</sup> Performance is guaranteed only under the conditions listed in the above table.

<sup>2</sup> Measured between pins 1 and 6 shorted together, and pins 2, 3, 4, and 5 shorted together. T<sub>A</sub> = 25°C and duration = 1 s.

### Typical Performance Characteristics

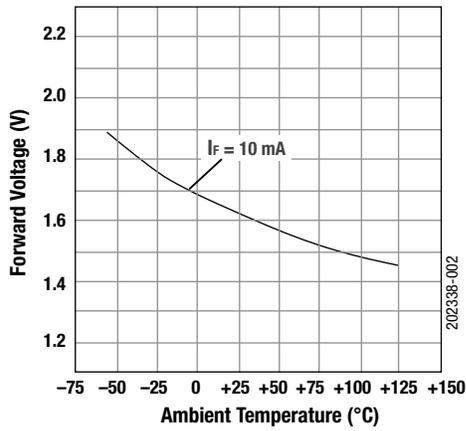


Figure 2. Forward Voltage vs Temperature

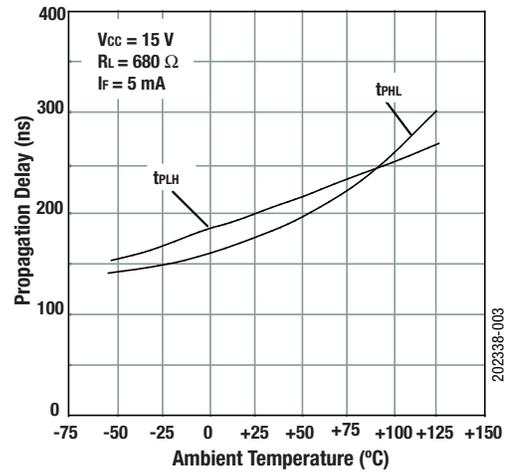


Figure 3. Propagation Delay vs Temperature



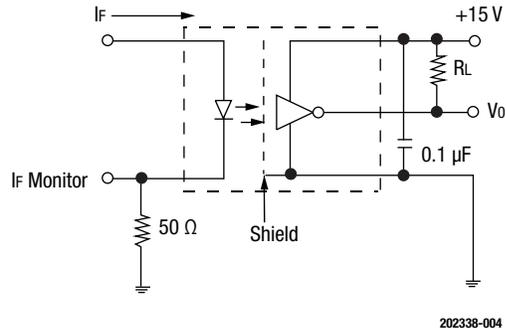


Figure 4. OLI600 Switching Test Circuit

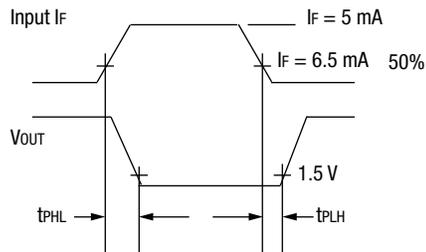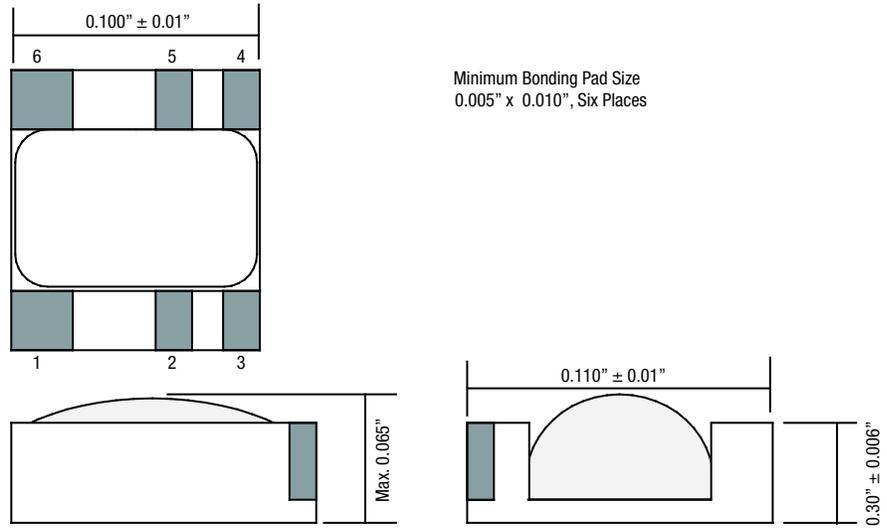

202338-005

**Figure 5. OLI600 Package Dimensions**

## Ordering Information

Model Name	Manufacturing Part Number
OLI600: Miniature High-Speed Schmitt Trigger Optocoupler for Hybrid Assembly	OLI600

Copyright © 2012-2013, 2017 Isolink, Inc. All Rights Reserved.

Information in this document is provided in connection with Isolink, Inc. (“Isolink”), a wholly-owned subsidiary of Skyworks Solutions, Inc. These materials, including the information contained herein, are provided by Isolink as a service to its customers and may be used for informational purposes only by the customer. Isolink assumes no responsibility for errors or omissions in these materials or the information contained herein. Isolink may change its documentation, products, services, specifications or product descriptions at any time, without notice. Isolink makes no commitment to update the materials or information and shall have no responsibility whatsoever for conflicts, incompatibilities, or other difficulties arising from any future changes.

No license, whether express, implied, by estoppel or otherwise, is granted to any intellectual property rights by this document. Isolink assumes no liability for any materials, products or information provided hereunder, including the sale, distribution, reproduction or use of Isolink products, information or materials, except as may be provided in Isolink Terms and Conditions of Sale.

THE MATERIALS, PRODUCTS AND INFORMATION ARE PROVIDED “AS IS” WITHOUT WARRANTY OF ANY KIND, WHETHER EXPRESS, IMPLIED, STATUTORY, OR OTHERWISE, INCLUDING FITNESS FOR A PARTICULAR PURPOSE OR USE, MERCHANTABILITY, PERFORMANCE, QUALITY OR NON-INFRINGEMENT OF ANY INTELLECTUAL PROPERTY RIGHT; ALL SUCH WARRANTIES ARE HEREBY EXPRESSLY DISCLAIMED. ISOLINK DOES NOT WARRANT THE ACCURACY OR COMPLETENESS OF THE INFORMATION, TEXT, GRAPHICS OR OTHER ITEMS CONTAINED WITHIN THESE MATERIALS. ISOLINK SHALL NOT BE LIABLE FOR ANY DAMAGES, INCLUDING BUT NOT LIMITED TO ANY SPECIAL, INDIRECT, INCIDENTAL, STATUTORY, OR CONSEQUENTIAL DAMAGES, INCLUDING WITHOUT LIMITATION, LOST REVENUES OR LOST PROFITS THAT MAY RESULT FROM THE USE OF THE MATERIALS OR INFORMATION, WHETHER OR NOT THE RECIPIENT OF MATERIALS HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Isolink products are not intended for use in medical, lifesaving or life-sustaining applications, or other equipment in which the failure of the Isolink products could lead to personal injury, death, physical or environmental damage. Isolink customers using or selling Isolink products for use in such applications do so at their own risk and agree to fully indemnify Isolink for any damages resulting from such improper use or sale.

Customers are responsible for their products and applications using Isolink products, which may deviate from published specifications as a result of design defects, errors, or operation of products outside of published parameters or design specifications. Customers should include design and operating safeguards to minimize these and other risks. Isolink assumes no liability for applications assistance, customer product design, or damage to any equipment resulting from the use of Isolink products outside of stated published specifications or parameters.

Isolink is a trademark of Isolink Inc. in the United States and other countries. Skyworks and the Skyworks symbol are trademarks or registered trademarks of Skyworks Solutions, Inc., in the United States and other countries. Third-party brands and names are for identification purposes only, and are the property of their respective owners.