


Description:

Model Number: PS-2931-292FF is a 29 - 31 GHz Analog Phase Shifter. This phase shifter is supplied in our standard PE2 housing that can be used as a SMA connectorized or a surface mount component.

Specifications:

Frequency Range: 29 to 31 GHz
Phase Shift Range: 0° to 360° Max
Insertion Loss: 10 dB Max
Input Power: 20dBm Max
Return Loss (In/Out): 5 dB Max.
Control Voltage Range: -0.5 to +0.7 VDC at 20mA Max.

Typical Performance:

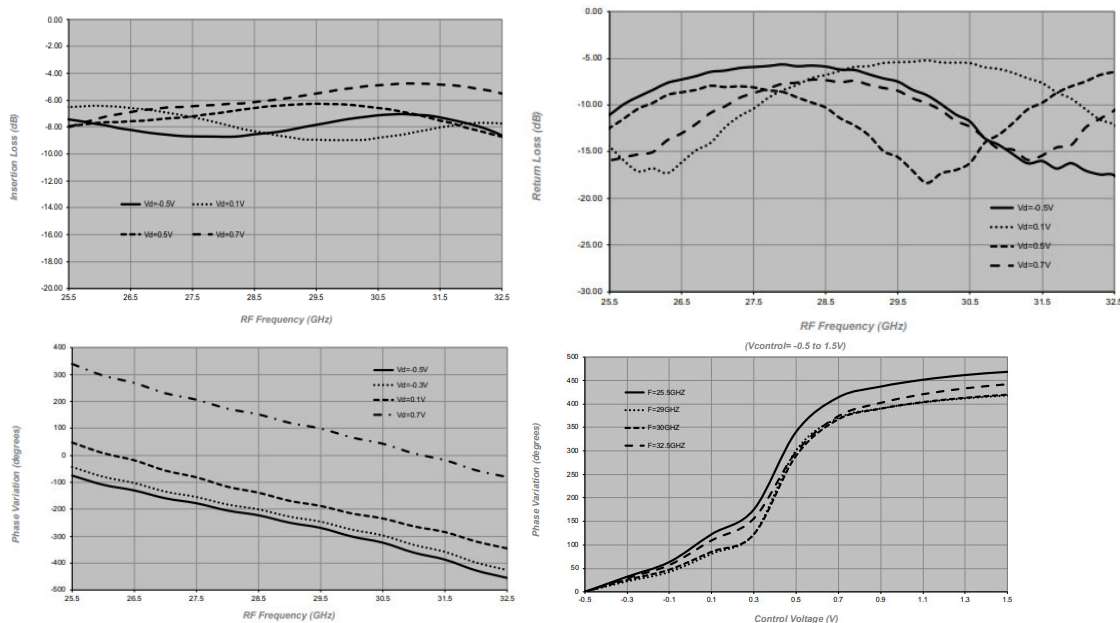

Environmental Ratings:


Temperature: -40 to +85 Deg. C (Operating)
-65 to +150 Deg. C (Storage)
Humidity: MIL-STD-202F, METHOD 103B COND B.
Shock: MIL-STD-202F, METHOD 213B COND B.
Altitude: MIL-STD-202F, METHOD 105C COND B.
Temperature Cycle: MIL-STD-202F, METHOD 107D COND A

Note: The above specifications are subject to change or revision.


ALL DIMENSIONS ARE IN INCHES
TOLERANCES:
X.XX ±0.020
X.XXX ±0.010

REVISIONS			
ZONE	REV.	DESCRIPTION	DATE
	—	PRELIMINARY	8/6/2019
	1	UPDATED MODEL NUMBER	8/6/2019

PE2 HOUSING WITH CARRIER

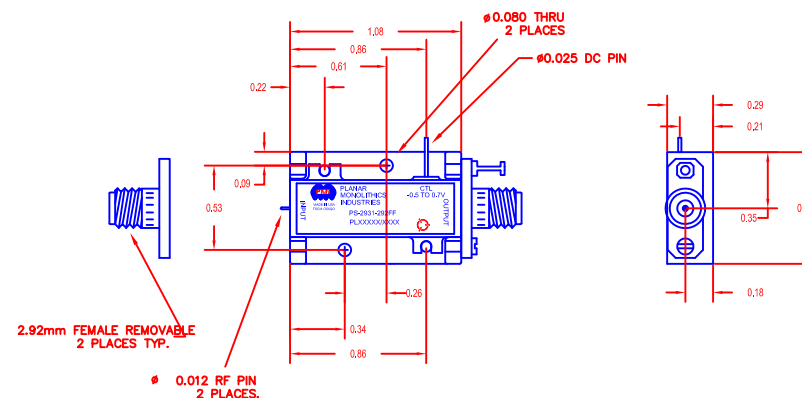

PE2 HOUSING WITHOUT CARRIER (SURFACE MOUNT)

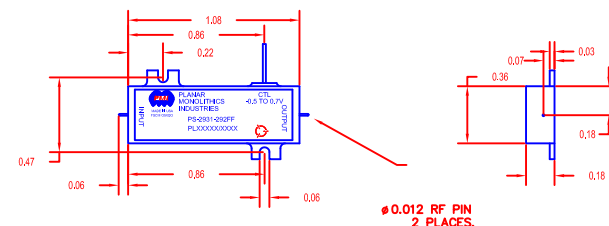

PMI CONFIDENTIAL AND PROPRIETARY

PLANAR MONOLITHICS INDUSTRIES, INC.

7311-F GROVE ROAD
FREDERICK, MARYLAND 21704 USA
TEL: 301-662-5019 FAX: 301-662-1731
WEBSITE: www.pmi-rf.com
E-MAIL: sales@pmi-rf.com
ISO 9001 CERTIFIED



APPROVALS		DATE		TITLE	
DRAWN		8/6/19		PRODUCT FEATURE	
CHECKED				PS-2931-292FF	
ISSUED					
SIZE		FSCM NO.		DWG NO.	
A		05XQ0		PRELIMINARY	
SCALE		N: S		SHEET	
				1 OF 1	