KR Electronics, Inc.


General Description

KR Electronics part number 3402-SMA is a 1225 MHz bandpass filter. The filter has a min 3 dB bandwidth of 550 MHz. Other center frequencies and are bandwidths available. Please consult the factory.

Features

- 1225 MHz Bandpass
- 3 dB Bandwidth 550 MHz min
- 35 dB Bandwidth 650 MHz max
- Highly Selective Elliptic Type Filter
- 50 Ω Source and Load
- SMA Connectors


Typical Performance

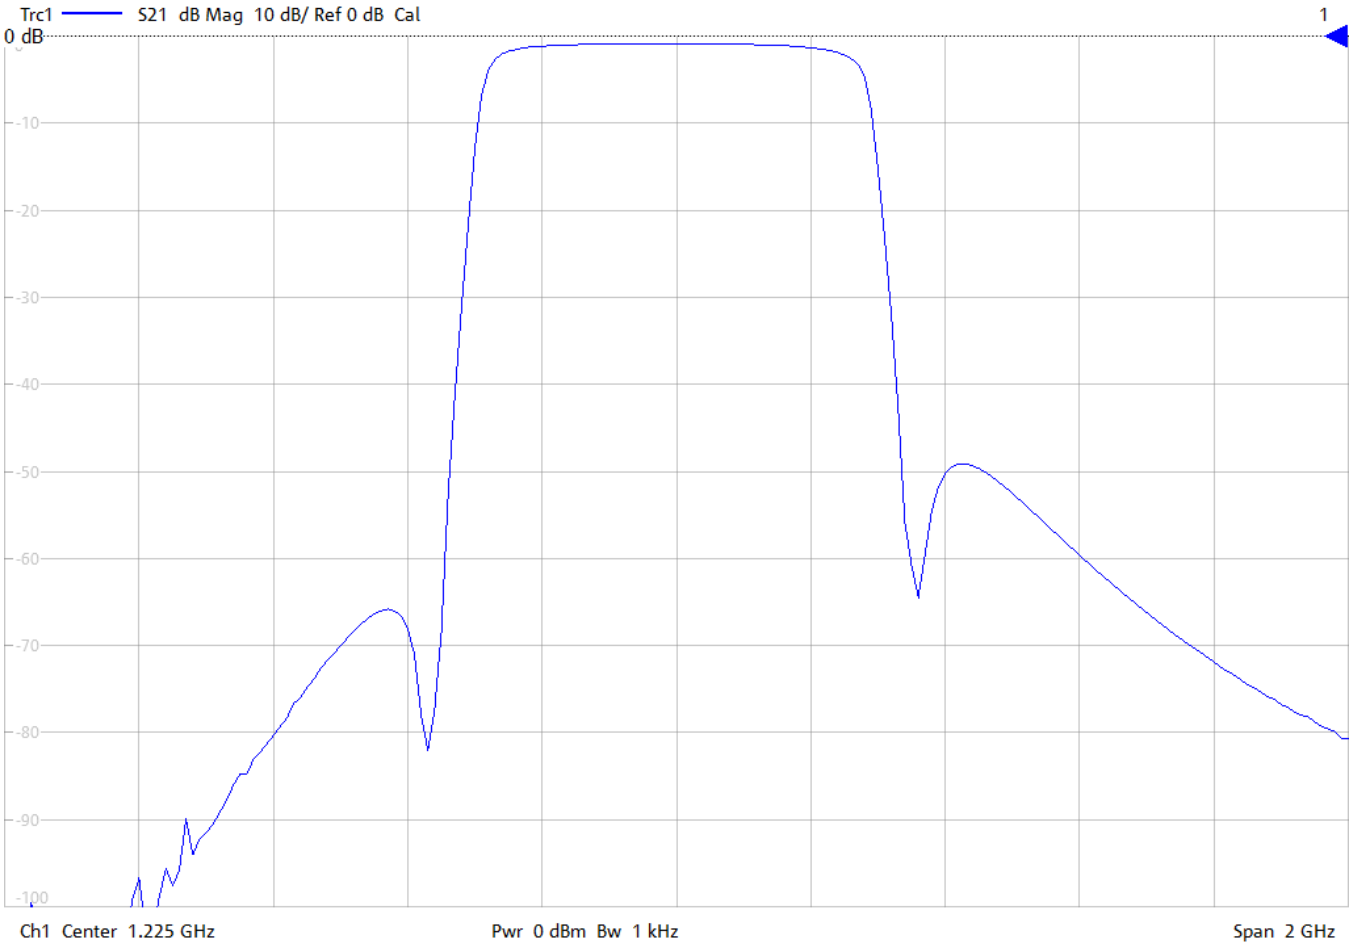


KR Electronics, Inc.
91 Avenel Street
Avenel, NJ 07001

Web *www.krfilters.com*
Email *sales@krfilters.com*
Phone *(732) 636-1900*

© 2019, KR Electronics, Inc.

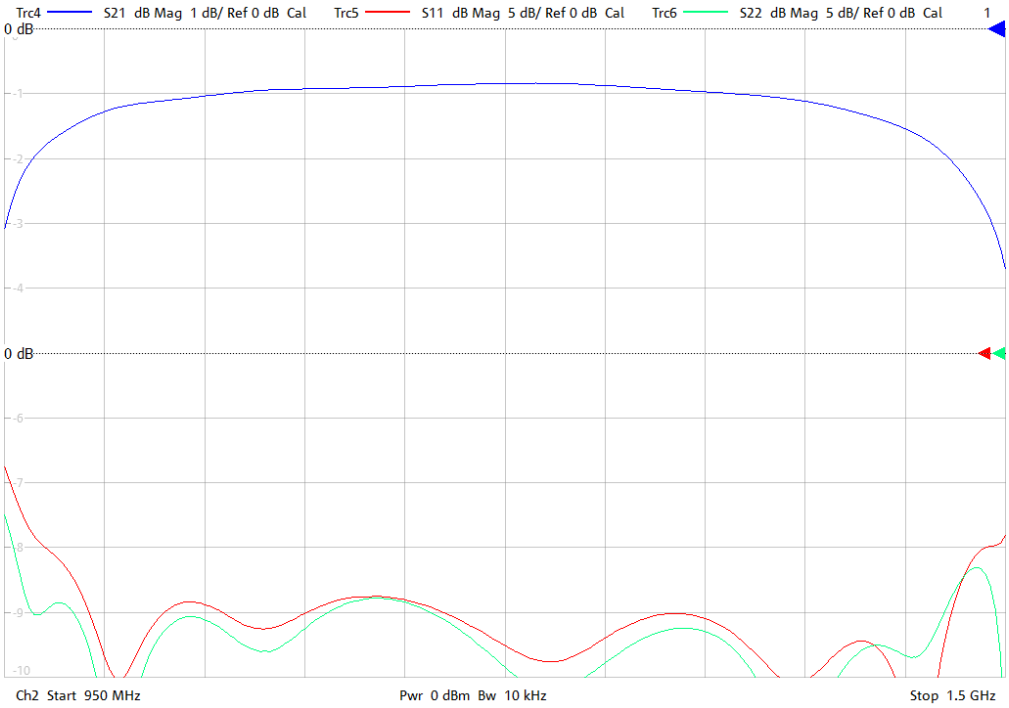

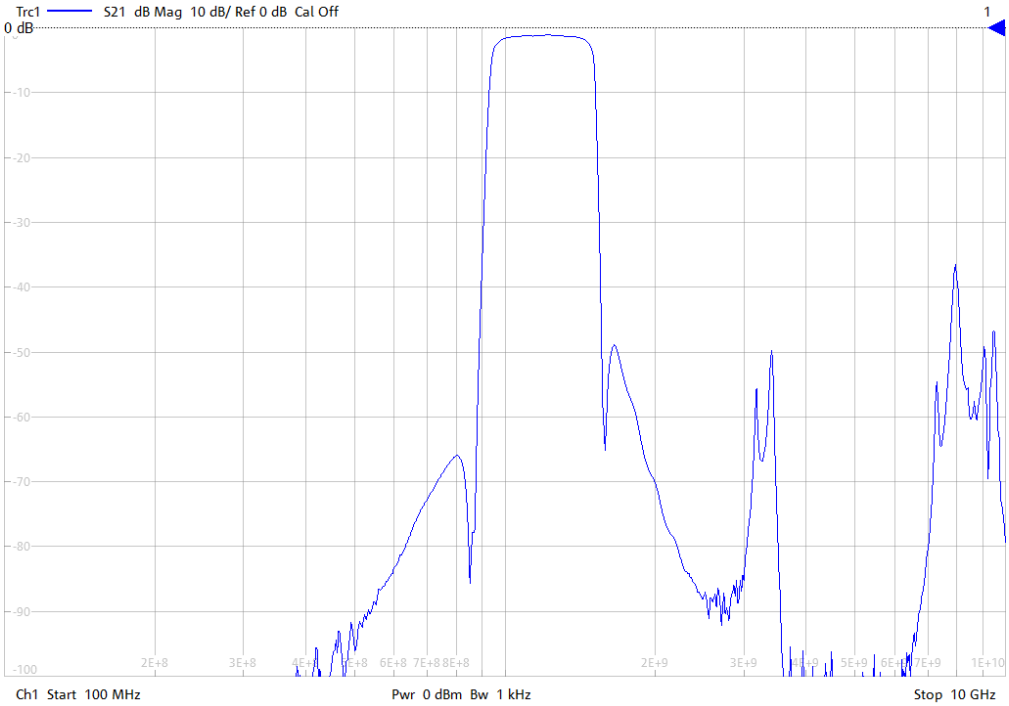

KR Electronics, Inc.
91 Avenel Street
Avenel, NJ 07001

Web *www.krfilters.com*
Email *sales@krfilters.com*
Phone *(732) 636-1900*
Fax *(732) 636-1982*

© 2019, KR Electronics, Inc.


KR Electronics 3402-SMA

Specifications

Parameter	Specification	
Filter type	Bandpass	
Center Frequency	1225 MHz	
Insertion Loss	2 dB max	1 dB typical
3 dB Bandwidth	550 MHz min	
35 dB Bandwidth	650 MHz max	35 dB min Rejection to 5 GHz min
Source and Load	50 Ω	

Physical Dimensions



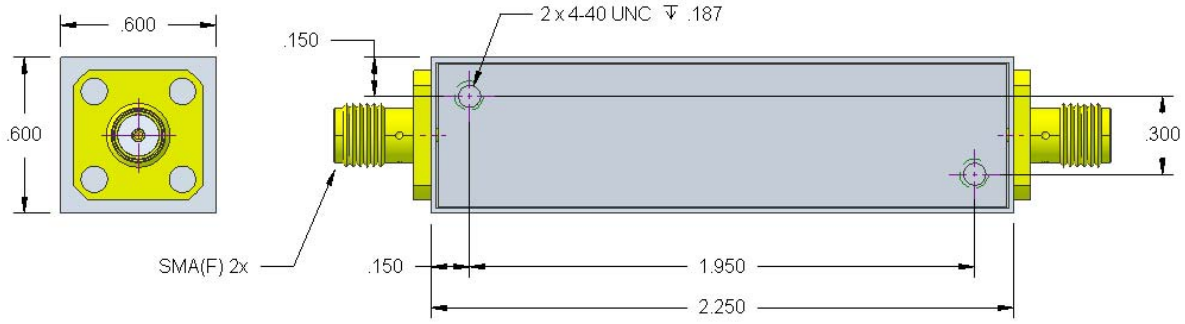

Notes:
1. Dimensions in inches
2. Metal Case
3. SMA(F) Connectors

KR Electronics, Inc.
91 Avenel Street
Avenel, NJ 07001

Web *www.krfilters.com*
Email *sales@krfilters.com*
Phone *(732) 636-1900*
Fax *(732) 636-1982*

© 2019, KR Electronics, Inc.