


General Description

KR Electronics part number 3352-F is a 1500 MHz Wide Band Band Reject filter. Other center frequencies and bandwidths are available. Please consult the factory.

Features

- 1500 MHz Band Reject Filter
- Passband DC-250 MHz: 1 dB max
- Passband 2600-2800 MHz: 2 dB max
- 40 dB min Stopband: 800-2200 MHz
- 75 Ω Source and Load
- Other frequencies available
- F Connectors

Typical Performance

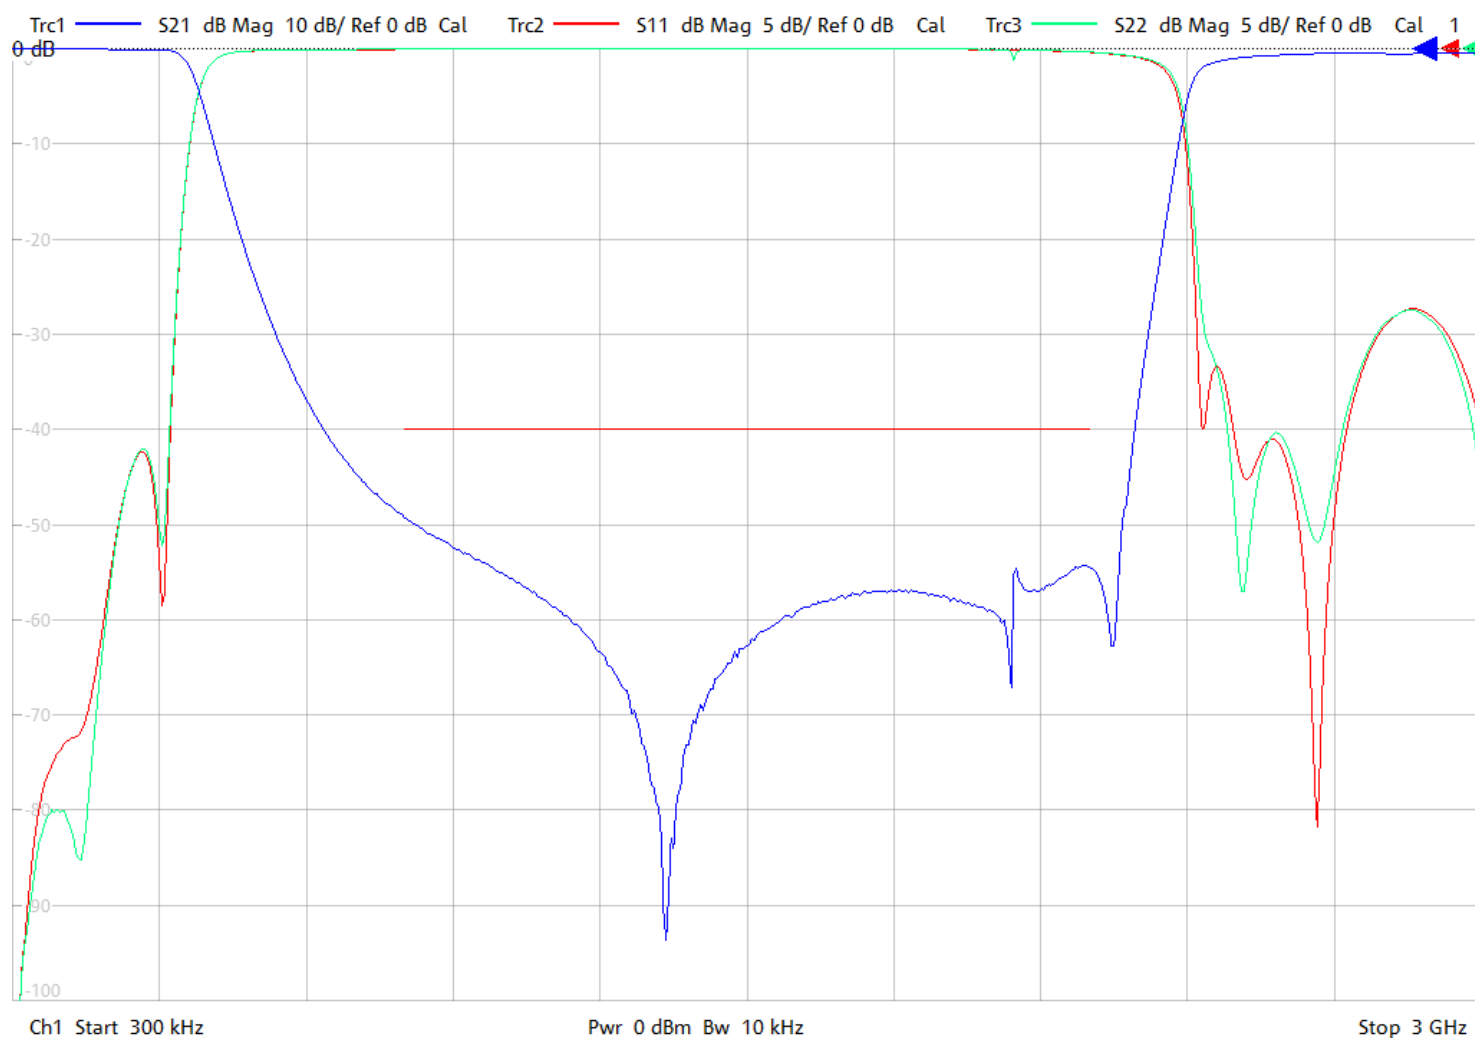

KR Electronics, Inc.
91 Avenel Street
Avenel, NJ 07001


Web www.krfilters.com
Email sales@krfilters.com
Phone (732) 636-1900
Fax (732) 636-1982

KR Electronics 3352-F

Specifications

Parameter	Specification	Notes
Filter type	Band Reject	
Lower Passband DC to 250 MHz	1 dB max	< 0.5 dB typical
Stopband 800 to 2200 MHz	40 dB min	
Upper Passband 2600-2800 MHz	2 dB max	< 1 dB typical
Source and Load	75 Ω	

Physical Dimensions

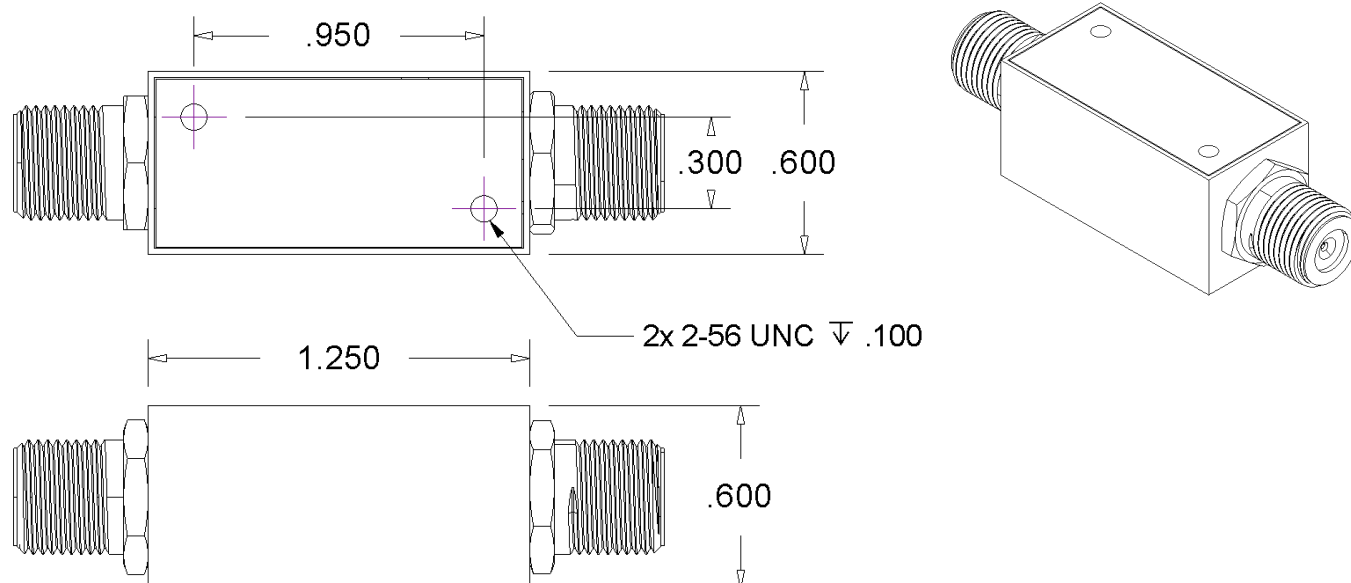

Notes:

1. Dimensions in inches
2. Metal Case
3. F Connectors In/Out

KR Electronics, Inc.
91 Avenel Street
Avenel, NJ 07001

Web www.krfilters.com
Email sales@krfilters.com
Phone (732) 636-1900
Fax (732) 636-1982