


General Description

KR Electronics part number 3375 is a 2000 to 4000 MHz linear slope equalizer. The slope is 9 dB $\pm$ 1 dB. Other frequencies are available. Please consult the factory.

Features

- Linear Slope Equalizer
- 2000 MHz to 4000 MHz
- Slope 9 dB $\pm$ 1 dB
- Deviation from Linear $\pm$ 0.5 dB max
- 50 Ω Source and Load
- Surface Mount
- Other frequencies available



Typical Performance

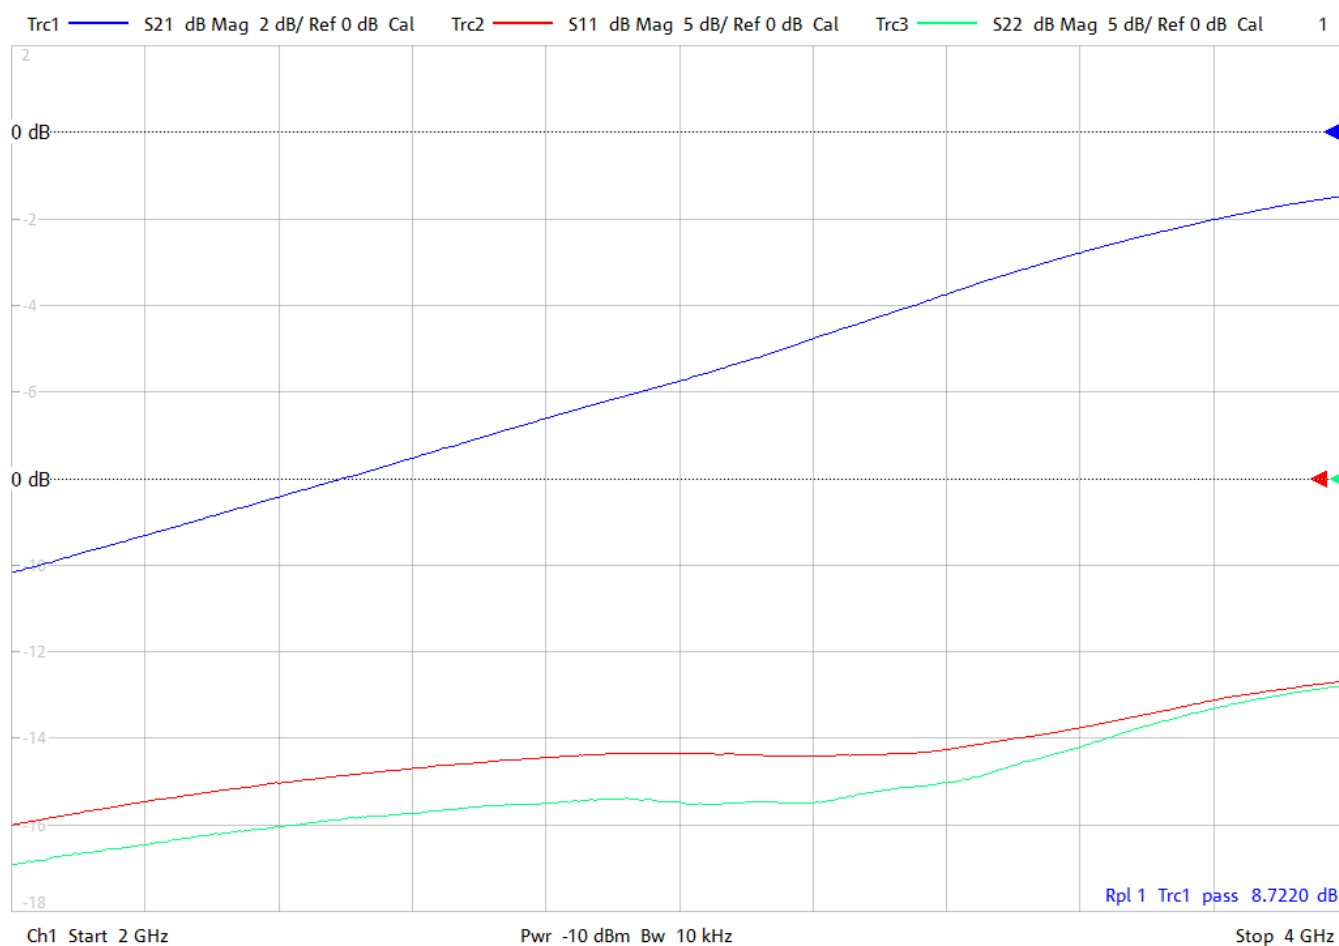

KR Electronics, Inc.
91 Avenel Street
Avenel, NJ 07001

Web www.krfilters.com
Email sales@krfilters.com
Phone (732) 636-1900
Fax (732) 636-1982

KR Electronics 3375

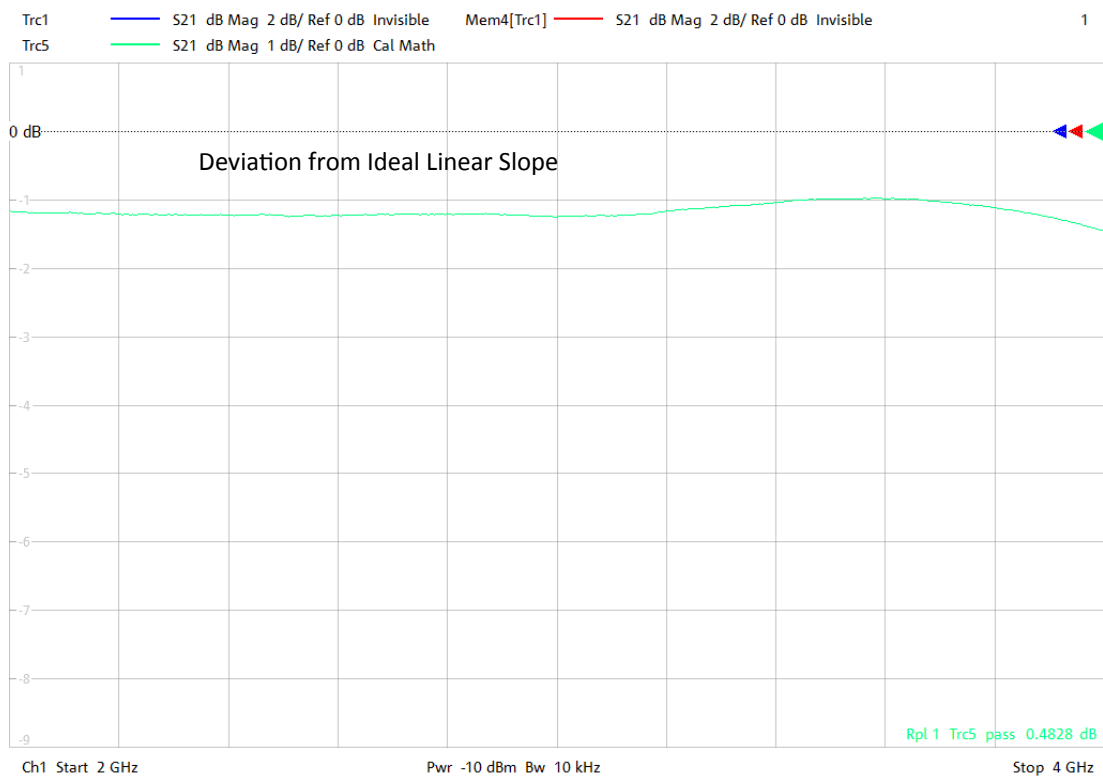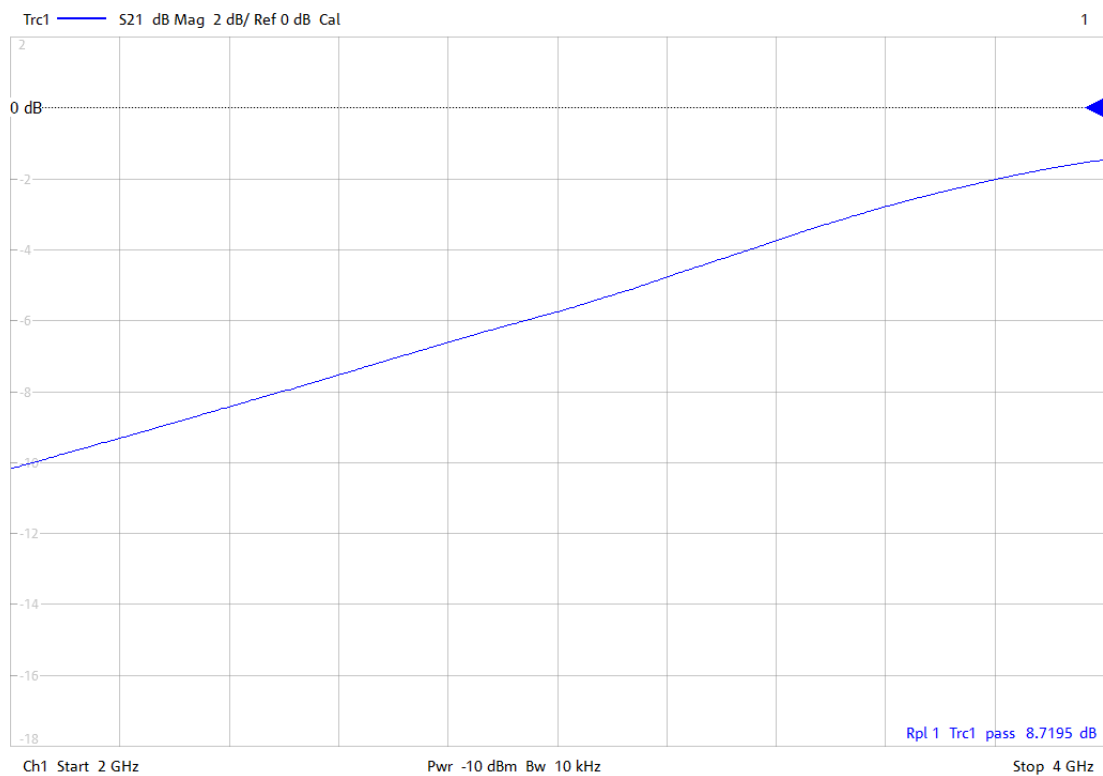

KR Electronics, Inc.
91 Avenel Street
Avenel, NJ 07001


Web www.krfilters.com
Email sales@krfilters.com
Phone (732) 636-1900
Fax (732) 636-1982

KR Electronics 3375

Specifications

Parameter	Specification
Filter type	Equalizer
Frequency Band	2000 to 4000 MHz
Insertion Loss at 4000 MHz	3 dBa max
Loss at 750 MHz - Loss at 1250 MHz	9 dB $\pm$ 1.dB
Deviation from Linear Slope 2000 MHz to 4000 MHz	$\pm$ 0.5 dB max
Source and Load	50 Ω

Physical Dimensions

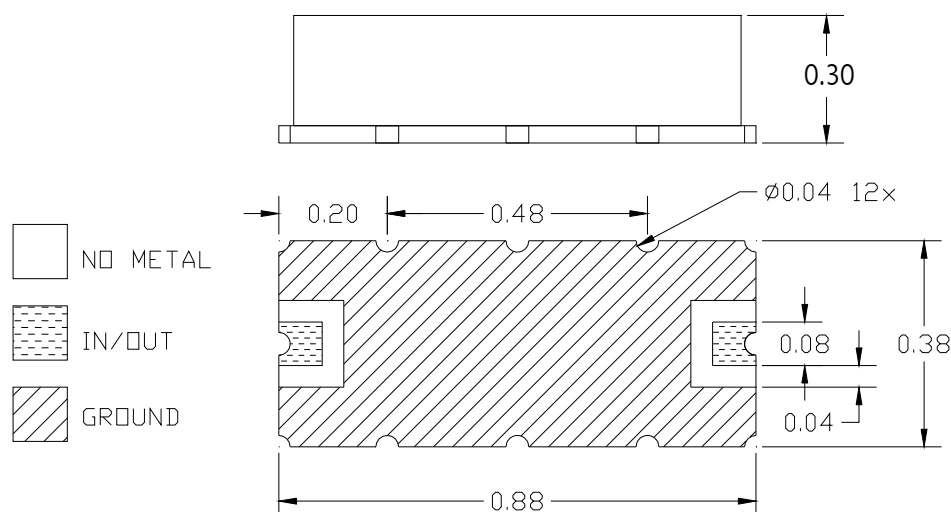

Notes:

1. Surface mount package
2. Dimensions in inches
3. Max reflow temperature 230° C for 10 sec
4. If boards are cleaned after installation units must be completely dried