

V-Band Balanced Mixer, Anti-Cocking Flange

Description:

Model SFB-15-N1-A is a V Band balanced mixer that utilizes high performance GaAs Schottky beam-lead diodes and a balanced circuit configuration to offer superior RF performance. This mixer is designed with anti-cocking flanges to further improve waveguide interface contact and reduce leakage. The mixer supports the full waveguide band operation for both LO and RF frequencies from 50 to 75 GHz with an extremely broad IF output from DC to 25 GHz. The mixer offers a conversion loss of 9 dB typical and a high RF to LO port isolation of 30 dB



Features:

- Full Waveguide Band Coverage
- Low Conversion Loss
- High IF Frequency up to 25 GHz

Applications:

- IEEE 802.11.ad WiGig System
- Radar Systems
- Communication Systems
- Test Equipment

Electrical Specifications:

Parameter	Minimum	Typical	Maximum
RF Frequency	50 GHz		75 GHz
LO Frequency	50 GHz		75 GHz
IF Frequency	DC		25 GHz
LO Pumping Power	+10 dBm	+13 dBm	+15 dBm
Conversion Loss		9 dB	12 dB
Input P _{1dB}		-3 dBm	
RF to LO Isolation		30 dB	
Combined RF and LO Power			+18 dBm
Specification Temperature		+25 °C	
Operating Temperature	-40 °C		+85 °C

Note: The RF input P-1 dB is LO pumping power related. The value shown is at LO power +13 dBm. The higher the LO power, the higher the input P-1dB

Mechanical Specifications:

Item	Specification
RF Port	WR-15 Waveguide with Anti-Cocking UG-385/U Flange
LO Port	WR-15 Waveguide with Anti-Cocking UG-385/U Flange
IF Port	K(F)
Case Material	Aluminum
Finish	Gold Plated
Weight	0.8 Oz
Size	1.16" (L) X 0.75" (W) X 0.75" (H)
Outline	FB-NV-A




www.sagemillimeter.com | 3043 Kashiwa Street, Torrance, CA 90505
Phone: 424-757-0168 | Fax: 424-757-0188 | Email: sales@sagemillimeter.com




V-Band Balanced Mixer, Anti-Cocking Flange

Typical Conversion Loss vs. Frequency

RF: -20 dBm; LO: +13 dBm

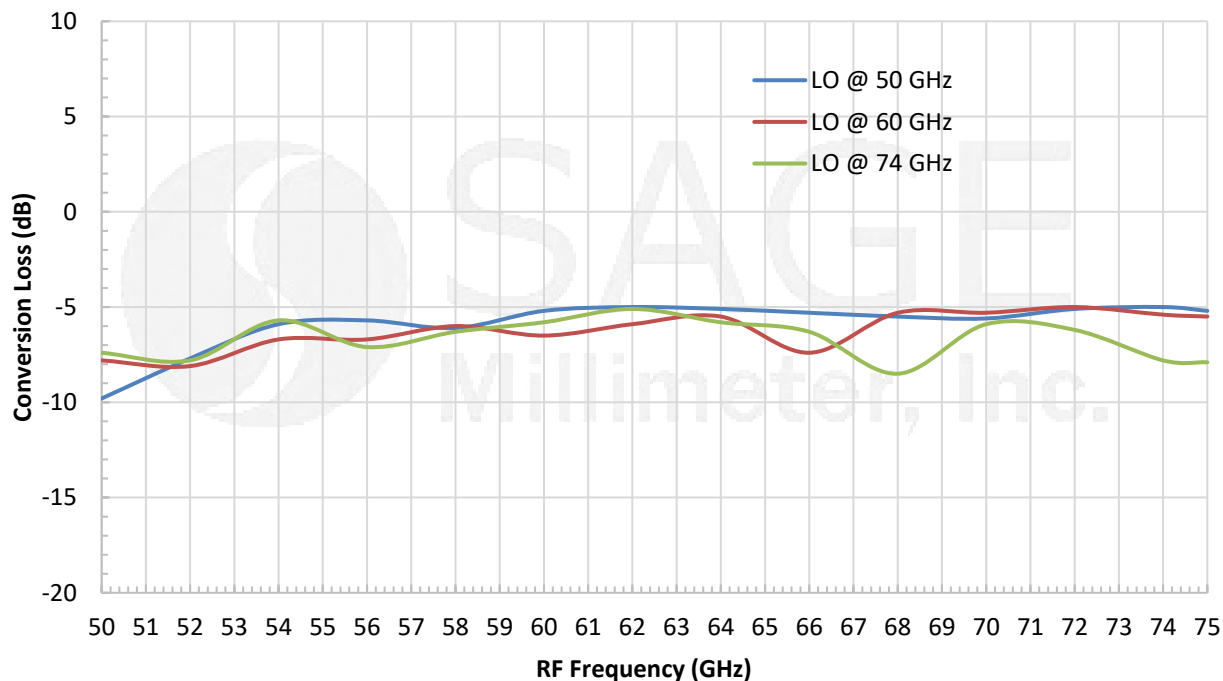

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches)

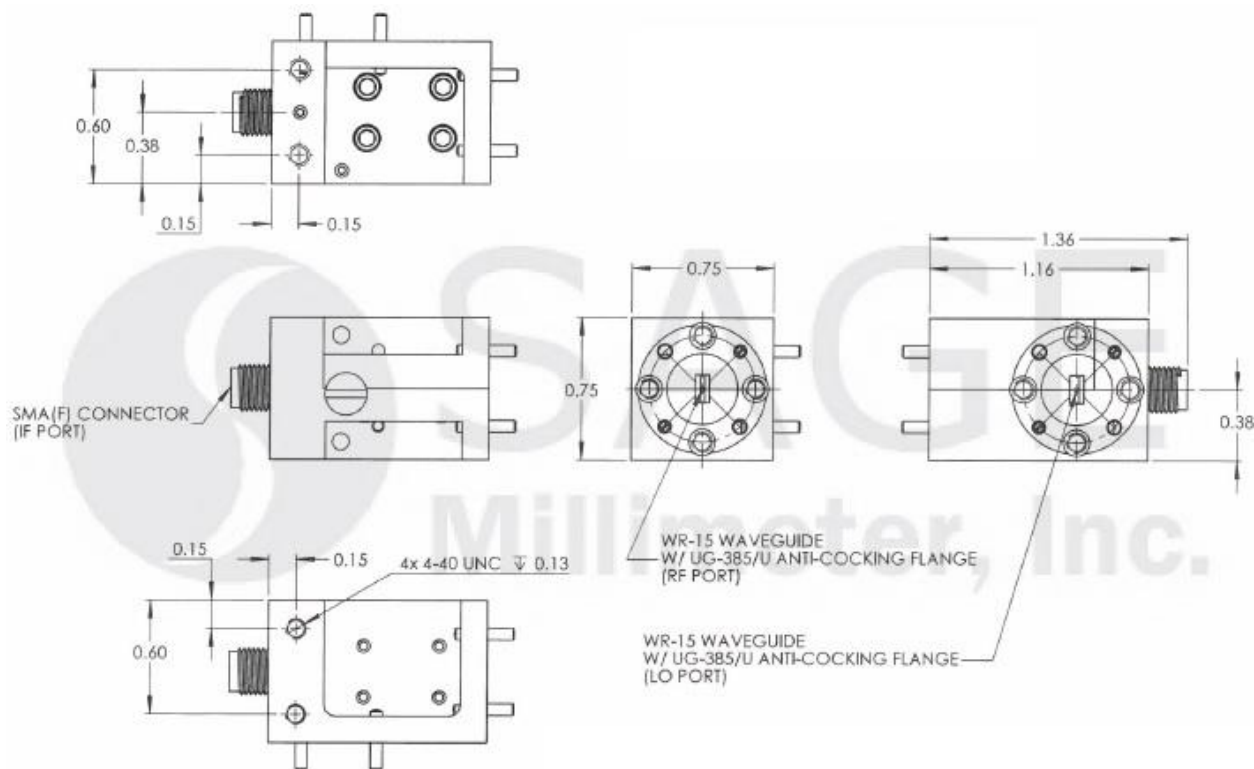



V-Band Balanced Mixer, Anti-Cocking Flange

Note:

- All data presented is collected from a sample lot. Actual data may vary unit to unit slightly.
- All testing was performed under +25 °C case temperature.
- A DC block at IF port may be required when connecting to a device, such as an IF low noise amplifier or a base band mixer which input port is DC coupled.
- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.

Caution:

- Exceeding absolute maximum ratings shown will damage the device.
- The device is static sensitive. Always follow ESD rules when working with the device.
- The IF port of the mixer is DC coupled. Use a DC block when connecting to other devices.
- **Never apply an external bias voltage to the IF port because the mixer will be damaged.**
- Any foreign objects in the waveguide will cause performance degradation and can possibly damage the device.
- Proper torque, 8.0 ± 0.15 inch-pounds (0.92 ± 0.05 Nm), should be applied. **SAGE Millimeter torque wrench, model SCH-08008-S1, is highly recommended.**

