
PB-12-G

2-WAY SURFACE MOUNT HIGH POWER DIVIDER



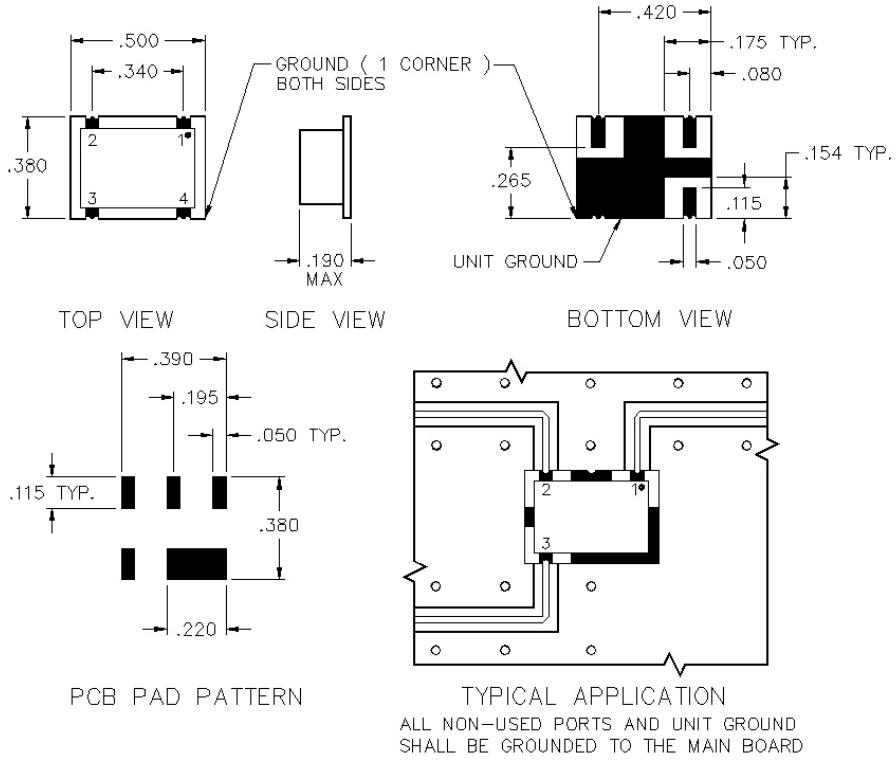

SPECIFICATIONS

Name:	PB-12-G
Frequency Range:	2.3-2.7 GHz
Insertion Loss:	0.7 dB max.
Isolation:	18 dB min.
Amplitude Balance:	0.3 dB max.
Phase Balance:	3° max.
VSWR:	1.40:1 max.
Input Power:	10 watts max.
Package Type:	Surface

Input power is specified for load VSWR better than 1.20:1.

PORT CONFIGURATION

Input:	1
Output:	2, 3
Ground:	4

Dimensions are in inches. Decimal tolerance: 2 Place: ± .02, 3 Place: ± .010
All specifications are subject to change without notice at any time. Rev: 190326

www.pulsarmicrowave.com · 48 Industrial St West, Clifton NJ 07012 · Tel: 973-779-6262 · Fax: 973-779-2727 · sales@pulsarmicrowave.com