
Surface Mount

Bandpass Filter

BPF-B503+

50Ω 495 to 510 MHz



CASE STYLE: HZ1198

Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power Input	0.5W Max.

Permanent damage may occur if any of these limits are exceeded.

Pin Connections

INPUT	1
OUTPUT	2
GROUND	3, 4, 5, 6

Features


- Linear Phase, up to ± 2 deg Typ @ Fc ± 15 MHz
- High Rejection
- Shielded case
- Aqueous washable

+RoHS Compliant
The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Applications

- Test Setup
- Harmonic Rejection
- Transmitters / Receivers

Outline Drawing

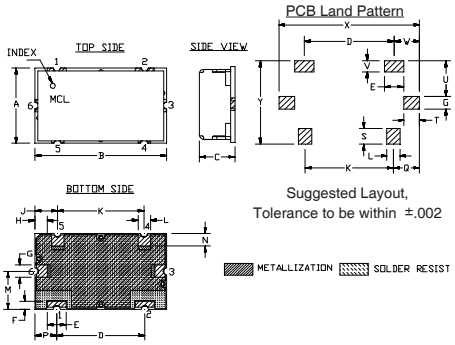


Outline Dimensions (inch / mm)

A	B	C	D	E	F	G	H	J	K	L	M
.472"	.826"	.220"	.551"	.118"	.047"	.078"	.076"	.142"	.543"	.078"	.236"
11.99	20.98	5.59	14.00	3.00	1.19	1.98	1.92	3.61	13.79	1.98	5.99

N	P	Q	S	T	U	V	W	X	Y	wt
.079"	.138"	.162"	.098"	.096"	.217"	.067"	.157"	.866"	.512"	grams
2.01	3.51	4.11	2.49	2.44	5.51	1.70	3.99	22.00	13.00	6.0

Demo Board MCL P/N: TB-400+
Suggested PCB Layout (PL-247)

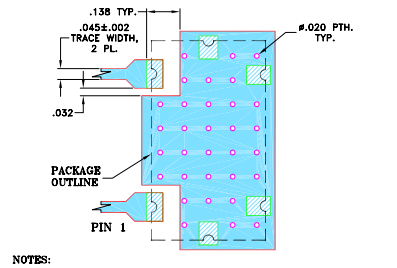

NOTES:
1. TRACE WIDTH IS SHOWN FOR FR4 WITH DIELECTRIC THICKNESS .025"±.002". COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.


DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)

DENOTES COPPER LAND PATTERN FREE OF SOLDERMASK


Bandpass Filter Electrical Specifications (T_{AMB}= 25°C)

CENTER FREQ. (MHz)	PASSBAND (MHz)	STOPBANDS (MHz)				MAXIMUM DEVIATION FROM LINEAR PHASE (deg.)	VSWR (:1)		
	(Loss < 5dB)	Loss > 20dB		Loss > 40dB			Passband		Stopband
Fc	F1 - F2	F3	F4	F5	F6	Fc ± 15 MHz	Typ.	Max.	Typ.
503	495 - 510	440	565	400	610 - 2600	± 5	1.5	2.0	30

Typical Frequency Response

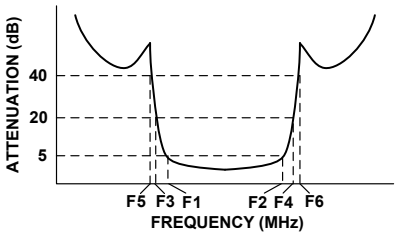


Functional Schematic

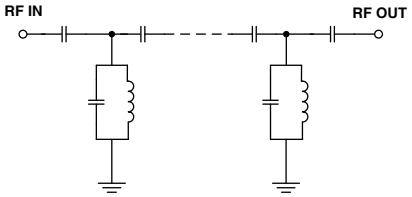


Typical Performance Data at 25°C

Frequency (MHz)	Insertion Loss (dB) $\bar{x}$	Insertion Loss (dB) σ	Return Loss (dB)	Frequency (MHz)	Deviation from Linear Phase (deg.)
0.5	83.02	0.71	0.11	488.0	-1.93
400.0	53.02	0.41	0.18	489.0	-1.58
440.0	31.89	0.57	0.47	490.0	-1.25
455.0	19.85	0.75	1.14	492.0	-0.66
465.0	10.30	0.61	6.26	494.0	-0.16
470.0	5.76	0.40	10.55	496.0	0.26
495.0	2.92	0.04	18.91	498.0	0.60
499.0	2.84	0.04	22.72	500.0	0.86
503.0	2.92	0.07	18.57	501.0	0.97
505.0	3.09	0.12	16.57	502.0	1.04
510.0	3.52	0.23	12.61	504.0	1.13
520.0	6.12	0.66	6.27	506.0	1.08
530.0	11.91	0.89	2.92	507.0	1.01
550.0	25.33	0.67	1.09	509.0	0.73
565.0	32.43	0.57	0.62	510.0	0.54
610.0	50.26	0.40	0.32	512.0	0.00
1600.0	75.43	0.49	0.23	514.0	-0.69
2600.0	52.44	0.19	0.36	518.0	-2.23



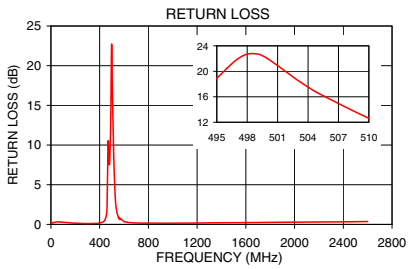

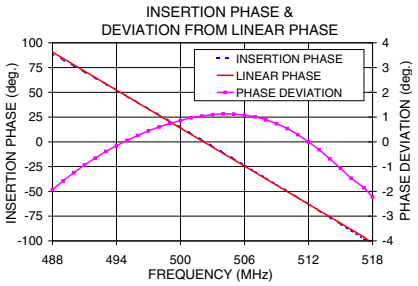

Notes
A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

Mini-Circuits®
www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. A
M151121
EDR-9175AUF1
BPF-B503+
URJ/RAV
161107