

Coaxial

Bandpass Filter

50Ω Constant Impedance 58 to 82 MHz

Maximum Ratings

Operating Temperature -55°C to 100°C

Storage Temperature -55°C to 100°C

RF Power Input 0.5W max.

Permanent damage may occur if any of these limits are exceeded.

Features

- low VSWR in pass- and stopbands, 1.3:1 typ
- rugged shielded case
- custom fo models available

Applications

- harmonic rejection
- lab use

SIF-70+




CASE STYLE: FF99

Connectors	Model
SMA	SIF-70+

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications


Outline Drawing

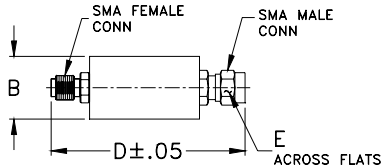


Outline Dimensions (inch/mm)

B	D	E	wt
.67	1.98	.312	grams
17.02	50.29	7.92	42.0

typical frequency response






electrical schematic

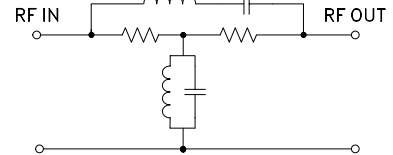

Typical Performance Data

Frequency (MHz)	Insertion Loss (dB)	Return Loss (dB)	Frequency (MHz)	Group Delay (nsec)
$\bar{x}$	σ			
1.0	36.56	0.2	4.4	1.965
1.7	32.08	0.2	4.5	1.803
2.4	29.16	0.2	8.4	2.416
3.0	27.01	0.2	12.2	2.736
3.7	25.26	0.2	16.1	2.984
4.4	23.82	0.2	17.0	3.059
6.0	21.13	0.2	26.2	3.326
12.7	14.61	0.2	35.1	3.817
16.0	12.53	0.2	43.9	4.422
20.0	10.51	0.2	44.7	4.419
28.3	7.27	0.2	57.9	5.270
36.7	4.76	0.2	58.9	5.288
45.0	2.79	0.1	62.0	5.357
58.0	0.77	0.1	65.3	5.248
63.7	0.34	0.1	68.8	5.146
70.0	0.24	0.1	72.4	4.843
74.7	0.35	0.1	75.0	4.639
105.0	2.87	0.1	79.0	4.231
110.0	3.34	0.2	81.8	3.959
166.7	7.80	0.2	83.2	3.803
223.3	11.10	0.2	105.9	2.168
280.0	13.80	0.3	107.8	2.082
290.0	14.28	0.3	166.0	0.886
423.3	20.50	0.9	222.6	0.581
490.0	24.04	1.4	278.6	0.458
500.0	24.60	1.5	342.8	0.360
512.5	25.30	1.5	348.7	0.351
525.0	25.98	1.6	421.7	0.199
537.5	26.70	1.6	484.2	0.031
550.0	27.34	1.4	492.6	0.079

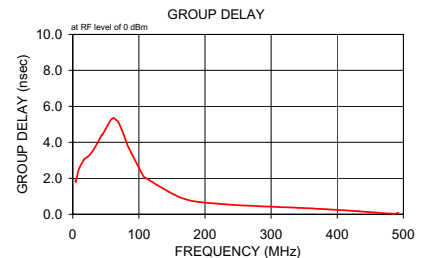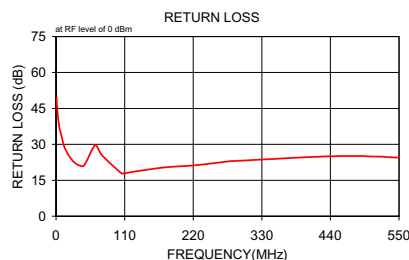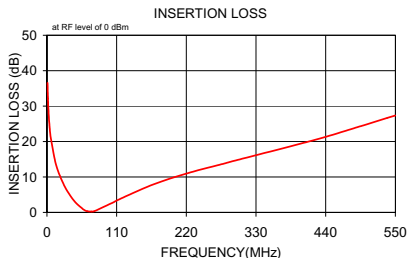

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. C
M151107
SIF-70+
151001