

Surface Mount

Power Splitter/Combiner

2 Way-0° 50Ω

2700 to 4000 MHz

SP-2L+



CASE STYLE: CA531


Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-65°C to 150°C
Power Input (as a splitter)	0.75W max.
Internal Dissipation	0.375W max.
Permanent damage may occur if any of these limits are exceeded.	

Pin Connections

SUM PORT	5
PORT 1	1
PORT 2	3
GROUND	2,4,6


Outline Drawing

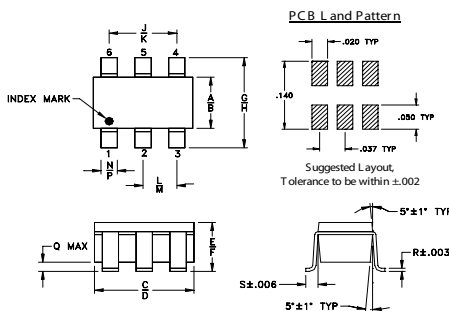

Outline Dimensions (inch)

A	B	C	D	E	F	G	H	J
.052	.067	.106	.122	.035	.064	.087	.118	.067
1.32	1.70	2.69	3.10	0.89	1.63	2.21	3.00	1.70
K	L	M	N	P	Q	R	S	wt
.083	.033	.042	.012	.020	.012	.006	.018	grams
2.11	0.84	1.07	0.30	0.51	0.30	0.15	0.46	0.020

Demo Board MCL P/N: TB-374 Suggested PCB Layout (PL-232)

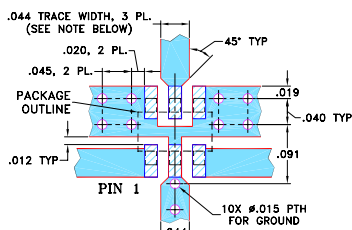

NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .020" ± .0015"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
- DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Notes

A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/MCLStore/terms.jsp

Features

- low insertion loss, 0.75 dB typ.
- good isolation, 18 dB typ.
- good output VSWR, 1.3:1 typ.
- excellent power handling, 1.5W
- small size
- aqueous washable

Applications

- WIMAX
- WIMAX local oscillator




Electrical Specifications

FREQ. RANGE (MHz)	ISOLATION (dB)		INSERTION LOSS (dB) ABOVE 3.0 dB		PHASE UNBALANCE (Degrees)	AMPLITUDE UNBALANCE (dB)	VSWR (:1)	
	Typ.	Min.	Typ.	Max.			S-Port Typ.	Output Ports Typ.
2700-4000	18	10	0.75	1.4	8	0.3	1.5	1.3

Typical Performance Data

Frequency (MHz)	Total Loss ¹ (dB)		Amplitude Unbalance (dB)	Isolation (dB)	Phase Unbalance (deg.)	VSWR S	VSWR 1	VSWR 2
	S-1	S-2						
2625.00	3.46	3.42	0.03	11.91	0.85	1.37	1.26	1.27
2750.00	3.45	3.41	0.04	13.55	0.95	1.33	1.18	1.20
2875.00	3.44	3.40	0.04	15.61	0.96	1.28	1.11	1.12
3000.00	3.43	3.39	0.03	18.28	0.93	1.26	1.06	1.06
3100.00	3.43	3.40	0.02	21.21	1.01	1.25	1.04	1.02
3200.00	3.45	3.41	0.04	25.31	1.07	1.26	1.09	1.07
3300.00	3.48	3.43	0.05	30.74	1.11	1.28	1.15	1.13
3400.00	3.52	3.45	0.06	29.40	1.11	1.31	1.23	1.20
3500.00	3.57	3.50	0.07	24.32	1.15	1.38	1.29	1.27
3600.00	3.63	3.55	0.08	20.79	1.26	1.47	1.36	1.35
3700.00	3.71	3.62	0.10	18.28	1.33	1.56	1.46	1.43
3800.00	3.82	3.70	0.12	16.33	1.25	1.67	1.56	1.51
3900.00	3.94	3.80	0.14	14.76	1.12	1.80	1.63	1.61
3950.00	4.00	3.86	0.13	14.06	0.97	1.87	1.67	1.65
4000.00	4.10	3.98	0.13	13.43	0.99	1.99	1.72	1.72

1. Total Loss = Insertion Loss + 3dB splitter loss.

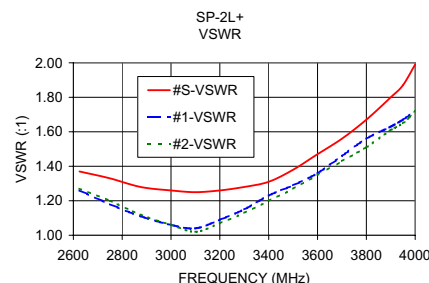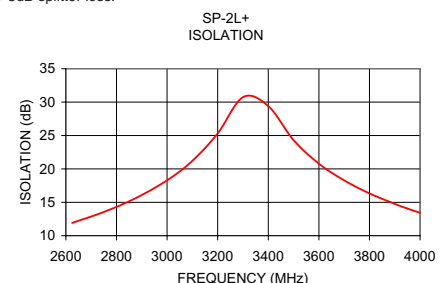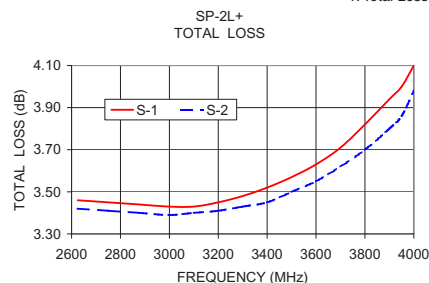

electrical schematic



www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. B
M151107
ED-12593/3/4
SP-2L+
RS/LC/CP/AM
151005