

Low Pass Filter

50Ω DC to 1000 MHz


Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power Input	0.5W Max.
Permanent damage may occur if any of these limits are exceeded.	

Pin Connections

INPUT	1
OUTPUT	8
GROUND	2, 3, 4, 5, 6, 7

Outline Drawing




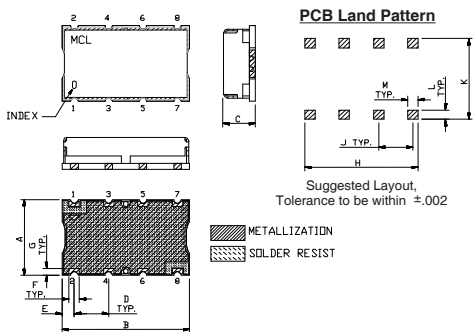


Outline Dimensions (inch mm)

A	B	C	D	E	F	
.44	.74	.27	.200	.07	.060	
11.18	18.80	6.86	5.08	1.78	1.52	
G	H	J	K	L	M	wt.
.040	.660	.200	.470	.055	.060	grams
1.02	16.76	5.08	11.94	1.40	1.52	3.0

Demo Board MCL P/N: TB-368

Suggested PCB Layout (PL-230)

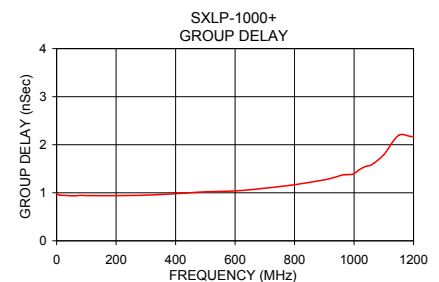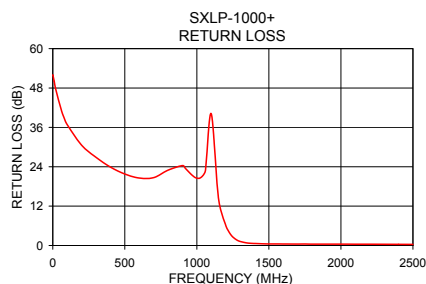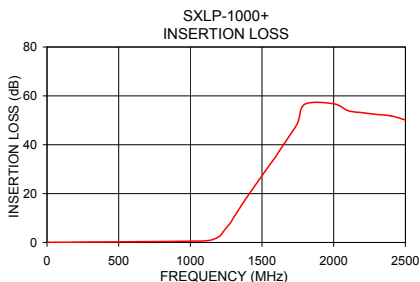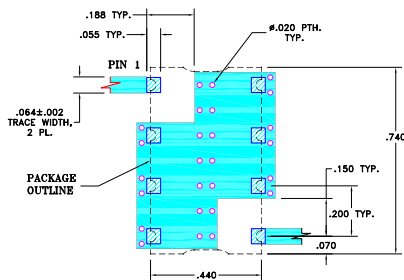

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
 B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
 C. The parts covered by this specification document are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/MCLStore/terms.jsp




www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

Features

- high rejection
- sharp cut-off
- shielded package
- aqueous washable
- low cost

Applications

- defense communications
- receivers / transmitters
- harmonic rejection



CASE STYLE: HF1139


+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications


Low Pass Filter Electrical Specifications (T_{AMB} = 25°C)

PASSBAND (MHz)	f _{co} , MHz Nom.	STOPBAND (MHz)		VSWR (:1)	
		(Loss > 1dB)	(Loss > 3dB)	(Loss > 20dB)	(Loss > 40dB)
DC - 1000	1200	1620 - 2100	2100 - 2500	1.7	18

Typical Frequency Response



Functional Schematic



Typical Performance Data at 25°C

Frequency (MHz)	Insertion Loss (dB)	Return Loss (dB)	Frequency (MHz)	Group Delay (nSec)
$\bar{x}$	σ			
1.0	0.02	0.00	1.0	0.98
60.0	0.06	0.01	20.0	0.95
200.0	0.14	0.00	60.0	0.94
500.0	0.27	0.00	80.0	0.95
800.0	0.39	0.01	100.0	0.94
1000.0	0.55	0.02	200.0	0.94
1150.0	0.83	0.14	300.0	0.95
1200.0	1.67	0.43	400.0	0.98
1240.0	3.87	0.83	500.0	1.02
1280.0	6.44	1.00	600.0	1.04
1350.0	12.86	1.10	700.0	1.09
1400.0	17.21	1.11	800.0	1.17
1500.0	25.53	1.12	900.0	1.27
1620.0	35.31	1.27	920.0	1.30
1750.0	46.05	1.83	940.0	1.33
1800.0	52.31	2.67	960.0	1.37
2000.0	58.20	1.39	980.0	1.38
2100.0	55.05	1.00	1000.0	1.40
2300.0	52.86	0.67	1100.0	1.79
2500.0	50.63	0.42	1200.0	2.18