

# P2-21-411

## 2-WAY SMA POWER DIVIDER

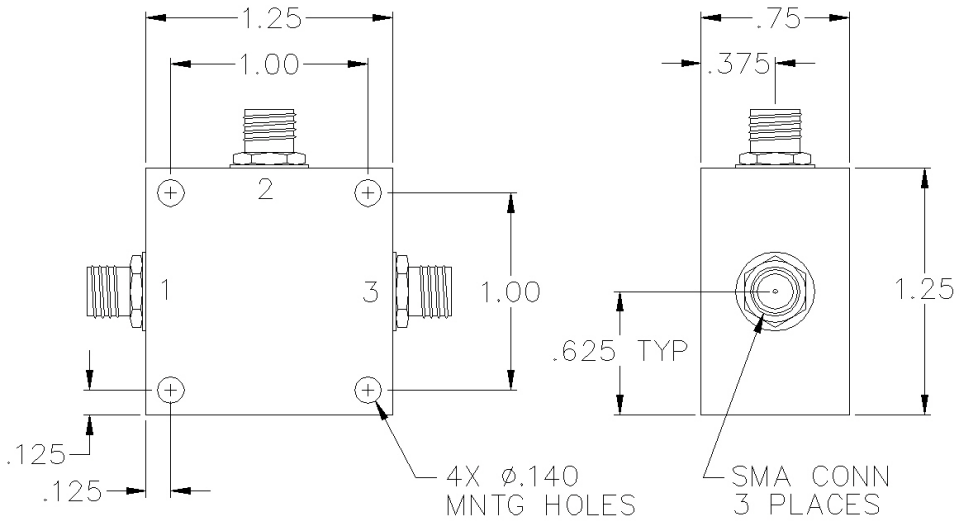


## SPECIFICATIONS

| | |
|---|---|
| Name: | P2-21-411 |
| Frequency Range: | 5-3000 MHz |
| Insertion Loss: | 2.5 dB max. |
| Isolation: | 15 dB min. |
| Amplitude Balance: | 0.5 dB max. |
| Phase Balance: | 6° max. |
| VSWR: | 1.60:1 max. |
| Input Power: | 1 watts max. |
| Package Type: | SMA |

## PORT CONFIGURATION

| | |
|---|---|
| Input: | 2 |
| Output: | 1, 3 |

Input power is specified for load VSWR better than 1.20:1.
SMA female connectors standard, also available with BNC, TNC, F, and N connectors.
75 Ohm and higher power models available, contact sales.

Dimensions are in inches. Decimal tolerance: 2 Place: ± .02, 3 Place: ± .010
All specifications are subject to change without notice at any time. Rev: 190404

PULSAR MICROWAVE CORPORATION
www.pulsarmicrowave.com · 48 Industrial St West, Clifton NJ 07012 · Tel: 973-779-6262 · Fax: 973-779-2727 · sales@pulsarmicrowave.com