
# P2-15-A

## 2-WAY SURFACE MOUNT POWER DIVIDER

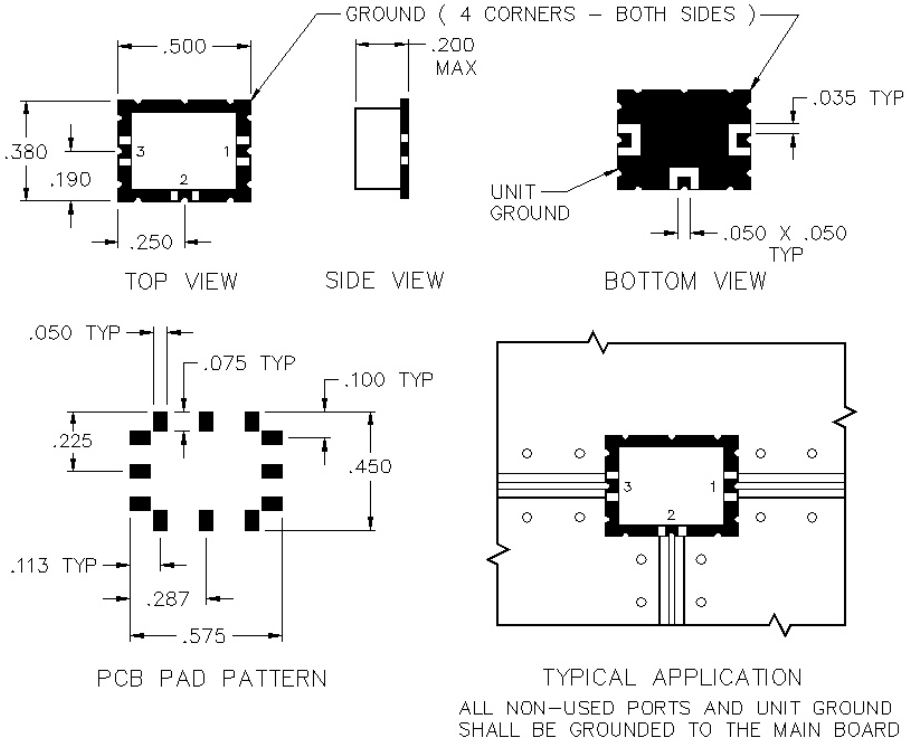


## SPECIFICATIONS

| | |
|---|---|
| Name: | P2-15-A |
| Frequency Range: | 5-2000 MHz |
| Insertion Loss: | 1.8 dB max. |
| Isolation: | 20 dB min. |
| Amplitude Balance: | 0.4 dB max. |
| Phase Balance: | 6° max. |
| VSWR: | 1.60:1 max. |
| Input Power: | 1 watts max. |
| Package Type: | Surface |

Input power is specified for load VSWR better than 1.20:1.
75 Ohm and higher power models available, contact sales.

## PORT CONFIGURATION

| | |
|---|---|
| Input: | 2 |
| Output: | 1, 3 |
| Ground: | 4 Corners |

Dimensions are in inches. Decimal tolerance: 2 Place: ± .02, 3 Place: ± .010
All specifications are subject to change without notice at any time. Rev: 190326

www.pulsarmicrowave.com · 48 Industrial St West, Clifton NJ 07012 · Tel: 973-779-6262 · Fax: 973-779-2727 · sales@pulsarmicrowave.com