

# P2-17-301

## 2-WAY FLATPACK POWER DIVIDER

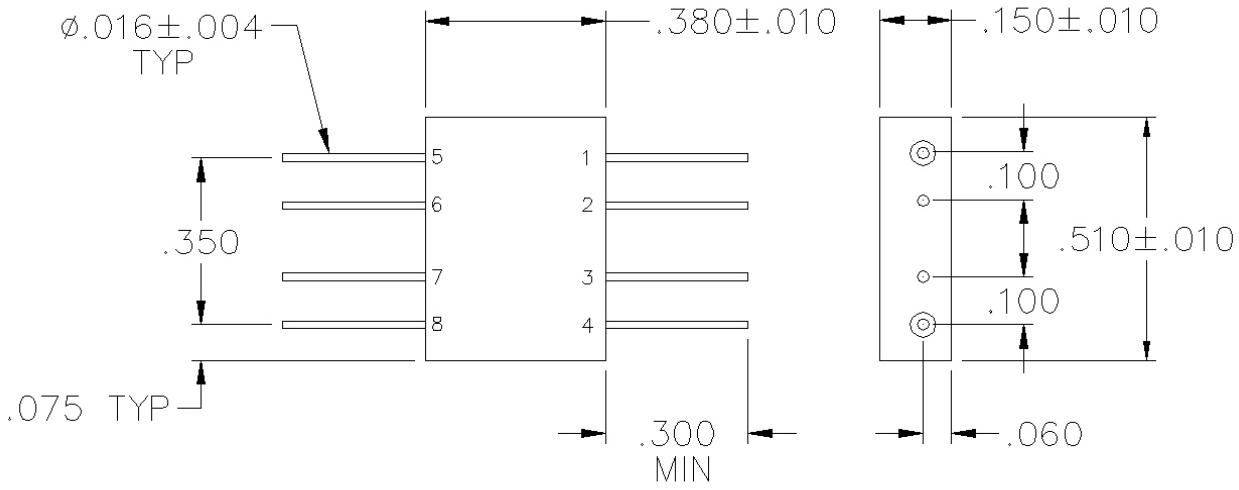


## SPECIFICATIONS

| | |
|---|---|
| Name: | P2-17-301 |
| Frequency Range: | 200-2000 MHz |
| Insertion Loss: | 1.4 dB max. |
| Isolation: | 22 dB min. |
| Amplitude Balance: | 0.4 dB max. |
| Phase Balance: | 6° max. |
| VSWR: | 1.60:1 max. |
| Input Power: | 1 watts max. |
| Package Type: | Pin |

Input power is specified for load VSWR better than 1.20:1.
75 Ohm and higher power models available, contact sales.

## PORT CONFIGURATION

| | |
|---|---|
| Input: | 8 |
| Output: | 5, 1 |
| Ground: | 2-4, 6-7 |

Dimensions are in inches. Decimal tolerance: 2 Place: ± .02, 3 Place: ± .010
All specifications are subject to change without notice at any time. Rev: 190403

PULSAR MICROWAVE CORPORATION
www.pulsarmicrowave.com · 48 Industrial St West, Clifton NJ 07012 · Tel: 973-779-6262 · Fax: 973-779-2727 · sales@pulsarmicrowave.com