

Surface Mount RF Transformer

50Ω

10 to 3000 MHz

TCM2-33WX+



CASE STYLE: DB1627

Maximum Ratings


Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power	0.4W
DC Current	30mA

Permanent damage may occur if any of these limits are exceeded.


Pin Connections

PRIMARY DOT	6
PRIMARY	2
SECONDARY DOT	4
SECONDARY	3
GND	2,5
NOT USED	1

Outline Drawing

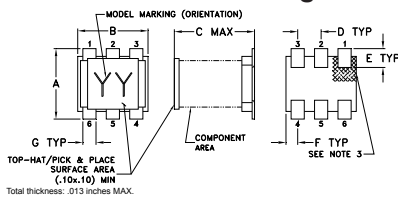


PCB Land Pattern




Outline Dimensions (inches)

A	B	C	D	E	F
.160	.150	.160	.050	.040	.025
4.06	3.81	4.06	1.27	1.02	0.64
G	H	J	K		
.028	.065	.190	.030		
0.71	1.65	4.83	0.76		
				wt	
				grams	
				0.15	

Config. N

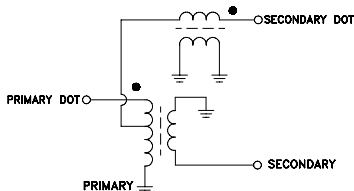

Demo Board MCL P/N: TB-654+
Suggested PCB Layout (PL-364)



- NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .020" ± .0015"; COPPER: 1/2 OZ. ON EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE. DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

Features

- wide bandwidth 10 to 3000 MHz
- balanced transmission line
- excellent return loss
- aqueous washable
- patent pending

Applications

- PCS
- wideband push-pull amplifiers
- cellular

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Available Tape and Reel at no extra cost	
Reel Size	Devices/Reel
7"	20, 50, 100, 200, 500
13"	1000, 2000





Electrical Specifications at 25°C

Parameter	Frequency (MHz)	Min.	Typ.	Max.	Unit
Impedance Ratio (secondary/primary)			2		
Frequency Range		10	—	3000	MHz
Insertion Loss*	10 - 3000	—	1.5	3.0	dB
Amplitude Unbalance	10 - 3000	—	0.7	—	dB
Phase Unbalance	10 - 3000	—	4	—	Degree

*Insertion Loss is reference to mid-band loss, 0.8 dB typ.

Typical Performance Data

FREQUENCY (MHz)	INSERTION LOSS (dB)	INPUT R. LOSS (dB)	AMPLITUDE UNBALANCE (dB)	PHASE UNBALANCE (deg.)
10	0.87	21.66	0.03	0.01
100	0.78	28.58	0.03	0.04
400	0.95	21.26	0.05	0.82
700	1.12	18.13	0.12	0.83
1000	1.30	16.31	0.26	0.62
1600	1.72	14.75	0.74	1.70
2000	2.01	14.79	0.90	2.62
2500	2.46	15.01	0.79	1.26
2800	2.74	14.33	0.64	0.80
3000	2.93	13.77	0.54	1.09

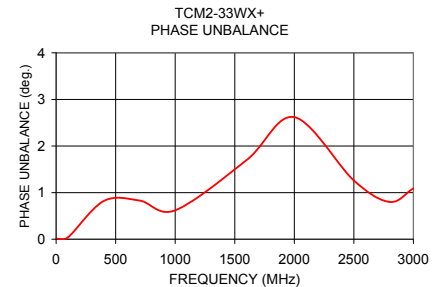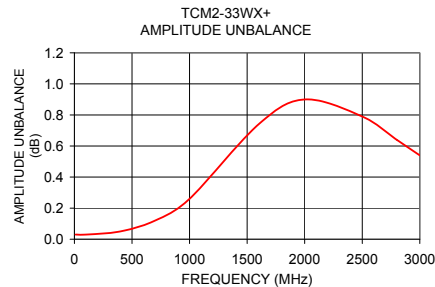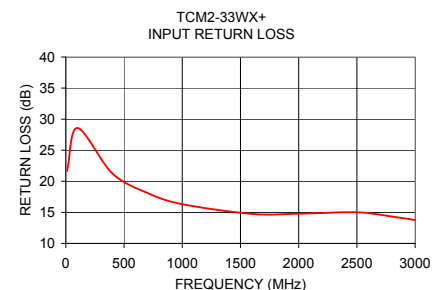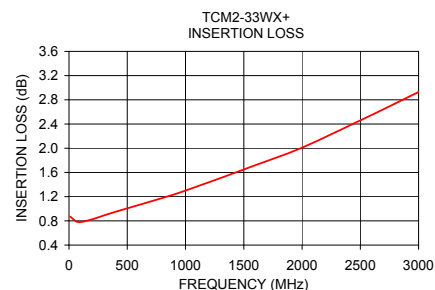

Mini-Circuits®

www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. A
M151107
TCM2-33WX+
ED-14492/8
IG/TD/CP/AM
151012
Page 1 of 1