
P3-08-433/8S

3-WAY SMA POWER DIVIDER



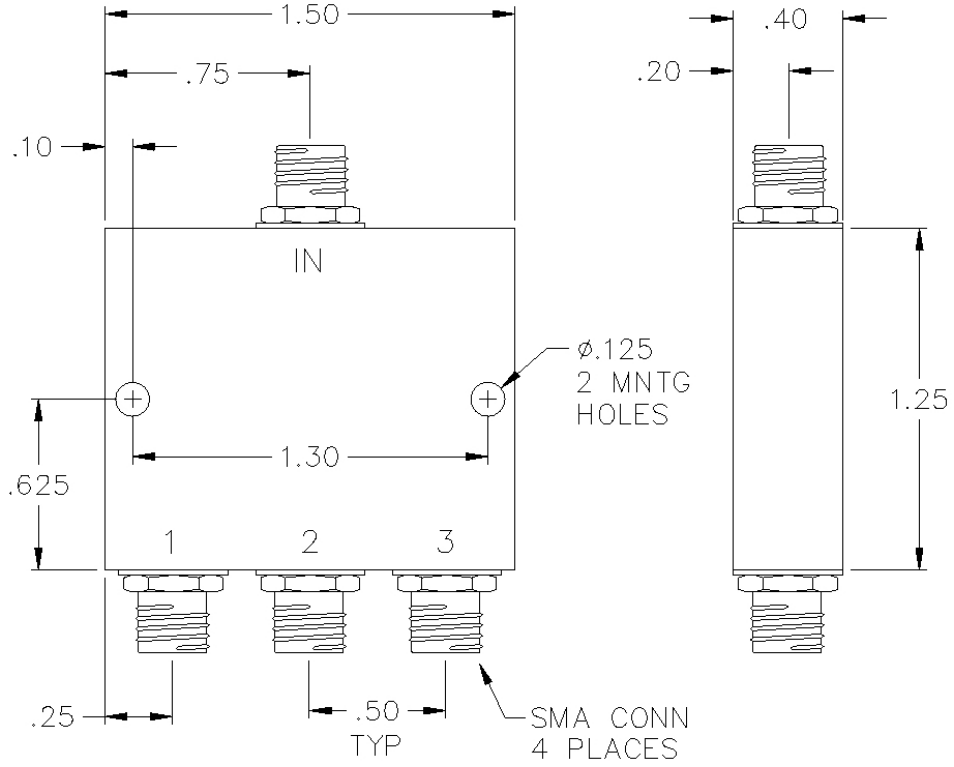

SPECIFICATIONS

Name:	P3-08-433/8S
Frequency Range:	50-1500 MHz
Insertion Loss:	1.5 dB max.
Isolation:	20 dB min.
Amplitude Balance:	0.4 dB max.
Phase Balance:	6° max.
VSWR:	1.60:1 max.
Input Power:	1 watts max.
Package Type:	SMA

PORT CONFIGURATION

Input:	1
Output:	2, 3, 4
Ground:	Housing

Input power is specified for load VSWR better than 1.20:1.
75 Ohm and higher power models available, contact sales.
BNC, TNC, and F connectors and other frequency ranges also available, contact sales.

Dimensions are in inches. Decimal tolerance: 2 Place: ± .02, 3 Place: ± .010
All specifications are subject to change without notice at any time. Rev: 170828

PULSAR MICROWAVE CORPORATION
www.pulsarmicrowave.com · 48 Industrial St West, Clifton NJ 07012 · Tel: 973-779-6262 · Fax: 973-779-2727 · sales@pulsarmicrowave.com