

8 Way-0° 75Ω 5 to 1000 MHz

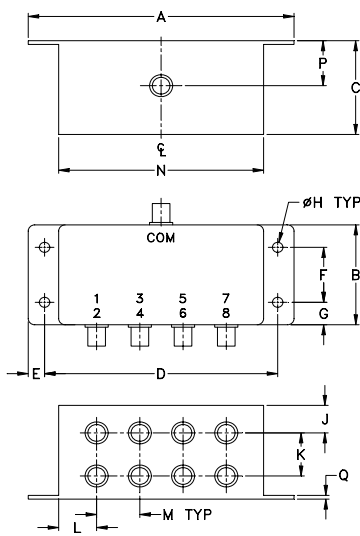
Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	1W max.
Internal Dissipation	0.62W max.
Permanent damage may occur if any of these limits are exceeded.	

Coaxial Connections

SUM PORT	S(COM)
PORT 1,2,3,4,5,6,7,8	1,2,3,4,5,6,7,8

Outline Drawing



Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H
4.06	1.60	1.57	3.56	.24	.88	.36	.160
103.12	40.64	39.88	90.42	6.10	22.35	9.14	4.06
J	K	L	M	N	P	Q	wt.
.43	.69	.58	.66	3.13	.79	.13	grams
10.92	17.53	14.73	16.76	79.50	20.07	3.30	200

Features

- wideband, 5 to 1000 MHz
- low insertion loss, 0.6 dB typ.
- good isolation, 25 dB typ.
- rugged shielded case

Applications

- VHF/UHF
- cellular
- CATV
- communication systems



CASE STYLE: R29

Connectors Model
BNC ZFSC-8-4-75+

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Electrical Specifications

FREQ. RANGE (MHz)	ISOLATION (dB)						INSERTION LOSS (dB) ABOVE 9.0 dB						PHASE UNBALANCE (Degrees)			AMPLITUDE UNBALANCE (dB)		
	L		M		U		L		M		U		L		M		U	
	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Max.	Typ.	Max.	Typ.	Max.	Max.	Max.	Max.	Max.	Max.	Max.
f_L - f_U																		
5-1000	35	20	25	16	20	15	0.4	1.0	0.6	1.6	1.6	2.7	2.0	7.0	13	0.3	0.5	1.2




L = low range [f_L to $10 f_L$] M = mid range [$10 f_L$ to $f_U/2$] U = upper range [$f_U/2$ to f_U]

Typical Performance Data


Freq. (MHz)	Total Loss ¹ (dB)						Amplitude Unbalance (dB)	Isolation (dB)				VSWR		
	S-1	S-2	S-3	S-4	S-6	S-8		1-2	1-7	3-4	5-7	S	1	8
5.00	9.33	9.33	9.41	9.33	9.33	9.40	0.09	34.01	37.83	49.28	52.87	1.98	1.24	1.24
13.00	9.33	9.33	9.40	9.33	9.33	9.39	0.08	34.62	39.35	52.07	53.37	1.94	1.21	1.22
35.00	9.41	9.40	9.45	9.41	9.41	9.43	0.05	34.58	38.92	48.20	49.83	1.70	1.22	1.22
50.00	9.44	9.42	9.46	9.43	9.44	9.44	0.04	34.34	38.52	45.84	47.34	1.57	1.22	1.22
140.00	9.53	9.53	9.53	9.54	9.54	9.51	0.03	32.07	37.60	38.67	39.66	1.23	1.21	1.22
230.00	9.60	9.60	9.59	9.60	9.61	9.57	0.03	29.78	37.19	35.69	36.64	1.13	1.19	1.20
320.00	9.62	9.63	9.62	9.64	9.64	9.61	0.05	27.89	36.88	34.40	35.34	1.09	1.17	1.18
410.00	9.65	9.66	9.65	9.68	9.69	9.66	0.07	26.35	36.40	34.04	34.98	1.10	1.15	1.17
500.00	9.73	9.75	9.73	9.77	9.79	9.75	0.11	25.17	35.55	34.72	35.43	1.16	1.15	1.17
640.00	9.89	9.94	9.91	9.97	10.00	9.95	0.19	24.02	33.55	38.85	39.00	1.24	1.18	1.21
780.00	10.08	10.15	10.11	10.21	10.25	10.16	0.28	23.49	31.29	36.88	39.95	1.29	1.23	1.25
880.00	10.25	10.35	10.29	10.42	10.49	10.37	0.37	22.89	30.19	31.35	34.36	1.26	1.24	1.27
940.00	10.37	10.48	10.41	10.55	10.63	10.52	0.42	22.21	29.74	29.21	32.21	1.23	1.24	1.28
970.00	10.42	10.54	10.45	10.61	10.71	10.60	0.44	21.78	29.54	28.36	31.31	1.22	1.24	1.28
1000.00	10.51	10.63	10.55	10.71	10.83	10.71	0.49	21.33	29.44	27.66	30.65	1.23	1.24	1.28

ZFSC-8-4-75+
TOTAL LOSS

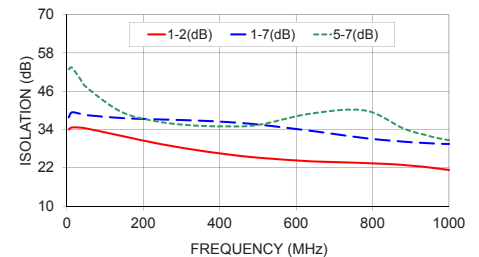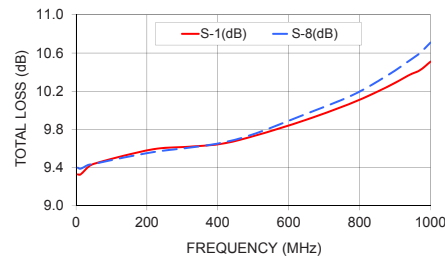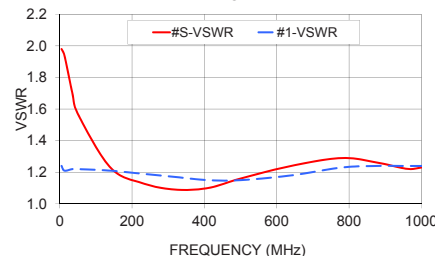1. Total Loss = Insertion Loss + 9dB splitter loss.

ZFSC-8-4-75+
ISOLATIONZFSC-8-4-75+
VSWR

electrical schematic



Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
 B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
 C. The parts covered by this specification document are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/MCLStore/terms.jsp

