

12 Way-0° 50Ω 1 to 200 MHz

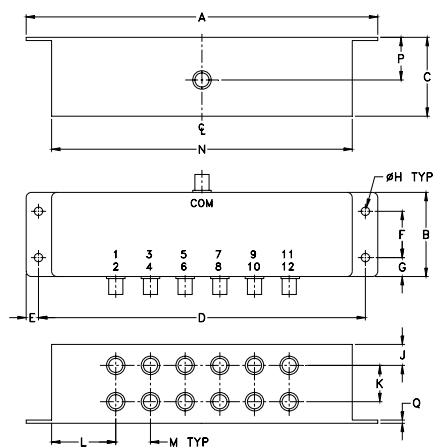
Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	1W max.
Internal Dissipation	0.87W max.
Permanent damage may occur if any of these limits are exceeded.	

Coaxial Connections

SUM PORT	S(COM)
PORT 1,2,3,.....,12	1,2,3,.....,12

Outline Drawing



Outline Dimensions (inch mm)

A	B	C	D	E	F	G	H
6.69	1.60	1.50	6.22	.24	.88	.36	.160
169.93	40.64	38.10	157.99	6.10	22.35	9.14	4.06
J	K	L	M	N	P	Q	wt.
.40	.69	1.22	.66	5.72	.81	.06	grams
10.16	17.53	30.99	16.76	145.29	20.57	1.52	310.0

Features

- high isolation, 35 dB typ.
- excellent amplitude unbalance, 0.2 dB typ.
- rugged shielded case

Applications

- HF/VHF
- instrumentation
- communication systems



BNC version shown
CASE STYLE: R67

Connectors	Model
BNC	ZFSC-12-1+
SMA	ZFSC-12-1-S+

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

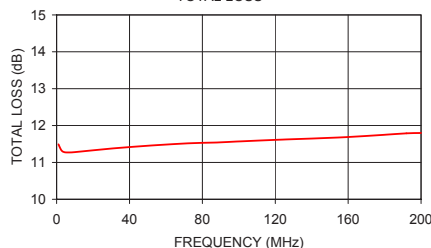
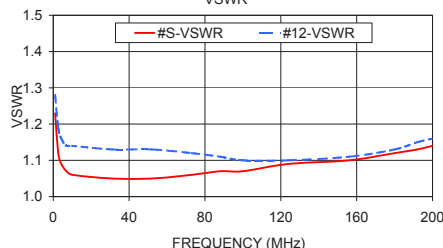
Electrical Specifications

FREQ. RANGE (MHz)	ISOLATION (dB)						INSERTION LOSS (dB) ABOVE 10.8 dB						PHASE UNBALANCE (Degrees)			AMPLITUDE UNBALANCE (dB)		
	L		M		U		L		M		U		L		M		U	
f_L - f_U	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Max.	Typ.	Max.	Typ.	Max.	Max.	Max.	Max.	Max.	Max.	Max.
1-200	30	25	35	20	28	20	0.8	1.2	1.1	1.4	1.3	1.6	4	8	16	0.3	0.2	0.3

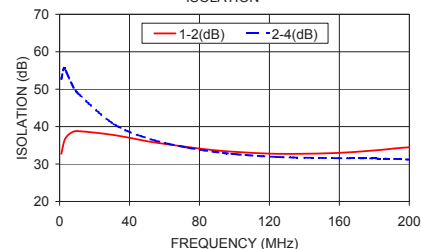
L = low range [f_L to 10 f_L] M = mid range [10 f_L to $f_U/2$] U = upper range [$f_U/2$ to f_U]

Typical Performance Data

Freq. (MHz)	Total Loss ¹ (dB)	Amplitude Unbalance (dB)	Isolation (dB)		Phase Unbalance (deg.)	VSWR S	VSWR 12
			1-3	2-4			
1.00	11.49	0.03	32.74	52.71	0.08	1.23	1.28
2.60	11.33	0.02	36.03	55.64	0.08	1.12	1.19
4.20	11.28	0.01	37.46	54.20	0.07	1.09	1.16
7.00	11.27	0.01	38.46	51.38	0.06	1.07	1.14
10.00	11.28	0.01	38.83	49.13	0.09	1.06	1.14
31.00	11.38	0.01	37.76	40.69	0.34	1.05	1.13
52.00	11.46	0.02	35.95	36.66	0.59	1.05	1.13
73.00	11.52	0.03	34.57	34.40	0.82	1.06	1.12
88.00	11.54	0.04	33.72	33.29	0.97	1.07	1.11
100.00	11.57	0.06	33.27	32.66	1.14	1.07	1.10
124.00	11.62	0.08	32.73	31.90	1.42	1.09	1.10
156.00	11.68	0.13	32.91	31.60	1.87	1.10	1.11
180.00	11.75	0.18	33.65	31.49	2.23	1.12	1.13
192.00	11.79	0.21	34.19	31.36	2.43	1.13	1.15
200.00	11.80	0.22	34.48	31.18	2.59	1.14	1.16

ZFSC-12-1
TOTAL LOSSZFSC-12-1
VSWR

1. Total Loss = Insertion Loss + 10.8dB splitter loss.

ZFSC-12-1
ISOLATION

electrical schematic



Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

