

# Surface Mount RF Transformer

50Ω

40 to 300 MHz

TX16-R3T+



CASE STYLE: TT240

## Maximum Ratings

Operating Temperature	-20°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power	250mW
DC Current	30mA

Permanent damage may occur if any of these limits are exceeded.

## Pin Connections

PRIMARY DOT	4
PRIMARY	6
SECONDARY DOT	3
SECONDARY	1
SECONDARY CT	2
NOT USED	5

## Features


- wideband, 40 to 300 MHz
- high impedance ratio 16:1
- leadless surface mount

## Applications

- impedance matching of amplifiers
- push-pull amplifiers
- VHF/UHF receivers/transmitters

**+RoHS Compliant**  
The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications


## Outline Drawing

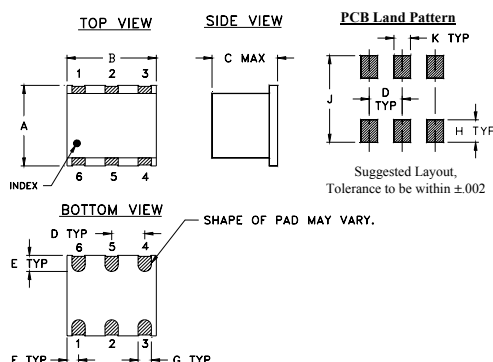

## Outline Dimensions (inch/mm)

A	B	C	D	E	F
.250	.31	.20	.100	.050	.055
6.35	7.87	5.08	2.54	1.27	1.40
G	H	J	K	wt	
.040	.070	.270	.050	grams	
1.02	1.78	6.86	1.27	0.50	

## Config. A




## Transformer Electrical Specifications

Ω RATIO	FREQUENCY (MHz)	INSERTION LOSS*		
		3 dB MHz	2 dB MHz	1 dB MHz
16	40-300	40-300	60-220	70-150

\* Insertion Loss is referenced to mid-band loss, 0.8 dB typ.

## Typical Performance Data

FREQUENCY (MHz)	INSERTION LOSS (dB)	INPUT R. LOSS (dB)
40.00	0.78	10.69
45.00	0.81	12.21
60.00	0.91	15.24
65.00	0.94	15.89
70.00	0.96	16.23
110.00	1.13	12.90
150.00	1.44	9.60
185.00	1.58	7.74
220.00	2.00	6.29
300.00	2.74	4.30

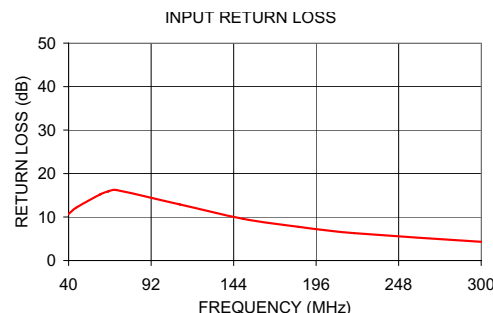

## Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)



[www.minicircuits.com](http://www.minicircuits.com) P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. B  
M151107  
TX16-R3T+  
IG/TD/CP/AM  
151008  
Page 1 of 1