


# P6-02-302

## 6-WAY FLATPACK POWER DIVIDER

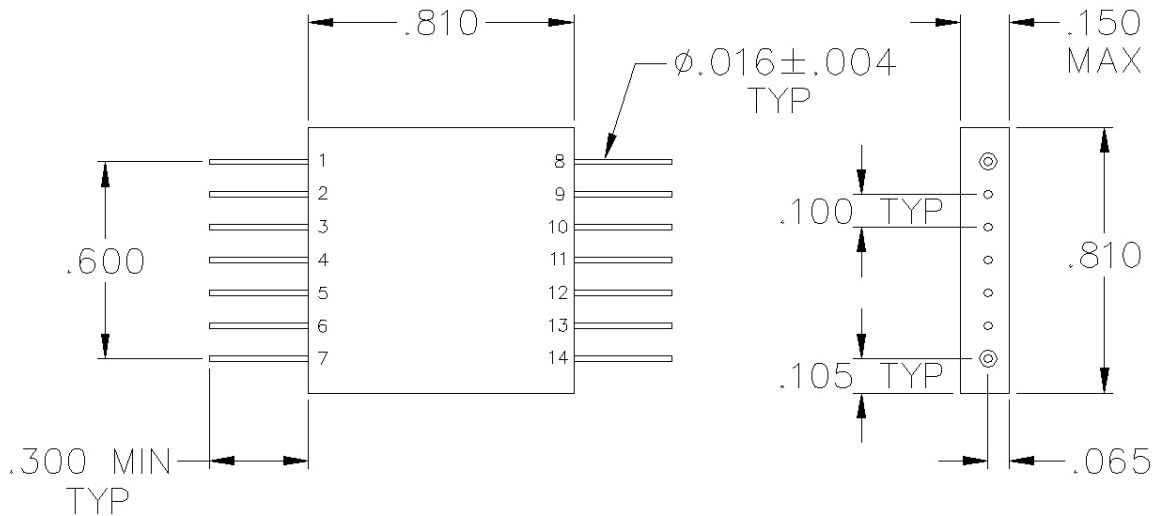

### SPECIFICATIONS

|                    |              |
|--------------------|--------------|
| Name:              | P6-02-302    |
| Frequency Range:   | 10-500 MHz   |
| Insertion Loss:    | 2.0 dB max.  |
| Isolation:         | 22 dB min.   |
| Amplitude Balance: | 0.4 dB max.  |
| Phase Balance:     | 5° max.      |
| VSWR:              | 1.50:1 max.  |
| Input Power:       | 1 watts max. |
| Package Type:      | Pin          |

### PORT CONFIGURATION

|         |              |
|---------|--------------|
| Input:  | 4            |
| Output: | 8-10, 12-14  |
| Ground: | 1-3, 5-7, 11 |

Input power is specified for load VSWR better than 1.20:1.  
75 Ohm and higher power models available, contact sales.