


P6-05-F

6-WAY SURFACE MOUNT POWER DIVIDER

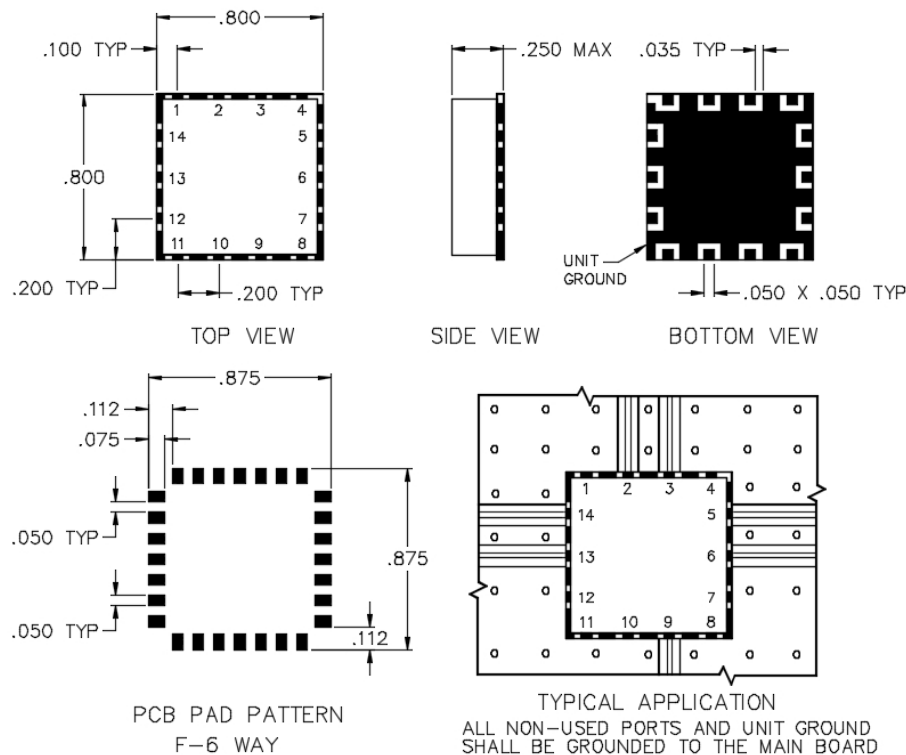

SPECIFICATIONS

Name:	P6-05-F
Frequency Range:	20-1350 MHz
Insertion Loss:	3.0 dB max.
Isolation:	15 dB min.
Amplitude Balance:	0.5 dB max.
Phase Balance:	12° max.
VSWR:	1.50:1 max.
Input Power:	1 watts max.
Package Type:	Surface

Input power is specified for load VSWR better than 1.20:1.
75 Ohm and higher power models available, contact sales.

PORT CONFIGURATION

Input:	9
Output:	2, 3, 5, 6, 13, 14
Ground:	1, 4, 7-12