


# RP2-05-411

## 2-WAY SMA RESISTIVE POWER DIVIDER

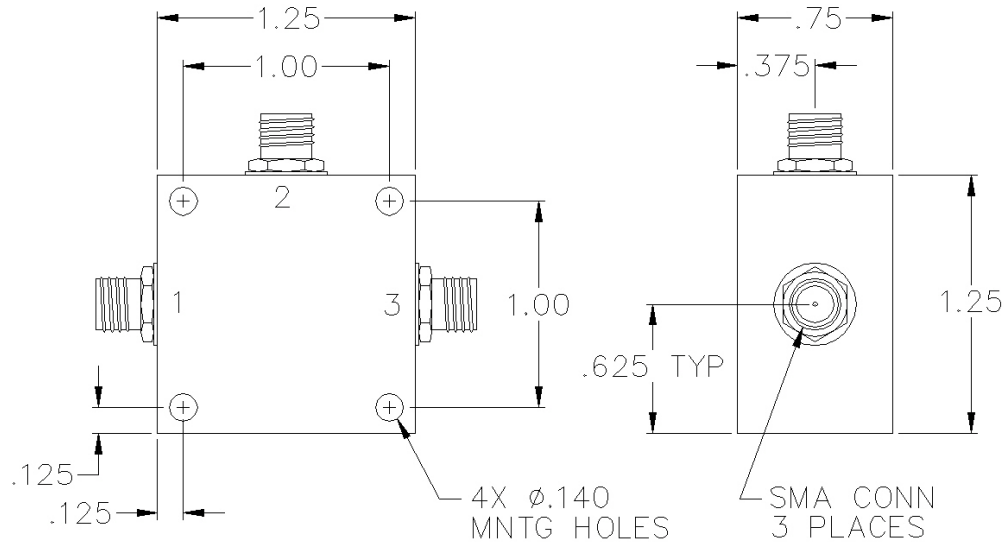

### SPECIFICATIONS

|                    |                |
|--------------------|----------------|
| Name:              | RP2-05-411     |
| Frequency Range:   | DC-4 GHz       |
| Insertion Loss:    | 1.5 dB max.    |
| Amplitude Balance: | 0.5 dB max.    |
| Phase Balance:     | 5° max.        |
| VSWR:              | 1.50:1 max.    |
| Input Power:       | 5.0 watts max. |
| Connector Type:    | SMA            |

Insertion Loss does not include 6 dB theoretical loss.

### PORT CONFIGURATION

|          |      |
|----------|------|
| Input:   | 2    |
| Outputs: | 1, 3 |