


RP2-04-417

2-WAY SMA RESISTIVE POWER DIVIDER

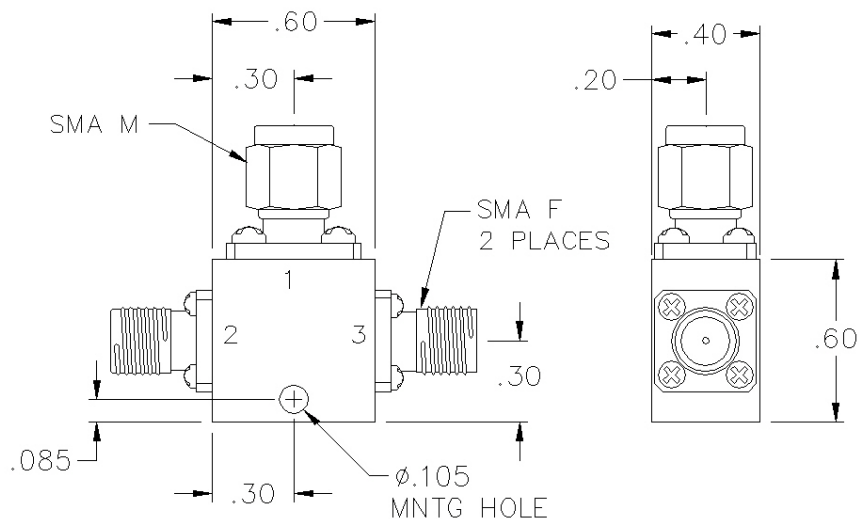

SPECIFICATIONS

Name:	RP2-04-417
Frequency Range:	DC-18 GHz
Insertion Loss:	1.5 dB max.
Amplitude Balance:	0.5 dB max.
Phase Balance:	8° max.
VSWR:	1.50:1 max.
Input Power:	0.5 watts max.
Connector Type:	SMA

Insertion Loss does not include 6 dB theoretical loss.

PORT CONFIGURATION

Input:	1
Outputs:	2, 3

Dimensions are in inches. Decimal tolerance: 2 Place: $\pm .02$, 3 Place: $\pm .010$
All specifications are subject to change without notice at any time. Rev: 170622

www.pulsarmicrowave.com · 48 Industrial St West, Clifton NJ 07012 · Tel: 973-779-6262 · Fax: 973-779-2727 · sales@pulsarmicrowave.com

PULSAR
MICROWAVE CORPORATION