


RP4-03-413

4-WAY SMA RESISTIVE POWER DIVIDER

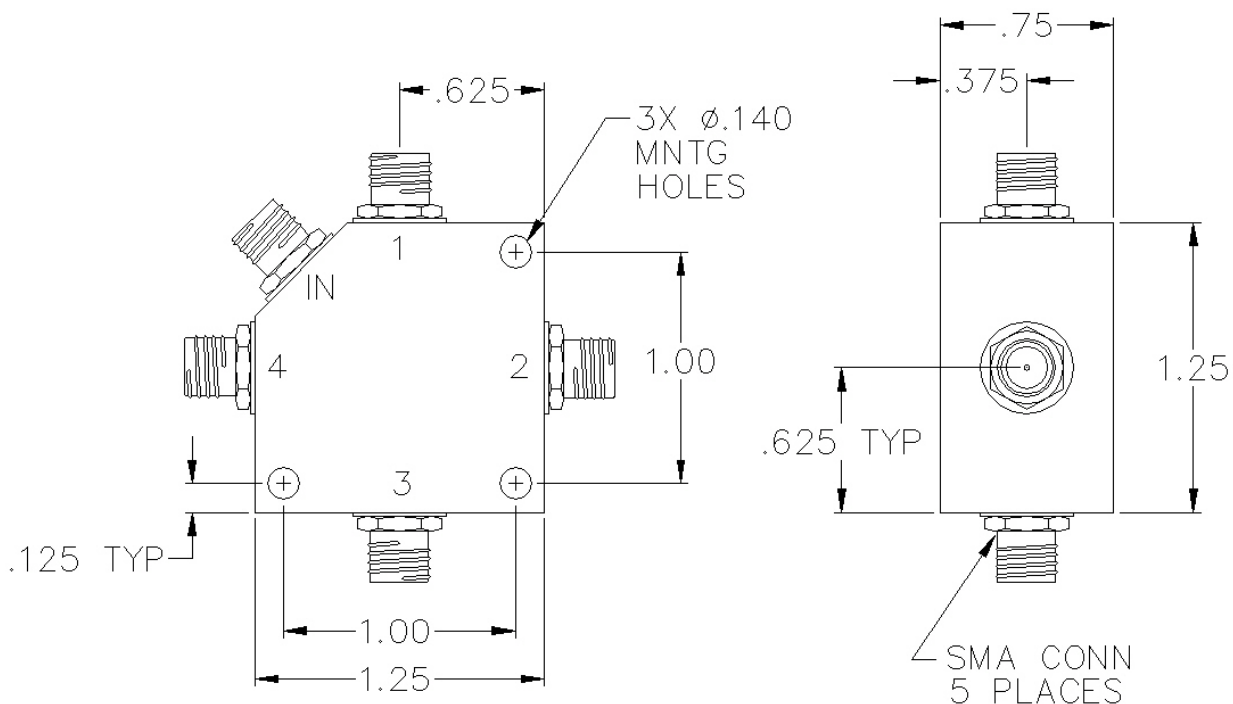

SPECIFICATIONS

Name:	RP4-03-413
Frequency Range:	DC-4 GHz
Insertion Loss:	0.5 dB max.
Amplitude Balance:	0.7 dB max.
Phase Balance:	6° max.
VSWR:	1.50:1 max.
Input Power:	0.5 watts max.
Connector Type:	SMA

Insertion Loss does not include 12 dB theoretical loss.

Dimensions are in inches. Decimal tolerance: 2 Place: $\pm .02$, 3 Place: $\pm .010$
All specifications are subject to change without notice at any time. Rev: 170622

www.pulsarmicrowave.com · 48 Industrial St West, Clifton NJ 07012 · Tel: 973-779-6262 · Fax: 973-779-2727 · sales@pulsarmicrowave.com

PULSAR
MICROWAVE CORPORATION