


PP2-19-450/22N

2-WAY TYPE N HIGH POWER COMBINER

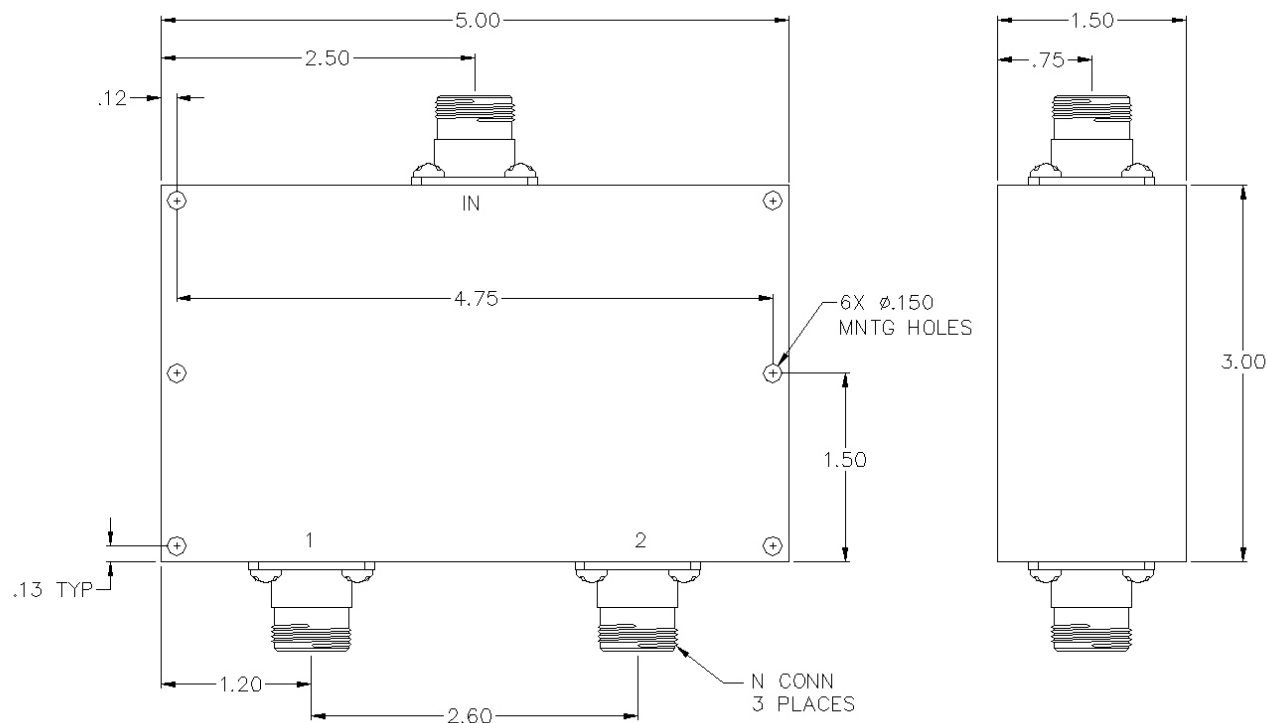

SPECIFICATIONS

Name:	PP2-19-450/22N
Frequency Range:	2-100 MHz
Insertion Loss:	0.3 dB max.
Isolation:	20 dB min.
Max Power at Combined Port:	500 watts
Amplitude Balance:	0.2 dB max.
Phase Balance:	4° max.
VSWR:	1.30:1 max.
Package Type:	N

Also available with SMA connectors, contact sales.

Dimensions are in inches. Decimal tolerance: 2 Place: $\pm .02$, 3 Place: $\pm .010$
All specifications are subject to change without notice at any time. Rev: 190326

www.pulsarmicrowave.com · 48 Industrial St West, Clifton NJ 07012 · Tel: 973-779-6262 · Fax: 973-779-2727 · sales@pulsarmicrowave.com

PULSAR
MICROWAVE CORPORATION