


PP2-14-450/1N

2-WAY TYPE N HIGH POWER COMBINER

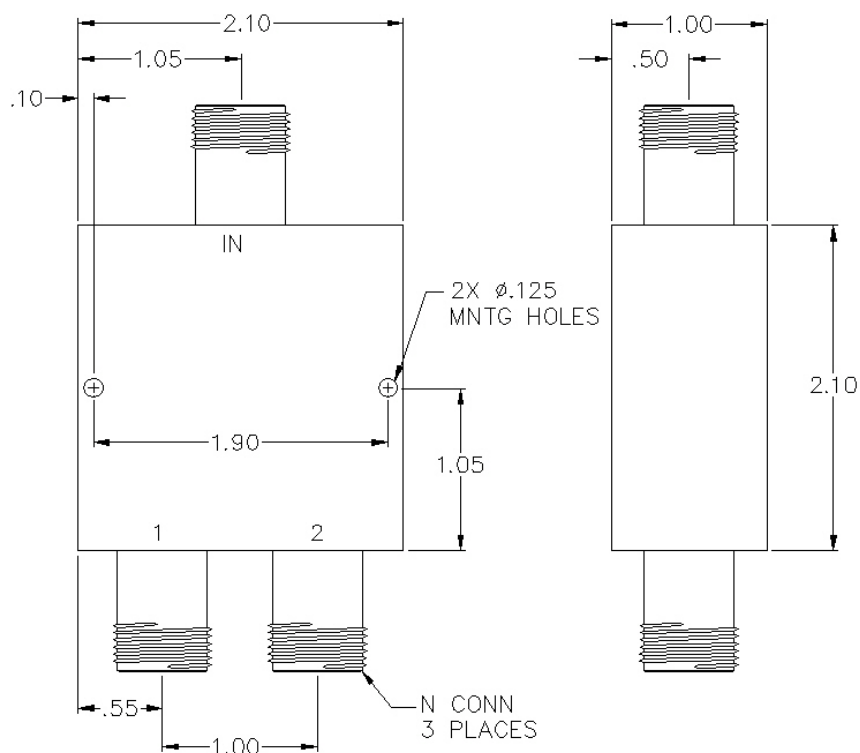

SPECIFICATIONS

Name:	PP2-14-450/1N
Frequency Range:	5-500 MHz
Insertion Loss:	0.8 dB max.
Isolation:	18 dB min.
Max Power at Combined Port:	50 watts
Amplitude Balance:	0.5 dB max.
Phase Balance:	5° max.
VSWR:	1.40:1 max.
Package Type:	N

Also available with SMA connectors, contact sales.

Dimensions are in inches. Decimal tolerance: 2 Place: $\pm .02$, 3 Place: $\pm .010$
All specifications are subject to change without notice at any time. Rev: 190326

www.pulsarmicrowave.com · 48 Industrial St West, Clifton NJ 07012 · Tel: 973-779-6262 · Fax: 973-779-2727 · sales@pulsarmicrowave.com

PULSAR
MICROWAVE CORPORATION