

Frequency Mixer

Level 17 (LO Power+17 dBm) 2800 to 8000 MHz


Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
RF Power	200 mW
IF Current	40 mA
Permanent damage may occur if any of these limits are exceeded	


Pin Connections

LO	10
RF	5
IF	3
GROUND	1,2,4,6,7,8,9

Outline Drawing

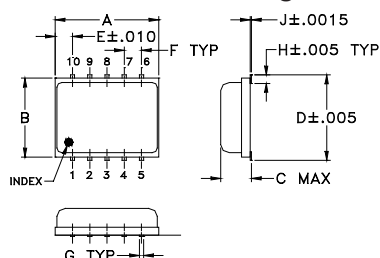

PCB Land Pattern




Suggested Layout,
Tolerance to be within $\pm .002$

Outline Dimensions ($\frac{\text{inch}}{\text{mm}}$)

A	B	C	D	E	F	G
.30	.250	.085	.266	.050	.050	.012
7.62	6.35	2.16	6.76	1.27	1.27	0.30
H	J	K	L	M		wt
.029	.004	.085	.296	.030		grams
0.74	0.10	2.16	7.52	0.76		0.25

Demo Board MCL P/N: TB-144
Suggested PCB Layout (PL-045)

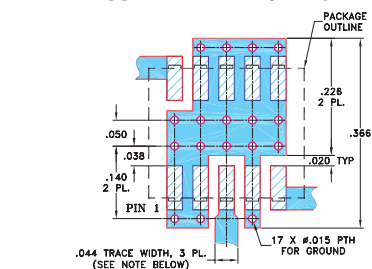

- NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .020" $\pm$.0015"; COPPER: 1/2 OZ. EACH SIDE.
 2. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
 3. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
-  DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
-  DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Features

- wide bandwidth, 2800 to 8000 MHz
- low conversion loss, 6.3 dB typ.
- high L-R isolation, 35 dB typ.
- IF, DC to 1250 MHz
- LTCC double balanced mixer
- aqueous washable
- low cost
- low profile, 0.08"
- protected by US Patent 7,027,795

Applications

- satellite up and down converters
- line of sight links
- defense radar
- defense communication

Electrical Specifications (T_{AMB}=-55°C to 100°C)

FREQUENCY (MHz)		CONVERSION LOSS (dB)			LO-RF ISOLATION (dB)		LO-IF ISOLATION (dB)		IP3 at center band (dBm)
LO/RF f_i-f_o	IF	$\overline{X}$	σ	Max.	Typ.	Min.	Typ.	Min.	Typ.
2800-8000	DC-1250								
2800-5000	DC-1250	6.5	0.2	8.9*	34	22	12	8	24
5000-8000	DC-1250	6.0	0.2	8.9*	35	21	35	13	21


1 dB COMPR., +14 dBm typ.

* Conversion loss at 30 MHz IF, increases with IF frequency.

Typical Performance Data

Frequency (MHz)		Conversion Loss (dB)	Isolation L-R (dB)	Isolation L-I (dB)	VSWR RF Port (:1)	VSWR LO Port (:1)
RF	LO	LO +13dBm	LO +13dBm	LO +13dBm	LO +13dBm	LO +13dBm
2800.00	2830.10	6.32	43.01	12.42	2.41	1.99
5000.00	5030.10	7.02	35.98	24.98	2.67	2.98
6200.00	6230.10	5.89	32.88	37.57	2.97	3.25
6300.00	6330.10	5.62	32.26	38.59	3.20	3.45
6400.00	6430.10	5.42	34.86	39.69	3.42	3.20
6500.00	6530.10	5.18	35.38	41.78	3.13	2.96
6600.00	6630.10	5.28	32.64	45.82	2.98	2.83
6650.00	6680.10	5.56	32.40	45.78	3.06	2.60
6700.00	6730.10	5.13	32.63	44.65	3.30	2.60
7000.00	7030.10	5.25	32.22	45.62	3.13	2.72
7150.00	7180.10	5.61	32.69	45.49	3.45	2.83
7200.00	7230.10	5.46	32.89	43.89	3.67	2.89
7300.00	7330.10	5.55	33.59	41.45	3.62	3.04
7400.00	7430.10	5.65	34.45	40.66	3.45	3.13
7500.00	7530.10	5.79	33.59	41.99	3.45	3.22
7600.00	7630.10	6.08	34.10	41.64	3.86	3.16
7700.00	7730.10	6.18	34.94	34.31	4.74	2.97
7800.00	7830.10	6.31	35.54	30.40	5.09	2.86
7900.00	7930.10	6.25	35.75	27.33	4.68	2.86
8000.00	8030.10	6.30	33.26	24.54	4.50	3.15

Electrical Schematic

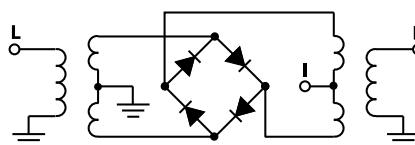

CASE STYLE: DZ885

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Reel Size	Devices/Reel
7"	10, 20, 50, 100, 200
13"	500, 1000

Recommended Replacement:
MAC-80H+

- Footprint Compatible
- MIL Level Reliability



[Click here for data sheet](#)









Notes

- Notes:**
- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
 - B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
 - C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MC/Store/terms.iso



www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. E
M151107
ED-11232/1
MCA1-80H+
DJ/RS/CP/AM
160727
Page 1 of 2

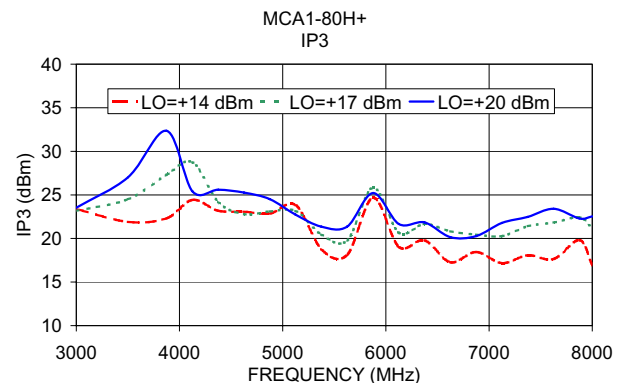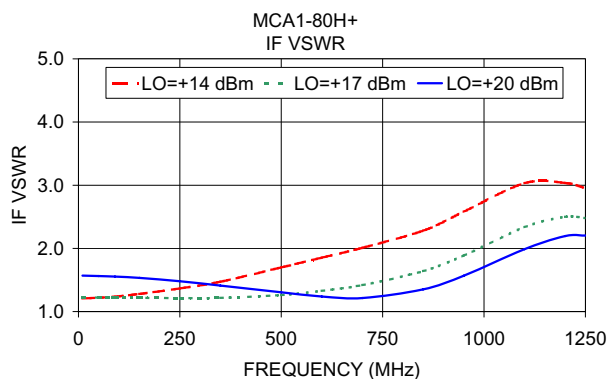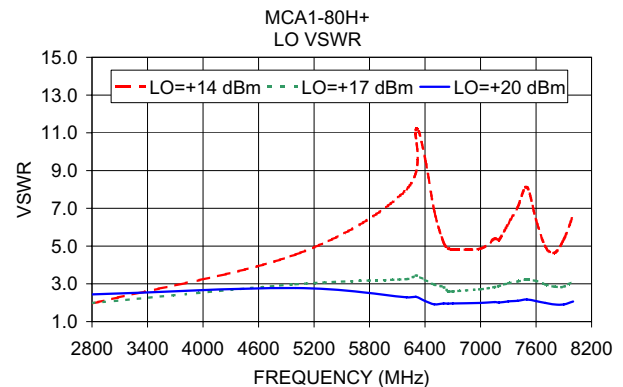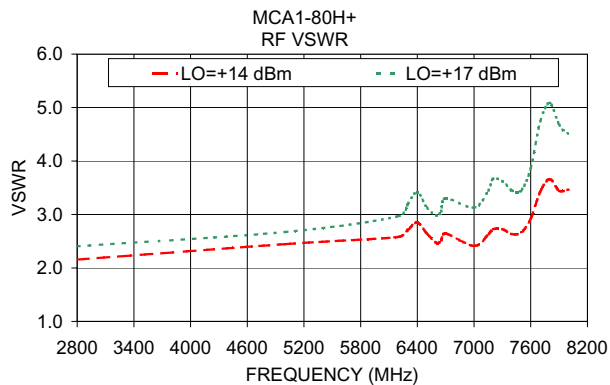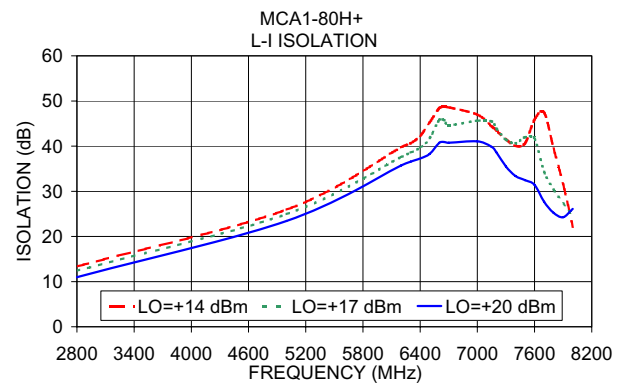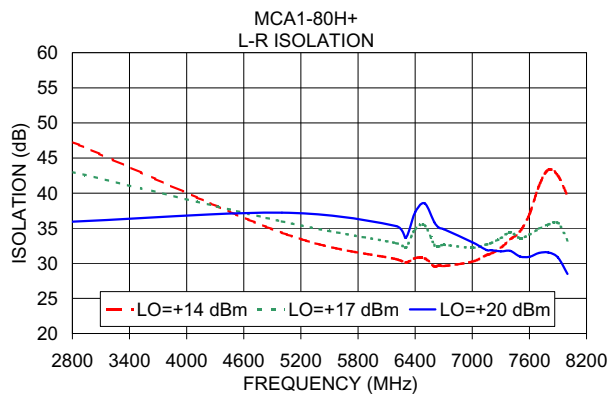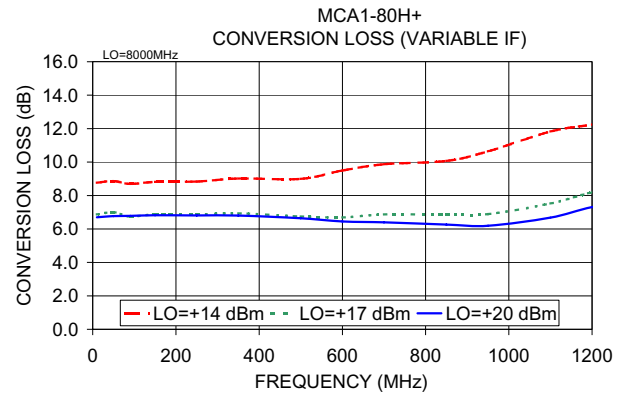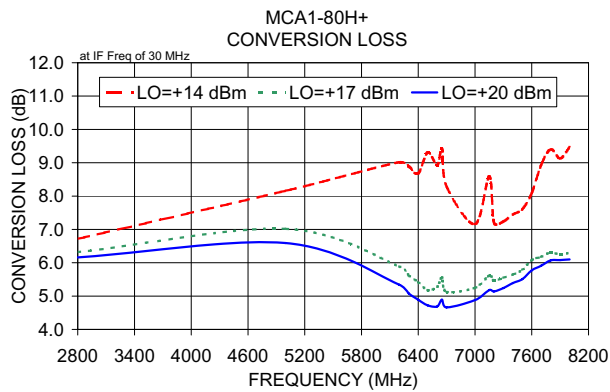

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

