

RF Transformer

50Ω 5600 to 6200 MHz 1:2 Ratio

NCS2-622+



CASE STYLE: GE0805C-1

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications



Available Tape and Reel at no extra cost

Reel Size	Devices/Reel
7"	20, 50, 100, 200, 500, 1000, 2000

Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
Input RF Power	3W
*** Derate linearly to 2W at 85°C	
Permanent damage may occur if any of these limits are exceeded.	

Pad Connections

PRIMARY DOT (Unbalanced Port)	1
PRIMARY (GND)	2
SECONDARY DOT (Balanced)	4
SECONDARY (Balanced)	3
NO CONNECTION	6
NOT USED (GND Externally)	5

Pads 2,3,4 are DC-connected internally

Features

- wideband, 5600 to 6200 MHz
- low phase unbalance, 6 deg. and amplitude unbalance, 0.6 dB typ.
- miniature size, 0.079"x0.049"x0.033"
- LTCC construction
- low cost
- aqueous washable

Applications

- WLAN
- WiMAX
- 802.11
- radar

Electrical Specifications ($T_{AMB}=25^{\circ}\text{C}$)

Ω RATIO (Secondary/Primary)	FREQUENCY (MHz)	INSERTION* LOSS (dB)	PHASE UNBALANCE AT SECONDARY† (Deg.) Typ.	AMPLITUDE UNBALANCE (dB) Typ.
2	5600-6200	1.0	6	0.6

* Insertion Loss is referenced to mid-band loss, 0.75 dB. Reference Demo Board TB-419+


† Relative to 180°

Typical Performance Data at 25°C**

FREQUENCY (MHz)	INSERTION LOSS (dB)	INPUT R. LOSS (dB)	AMPLITUDE UNBALANCE (dB)	PHASE UNBALANCE (Deg.)
5600.00	0.00	23.26	0.37	5.36
5700.00	0.04	20.95	0.30	4.34
5800.00	0.08	18.89	0.24	3.30
5900.00	0.12	17.14	0.20	1.95
5960.00	0.14	16.34	0.25	1.29
5980.00	0.15	16.11	0.24	1.03
6000.00	0.16	15.76	0.23	0.67
6050.00	0.17	15.15	0.29	0.19
6100.00	0.21	14.54	0.31	1.00
6200.00	0.28	13.70	0.47	2.95

** Measured with Agilent E5071B network analyzer using impedance conversion and port extension.


Outline Drawing

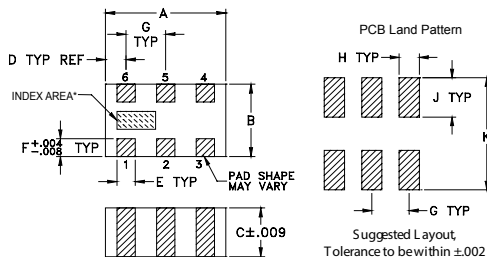

*Shape of index marking may vary

Outline Dimensions (inch/mm)

A	B	C	D	E	F
.079	.049	.033	.014	.012	.012
2.01	1.24	0.84	0.36	0.30	0.30
G	H	J	K	wt	
.026	.014	.039	.110	grams	
0.66	0.36	1.00	2.80	.008	

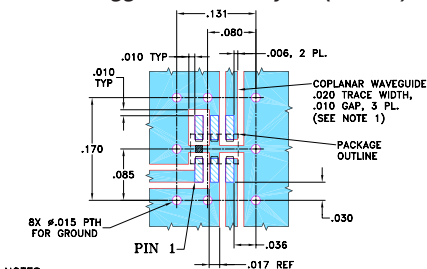Demo Board MCL P/N: TB-NCS2-622+
Suggested PCB Layout (PL-264)

NOTES:

1. COPLANAR WAVEGUIDE PARAMETERS ARE SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .010" ± .001". COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH AND GAP MAY NEED TO BE MODIFIED.
 2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER).
 DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK




Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. D
M172420
NCS2-622+
ED 12817/34B32
RS/AM
190204

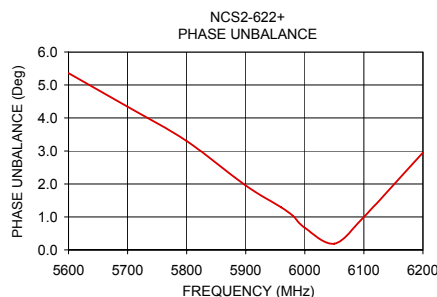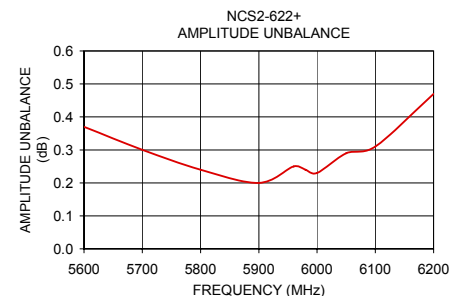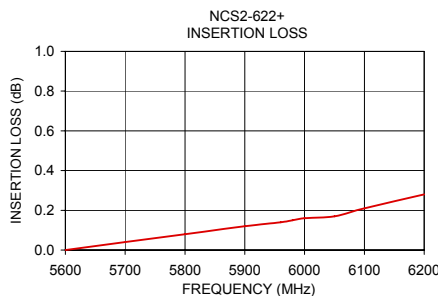

configuration R

