

RF Transformer

50Ω 1600 to 2300 MHz 1:4 Ratio

NCS4-232+



CASE STYLE: GE0805C-1

Maximum Ratings


Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
Input RF Power***	3W
*** Derate linearly to 2W at 85°C	
Permanent damage may occur if any of these limits are exceeded.	

Pad Connections

PRIMARY DOT (Unbalanced Port)	1
PRIMARY (GND)	2
SECONDARY DOT (Balanced)	4
SECONDARY (Balanced)	3
NO CONNECTION	6
NOT USED (GND Externally)	5

Pads 2,3,4 are DC-connected internally


Outline Drawing

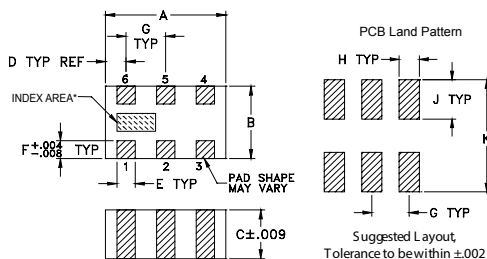

*Shape of index marking may vary

Outline Dimensions (inch/mm)

A	B	C	D	E	F
.079	.049	.033	.014	.012	.012
2.01	1.24	0.84	0.36	0.30	0.30
G	H	J	K	wt	
.026	.014	.039	.110	grams	
0.66	0.36	1.00	2.80	.008	

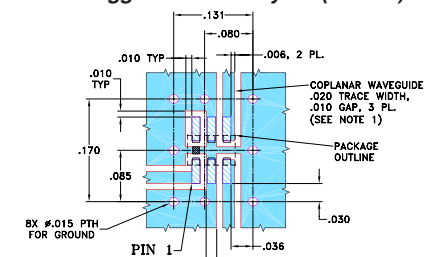Demo Board MCL P/N: TB-419+
Suggested PCB Layout (PL-264)

NOTES:

- COPLANAR WAVEGUIDE PARAMETERS ARE SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .010" ± .001". COPPER: 1/2 OZ, EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH AND GAP MAY NEED TO BE MODIFIED.
- BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER).
- DENOTES COPLANAR WAVEGUIDE LAND PATTERN FREE OF SOLDER MASK

Features

- wideband, 1600 to 2300 MHz
- low phase unbalance, 5 deg. and amplitude unbalance, 0.5 dB typ.
- miniature size, 0.079"x0.049"x0.033"
- LTCC construction
- low cost
- aqueous washable

Applications

- WLAN
- WCDMA
- radar
- PCS

Electrical Specifications (T_{AMB}=25°C)

Ω RATIO (Secondary/Primary)	FREQUENCY (MHz)	INSERTION* LOSS (dB)	PHASE UNBALANCE AT SECONDARY† (Deg.) Typ.	AMPLITUDE UNBALANCE (dB) Typ.
4	1600-2300	1.0	5	0.5




* Insertion Loss is referenced to mid-band loss, 0.8 dB. Reference Demo Board TB-419+

† Relative to 180°


Typical Performance Data at 25°C**

FREQUENCY (MHz)	INSERTION LOSS* (dB)	INPUT R. LOSS (dB)	AMPLITUDE UNBALANCE (dB)	PHASE UNBALANCE (Deg.)
1600.00	0.38	12.22	0.85	4.63
1675.00	0.15	16.70	0.90	5.43
1775.00	0.01	30.41	0.90	6.52
1825.00	0.00	29.75	0.88	7.15
1875.00	0.01	22.28	0.83	7.61
1975.00	0.08	16.15	0.71	8.78
2075.00	0.17	13.28	0.52	9.63
2175.00	0.29	11.67	0.32	10.06
2275.00	0.39	10.72	0.10	9.93
2300.00	0.41	10.55	0.06	9.73

** Measured with Agilent E5071B network analyzer using impedance conversion and port extension.

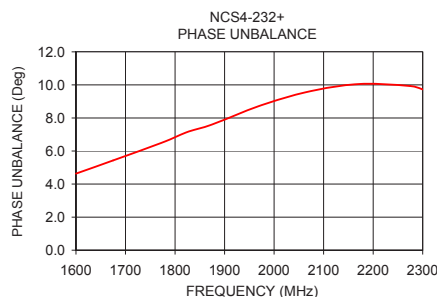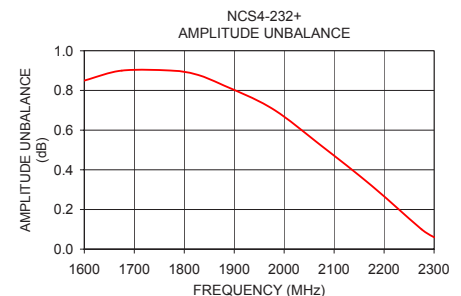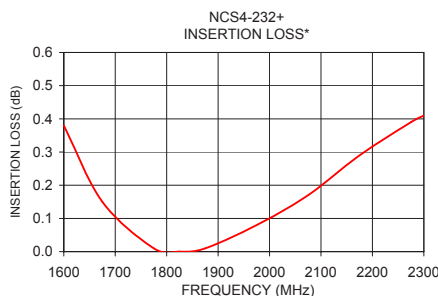

configuration J

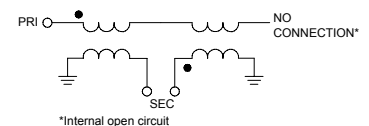

*Internal open circuit