

Power Splitter/Combiner

16 Way-0° 75Ω 695 to 2700 MHz

Maximum Ratings


Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	5.0W max.
DC Current	1A (125mA each)

Permanent damage may occur if any of these limits are exceeded.

Coaxial Connections

SUM PORT	S
PORT 1,2,3....16	1,2,3...16

Outline Drawing

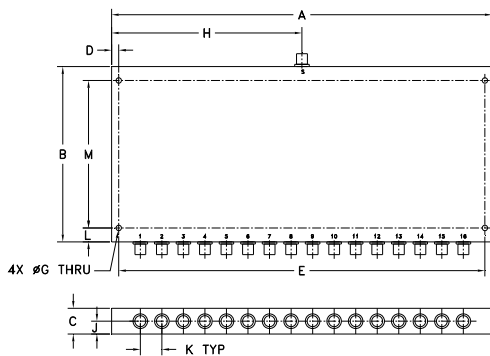


Outline Dimensions (inch/mm)

A	B	C	D	E	F	G
13.25	6.00	.88	.250	12.75	--	.187
336.55	152.40	22.35	6.35	323.85	--	4.75

H	J	K	L	M	N	wt
6.63	.44	.75	.48	5.05	--	grams
168.40	11.18	19.05	12.19	128.27	--	2080

Electrical Schematic




Features

- low insertion loss, 1.0 dB typ.
- excellent input and output VSWR, 1.4:1 typ.
- very high isolation, 24 dB typ.

Applications

- CATV
- WiMAX
- PCS/DCS
- L-Band

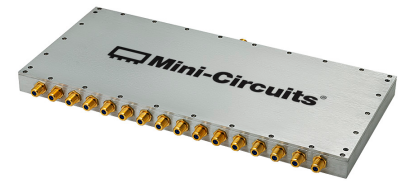

CASE STYLE: UU537

Connectors	Model
75Ω F-Type	ZB16PD-272-75F+

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications




Electrical Specifications at 25°C

Parameter	Frequency (MHz)	Min.	Typ.	Max.	Unit
Frequency		695		2700	MHz
Insertion Loss (above theoretical 12 dB)	900 - 2450	—	1.0	1.9	dB
	695 - 2700	—	1.2	2.2	
Isolation	695 - 2450	18	24	—	dB
	2450 - 2700	14	20	—	
Phase Unbalance	695 - 2700	—	5	11	Degree
Amplitude Unbalance	900 - 2450	—	0.3	0.7	dB
	695 - 2700	—	0.5	0.9	
VSWR (Port S)	900 - 2450	—	1.5	1.85	:1
VSWR (Port 1, 16)	900 - 2450	—	1.4	1.65	:1

Typical Performance Data

Frequency (MHz)	Total Loss ¹ (dB)	Amplitude Unbalance (dB)	Isolation (dB)		Phase Unbalance (deg.)	VSWR S	VSWR 1
			ADJ	OPP			
600	12.66	0.07	18.72	18.62	1.82	1.59	1.05
800	12.61	0.06	27.71	27.48	2.54	1.28	1.09
900	12.54	0.06	37.15	38.42	2.76	1.10	1.09
1000	12.60	0.08	33.67	35.40	3.03	1.19	1.10
1100	12.66	0.09	28.49	29.68	3.34	1.25	1.13
1200	12.72	0.23	28.03	28.07	3.49	1.21	1.14
1300	12.86	0.14	28.16	28.52	3.45	1.50	1.18
1400	12.82	0.10	27.20	27.26	3.62	1.36	1.13
1500	12.86	0.12	23.87	24.05	3.66	1.30	1.20
1700	13.09	0.17	24.71	25.32	4.34	1.53	1.28
1900	13.01	0.08	26.09	27.55	5.79	1.32	1.08
2100	13.00	0.09	32.13	35.72	6.14	1.33	1.13
2300	12.95	0.18	23.67	24.02	6.77	1.10	1.13
2500	12.99	0.31	21.49	22.00	7.46	1.22	1.31
2700	13.20	0.47	17.50	17.58	7.10	1.24	1.42

1. Total Loss = Insertion Loss + 12dB splitter theoretical loss.

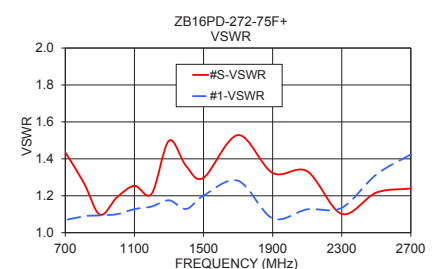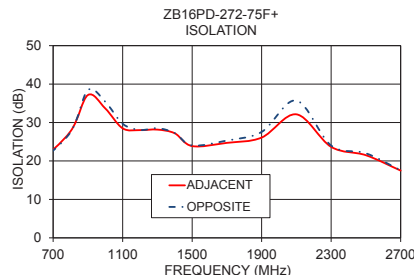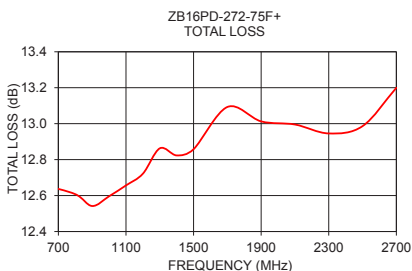

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

