# **EPL8018A3 Pin-Pin Diode Limiter**

8.0-18.0 GHz Broadband



#### **Technical Characteristics**

## **Product Features**

Power Handling: 1 watt CW, 100W peak power

(1 usec Pulse Width, 0.1% Duty Cycle Derated to 20% @ +125 °C)

Internal DC return

Fast recovery time

Limiting threshold above +12dBm typ. & below typical output leakage

Low insertion loss

## **Maximum Ratings**

Storage Temperature	65° to +125°C
Operating Temperature	55° to +90°C
May Input Dower	+2 watte CW 100 watte n

#### lax input Power.....+2 watts CW, 100 watts peal

# **Product Export Classification**

ECCN: EAR 99 (unless otherwise specified)


HTS: 85543.70.8000

Specifications @ +25°C & -10 dBm input power.

# **Electrical Specifications**

Parameters	Freq. (GHz)	Min.	Typical	Max.	Units
Insertion Loss	8.0 to 18.0		2.2		dB
VSWR	8.0 to 18.0		2.0:1		-
Leakage Power (CW)	8.0 to 18.0			+19	dBm CW
				+20	dBm Peak
Operating Temperature		-55		+90	° C

## Outline drawing

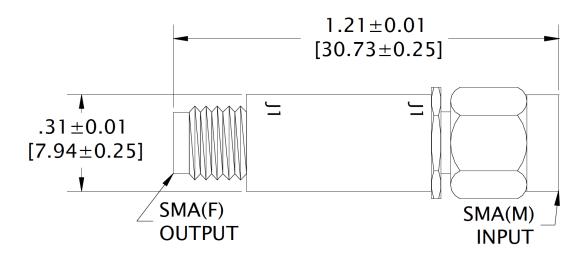

# Notes:

Copyright EclipseMDI

- 1. Limiter has an internal DC block.
- 2. Typical values are measured at +25°C and are not guaranteed.

Quality products that serve the industry. Today and tomorrow.





