

EPL2040A3 Pin-Pin Diode Limiter

2.0-4.0 GHz



Technical Characteristics

Product Features

Power Handling: 2 watt CW, 100W peak power
(1 usec Pulse Width, 0.1% Duty Cycle Derated to 20% @ +125 °C)
Internal DC Block
Broadband frequency response

Maximum Ratings


Storage Temperature.....	-65° to +155°C
Operating Temperature.....	-55° to +125°C
Max Input Power.....	+2 watts CW, 100 watts peak
Shock.....	50Gs, 11 mSec
Vibration.....	20Gs, 100 to 2000Hz

Specifications @ +25°C & -10 dBm input power.

Electrical Specifications

Parameters	Freq. (GHz)	Min.	Typical	Max.	Units
Insertion Loss	2.0 to 4.0		0.8		dB
VSWR	2.0 to 4.0		1.5:1		
Leakage Power (CW)	2.0 to 4.0			+20	dBm CW
				+23	dBm Peak
Limiting Threshold	2.0 to 4.0		+13		dBm
Peak Power Handling	2.0 to 4.0			100	Watts
(1µsec Pulse width, 0.1% duty cycle, derated to 20% @ +125° C					
CW Power Handling				1.0	Watts
Operating Temperature		-55 °		+125 °	° C

Outline drawing

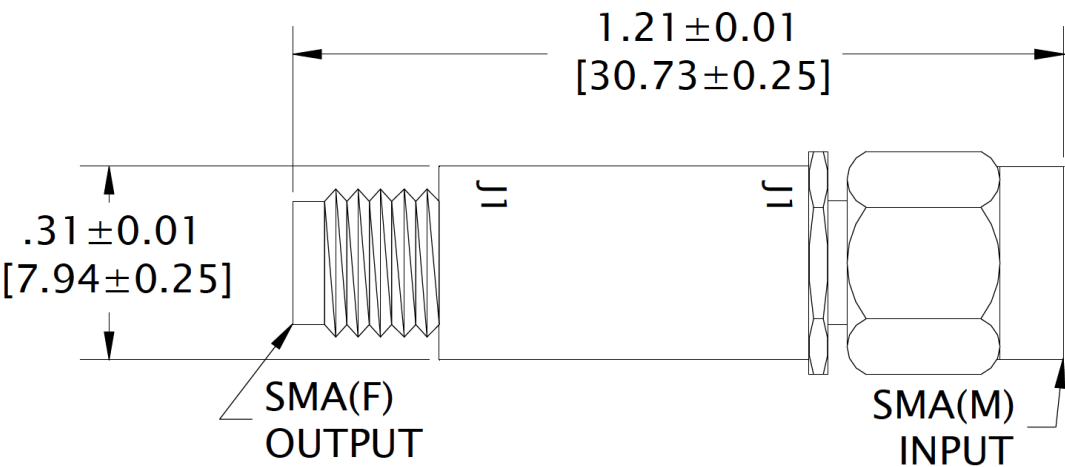

- Notes:
1. Limiter has an internal DC block.
 2. Typical values are measured at +25°C and are not guaranteed.