# ESL0510A2 Pin-Schottky Diode Limiter

0.5-1.0 GHz Octave Band



#### **Technical Characteristics**

#### Product Features

Power Handling: 1 watt CW, 100W peak power

(1 usec Pulse Width, 0.1% Duty Cycle Derated to 20% @ +125 °C)

Internal DC return

Fast recovery time - 200 uSec typ.

Limiting threshold above +4dBm typ. & low typical output leakage Low insertion loss

#### **Maximum Ratings**

Storage Temperature	65° to +125°C
Operating Temperature	55° to +90°C
Max Input Power	+2 watts CW, 100 watts peak

#### **Product Export Classification**


ECCN: EAR 99 (unless otherwise specified) HTS: 85543.70.8000

Specifications @ +25°C & -10 dBm input power.

## **Electrical Specifications**

Parameters	Freq. (GHz)	Min.	Typical	Max.	Units
Insertion Loss	0.5 to 1.0		0.5		dB
VSWR	0.5 to 1.0		1.5:1		-
Leakage Power (CW)	0.5 to 1.0			+18	dBm CW
				+20	dBm Peak
Operating Temperature		-55		+90	° C

### Outline drawing

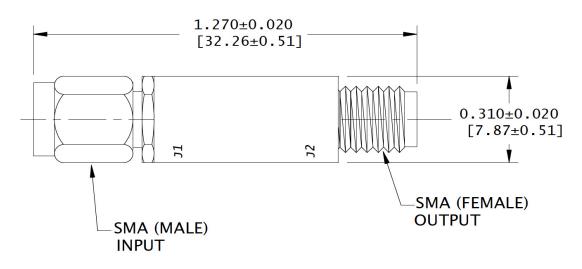

#### Notes:

1. Limiter has an internal DC block.

2. Typical values are measured at +25°C and are not guaranteed.

**1.408.526.1100** 

