

Ultra-Reliable Low Pass Filter

50Ω DC to 1350 MHz

VLP-16



CASE STYLE: FF704

Connectors	Model
SMA	VLP-16

Maximum Ratings

Operating Temperature -55°C to 100°C

Storage Temperature -55°C to 100°C

RF Power Input* 15W max. at 25°C

* Passband rating, derate linearly to 0.4xPmax at 100°C ambient. Permanent damage may occur if any of these limits are exceeded.


Features

- rugged unibody construction
- low insertion loss passband, less than 1 dB typ.
- excellent power handling, 15W
- low cost

Applications

- harmonic rejection
- transmitters/receivers
- lab use

Outline Drawing

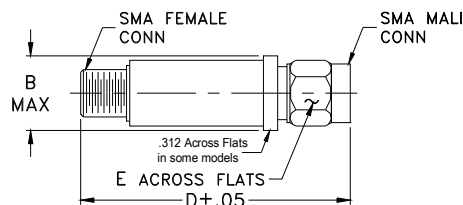


Outline Dimensions (inch/mm)

B	D	E	wt
.410	1.43	.312	grams
10.41	36.32	7.92	10.0


Electrical Specifications (T_{AMB}=25°C)

PASSBAND (MHz) (loss < 1 dB)	f _{co} , MHz Nom. (loss 3 dB)	STOP BAND (MHz)			VSWR (:1) Passband Typ.
		(loss > 20 dB)	(loss > 30 dB)	fr20 dB Typ.	
DC-1350	1550	2100	2700-4500	7000	1.1

typical frequency response





electrical schematic



Typical Performance Data

Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)
10.00	0.05	1.01
1000.00	0.49	1.12
1350.00	0.72	1.11
1550.00	1.53	1.89
1700.00	5.16	5.81
2100.00	20.75	39.56
2700.00	45.01	62.90
4000.00	38.83	52.45
7000.00	16.02	7.35
8000.00	9.31	7.38

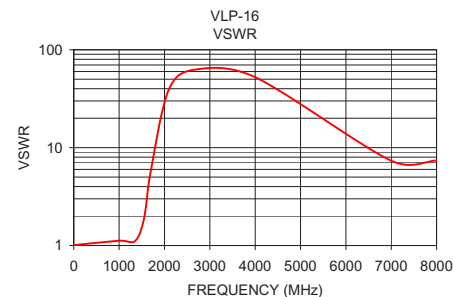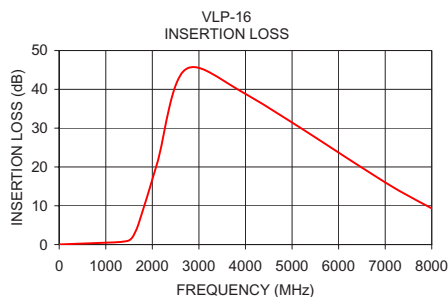

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
 B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
 C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. C
M151107
VLP-16
ED-10545B/1
WZ/AD/CP
151012