



TGA2598

6 – 12 GHz 2W GaN Driver Amplifier

Product Overview


Qorvo's TGA2598 is a broadband MMIC driver amplifier fabricated on Qorvo's production 0.25um GaN on SiC process (QGaN25). Covering 6-12GHz, the TGA2598 provides more than 33dBm of saturated output power and 21dB of small signal gain while achieving more than 31% power-added efficiency.

The TGA2598 is an ideal choice to drive Qorvo's high performing x-band GaN HPAs allowing the user to run both driver and HPA off the same voltage rail.

Fully matched to 50Ω with integrated DC blocking capacitors on both I/O ports, the TGA2598 is ideally suited for both military and commercial radar and communications applications.



Functional Block Diagram

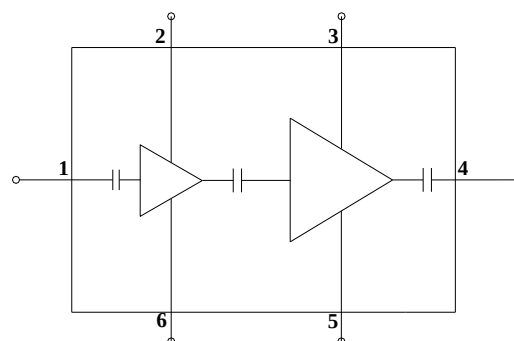

Key Features

- Frequency Range: 6 – 12 GHz
- P_{SAT} : >33 dBm
- PAE: >31%
- Small Signal Gain: >21 dB
- Input Return Loss: >9 dB
- Output Return Loss: >11 dB
- Bias: $V_D = 25$ V, $I_{DQ} = 100$ mA, $V_G = -2.6$ V Typical
- Chip Dimensions: 2.14 x 1.11 x 0.10 mm

Applications

- Commercial and military radar
- Communications
- Electronic Warfare (EW)

Ordering Information

Part No.	Description
TGA2598	6 – 12 GHz 2W GaN Driver Amplifier
1110980	TGA2598 Evaluation Board

Recommended Operating Conditions

Parameter	Values	Units
Drain Voltage	25	V
Drain Current (quiescent, I_{DQ})	100	mA
Gate Voltage (typical)	- 2.6	V
Operating Temperature Range	- 40 to 85	°C

Electrical specifications are measured at specified test conditions. Specifications are not guaranteed over all recommended operating conditions.

Electrical Specifications

Test conditions unless otherwise noted: $V_D = + 25$ V, $I_{DQ} = 100$ mA, $V_G = - 2.6$ V typical, CW Mode, 25 °C.
Data de-embedded to MMIC bond wires

Parameter	Min	Typ	Max	Units
Operational Frequency Range	6		12	GHz
Small Signal Gain		21		dB
Input Return Loss		9		dB
Output Return Loss		11		dB
Output Power (P_{SAT} , CW)		33		dBm
Power Added Efficiency (P_{SAT} , CW)		31		%
Small Signal Gain Temperature Coefficient		-0.05		dB/°C
Output Power Temperature Coefficient		-0.01		dBm/°C
Recommended Operating Voltage:		25	30	V

Absolute Maximum Ratings

Parameter	Range / Value	Units
Drain Voltage (V_D)	40	V
Gate Voltage Range (V_G)	-8 to 0	V
Drain Current (I_{D1})	128	mA
Drain Current (I_{D2})	260	mA
Gate Current (I_{G1})	1.4	mA
Gate Current (I_{G2})	2.8	mA
Power Dissipation (P_{DISS}), 85°C	6	W
Input Power (P_{IN}), CW, 50 Ω , $V_D=25V$, $I_{DQ}=100mA$, 85°C,	30	dBm
Input Power (P_{IN}), CW, VSWR 10:1, $V_D=25V$, $I_{DQ}=100mA$, 85°C	30	dBm
Mounting Temperature (30 Seconds)	320	°C
Storage Temperature	-55 to 150	°C

Operation of this device outside the parameter ranges given above may cause permanent damage. These are stress ratings only, and functional operation of the device at these conditions is not implied. Extended application of Absolute Maximum Rating conditions to the device may reduce device reliability.

Thermal and Reliability Information






Parameter	Values	Units	Conditions
Under Drive, Thermal Resistance (θ_{JC}) ^(1,2,3)	14.52	°C/W	$T_{BASE} = 85^\circ C$, $V_D = +25V$, CW $I_{DQ} = 100mA$, $I_{D_DRIVE} = 285 mA$ $P_{IN} = +20 dBm$, $P_{OUT} = +33.5 dBm$, $P_{DISS} = 4.8 W$
Channel Temperature (T_{CH})	154.69	°C	

Notes:

1. Thermal resistance is measured to package backside
2. Base or ambient temperature is 85 °C
3. Refer to the following document: [GaN Device Channel Temperature, Thermal Resistance, and Reliability Estimates](#)







Performance Plots – Small Signal

Test conditions unless otherwise noted: $V_D = +25\text{ V}$, $I_{DQ} = 100\text{ mA}$, Temp. = $+25\text{ }^{\circ}\text{C}$

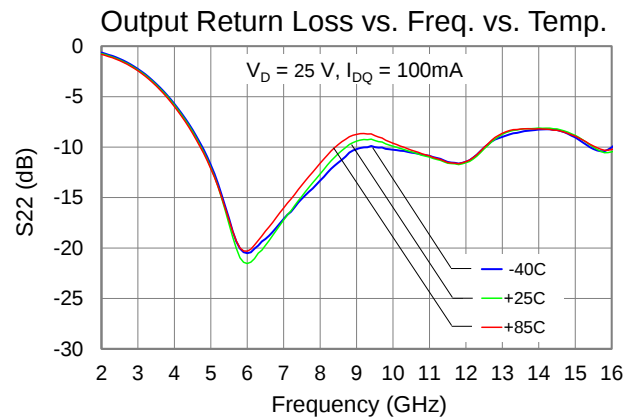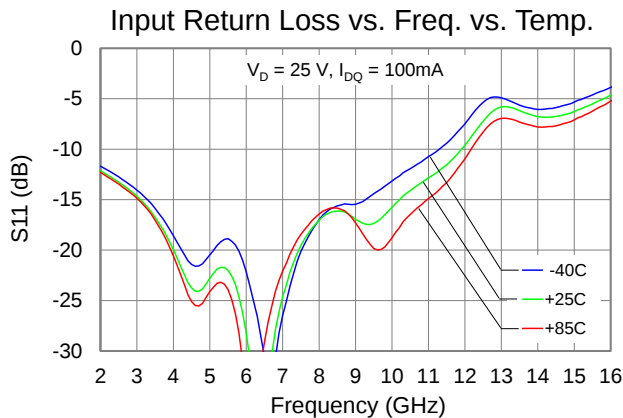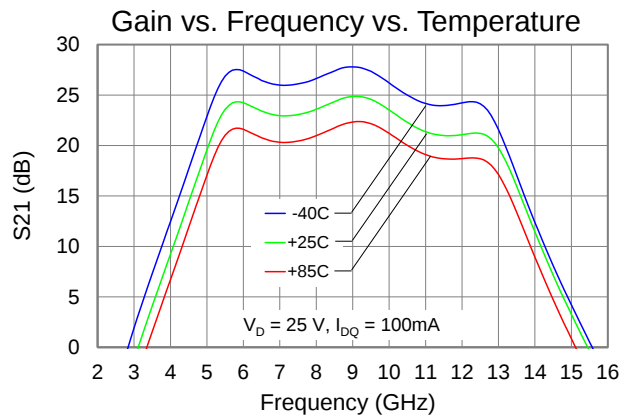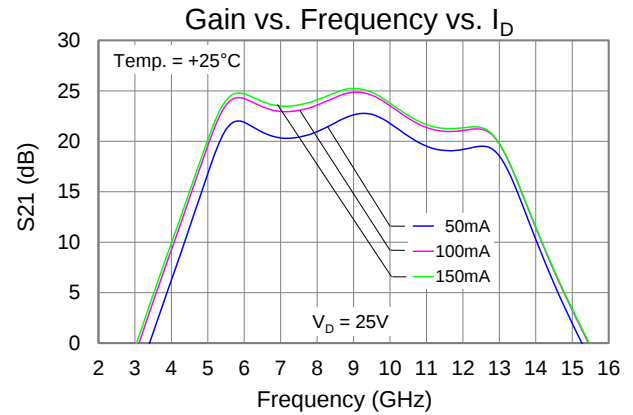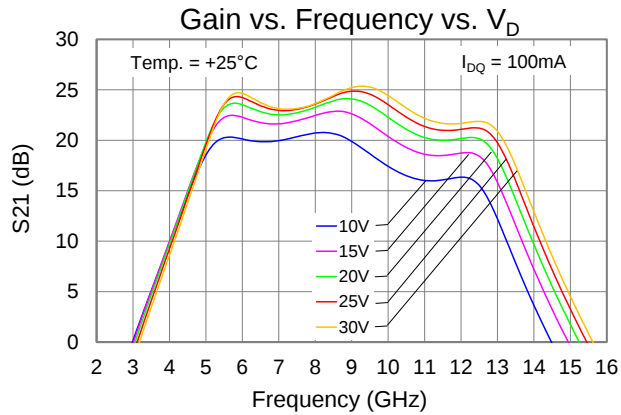







Performance Plots – Large Signal

Test conditions unless otherwise noted: $V_D = +25\text{ V}$, $I_{DQ} = 100\text{ mA}$, CW, Temp. = $+25\text{ }^\circ\text{C}$

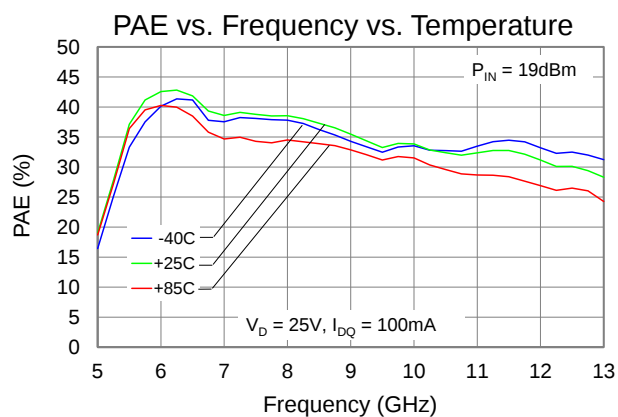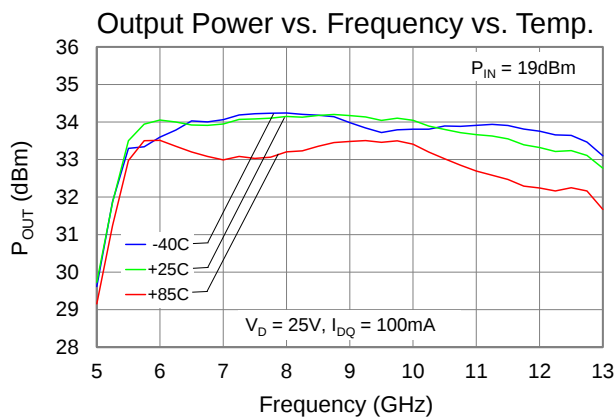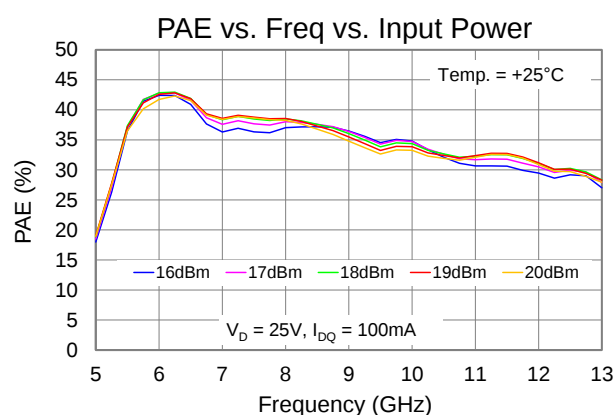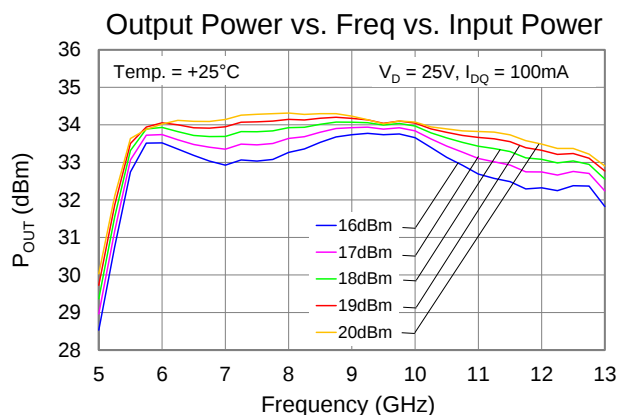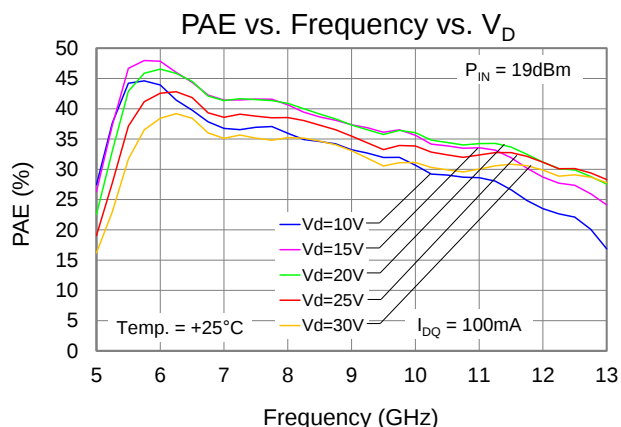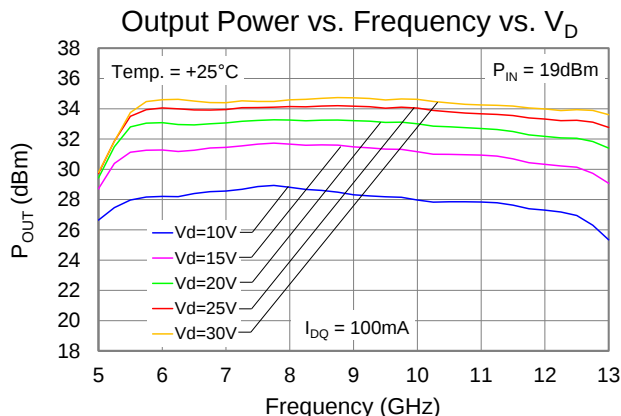







Performance Plots – Large Signal

Test conditions unless otherwise noted: $V_D = +25\text{ V}$, $I_{DQ} = 100\text{ mA}$, CW, Temp. = $+25\text{ }^{\circ}\text{C}$

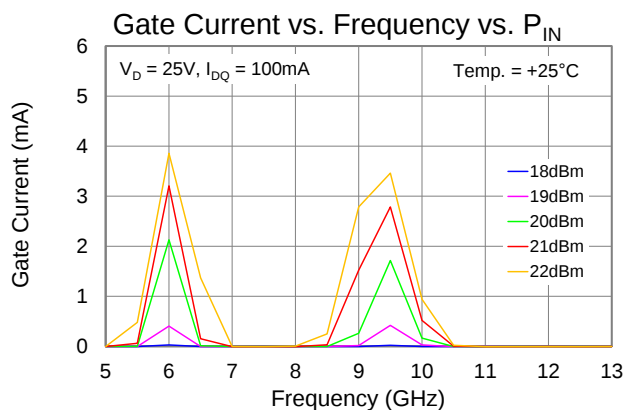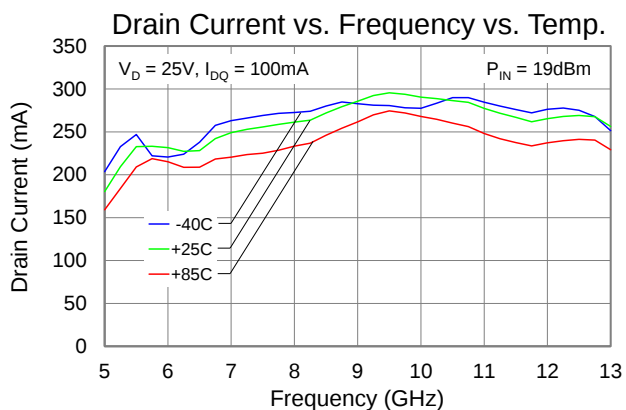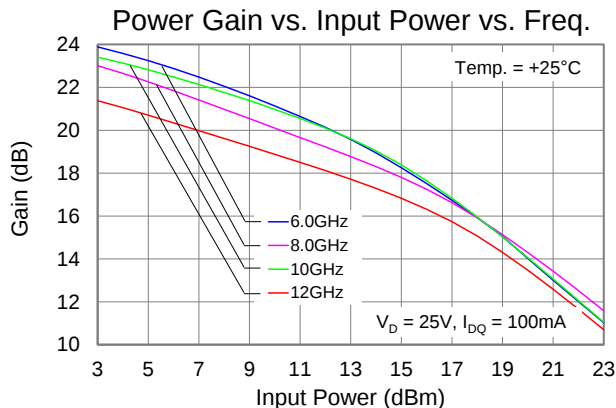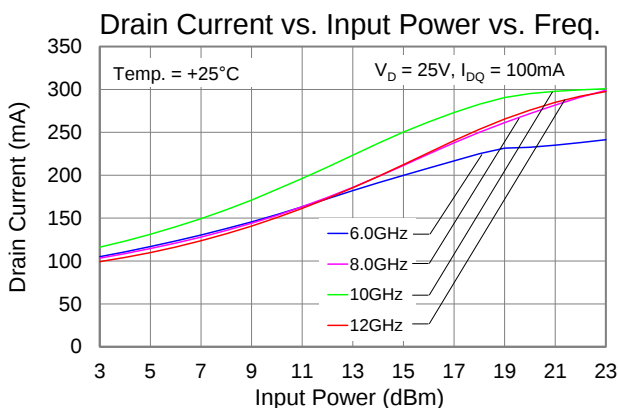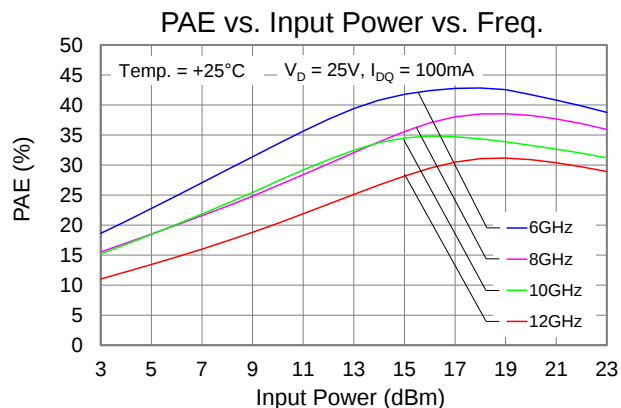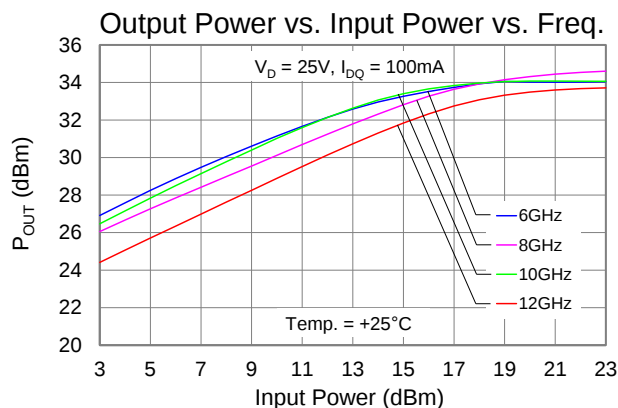





Performance Plots – Linearity

Test conditions unless otherwise noted: $V_D = +25\text{ V}$, $I_{DQ} = 100\text{ mA}$, Temp. = $+25\text{ }^{\circ}\text{C}$

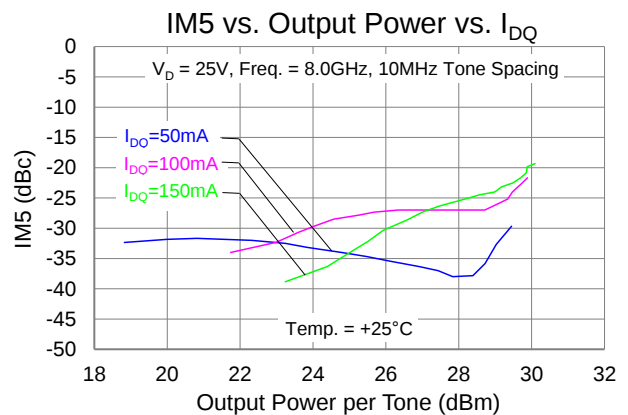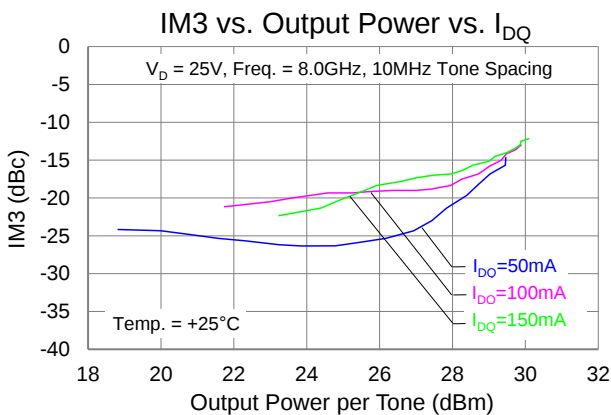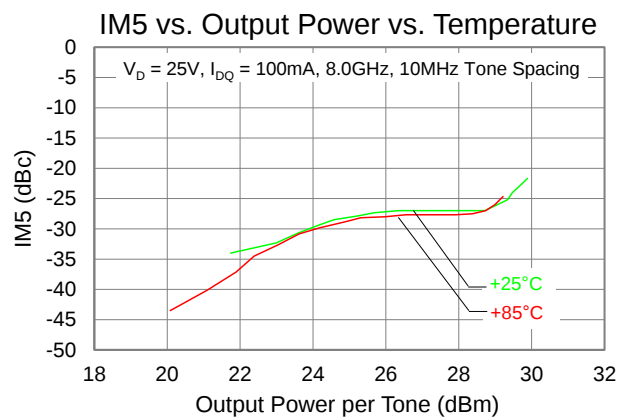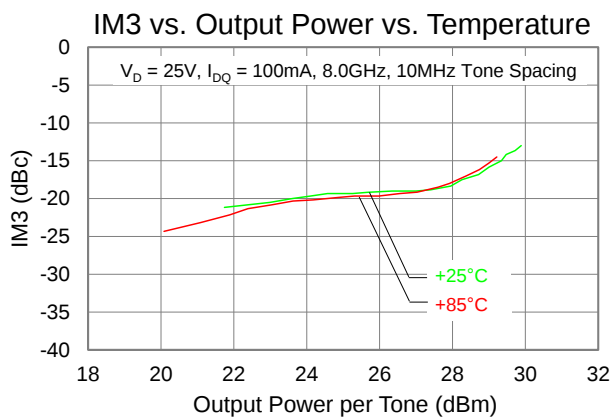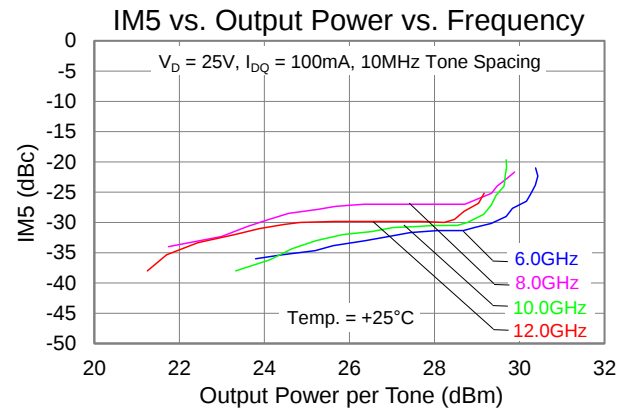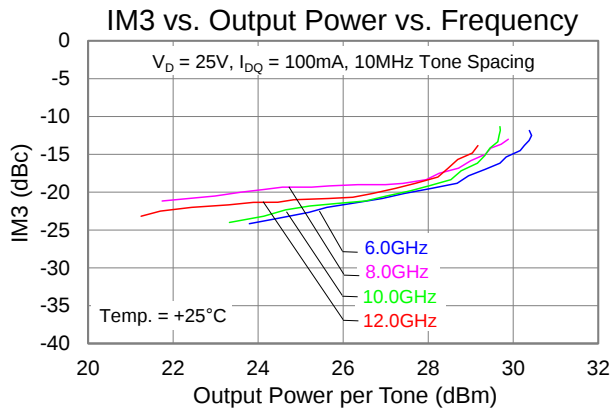


Performance Plots – Harmonics

Test conditions unless otherwise noted: $V_D = +25\text{ V}$, $I_{DQ} = 100\text{ mA}$, Temp. = $+25^\circ\text{C}$

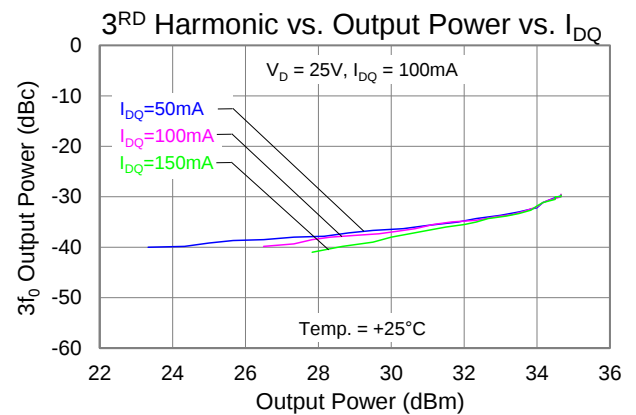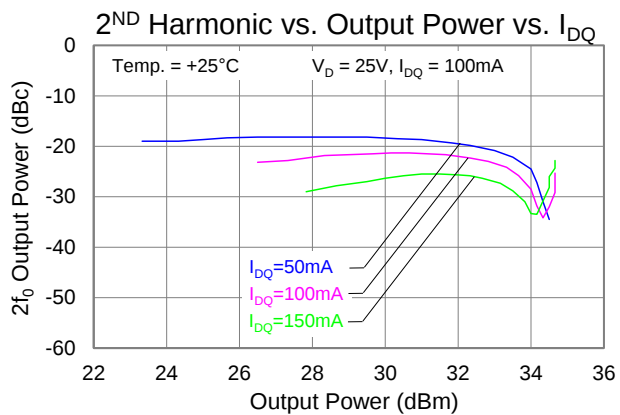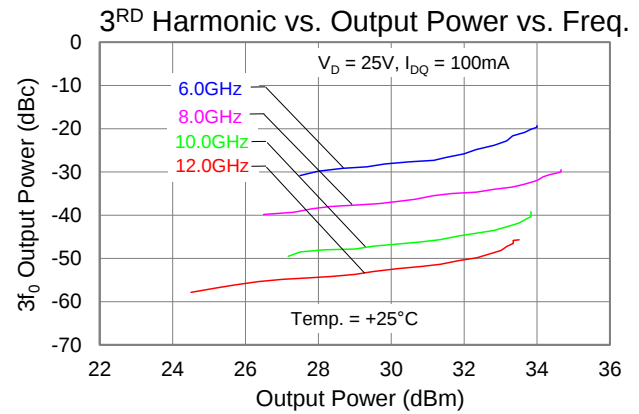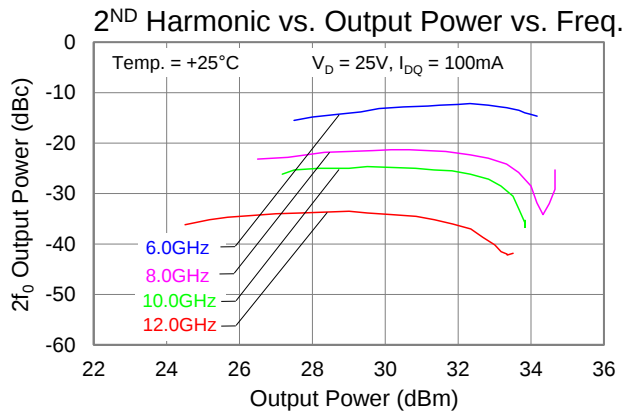

Mechanical Drawing and Bond Pad Description

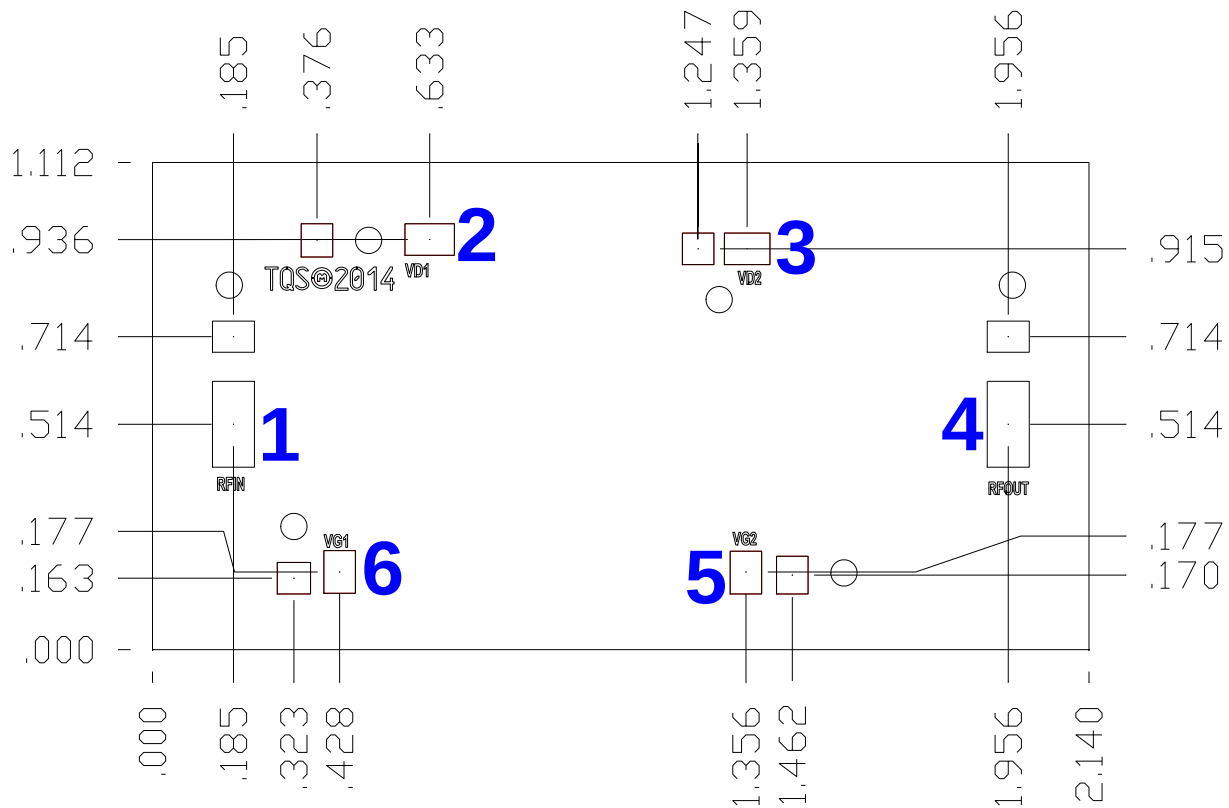

Dimensions in mm, Die Thickness: 0.10, Die x, y size tolerance: +/- 0.050
Chip edge to bond pad dimensions are shown to center of pad

Bond Pad No.	Symbol	Pad Size	Description
1	RF IN	0.096 x 0.196	Input; matched to 50 ohms; DC blocked.
2	VD1	0.113 x 0.072	Drain voltage 1, bias network is required; see Application Circuit as an example
3	VD2	0.104 x 0.072	Drain voltage 2, bias network is required; see Application Circuit as an example
4	RF OUT	0.096 x 0.196	Output; matched to 50 ohms; DC blocked.
5	VG2	0.072 x 0.098	Gate voltage 2, bias network is required; see Application Circuit as an example
6	VG1	0.072 x 0.098	Gate voltage 1, bias network is required; see Application Circuit as an example

Assembly Notes

Component placement and adhesive attachment assembly notes:

- Vacuum pencils and/or vacuum collets are the preferred method of pick up.
- Air bridges must be avoided during placement.
- The force impact is critical during auto placement.
- Organic attachment (i.e., conductive epoxy) can be used in low-power applications.
- Curing should be done in a convection oven; proper exhaust is a safety concern.


Reflow process assembly notes:

- Use AuSn (80/20) solder and limit exposure to temperatures above 300°C to 3-4 minutes, maximum.
- Conductive epoxy die attach is recommended for PCB mounting.
- Bonding pads plating: Au.
- An alloy station or conveyor furnace with reducing atmosphere should be used.
- Do not use any kind of flux.
- Coefficient of thermal expansion matching is critical for long-term reliability.
- Devices must be stored in a dry nitrogen atmosphere.

Interconnect process assembly notes:

- Thermosonic ball bonding is the preferred interconnect technique.
- Force, time, and ultrasonic are critical parameters.
- Aluminum wire should not be used.
- Devices with small pad sizes should be bonded with 0.0007-inch wire.

Evaluation Board and BOM

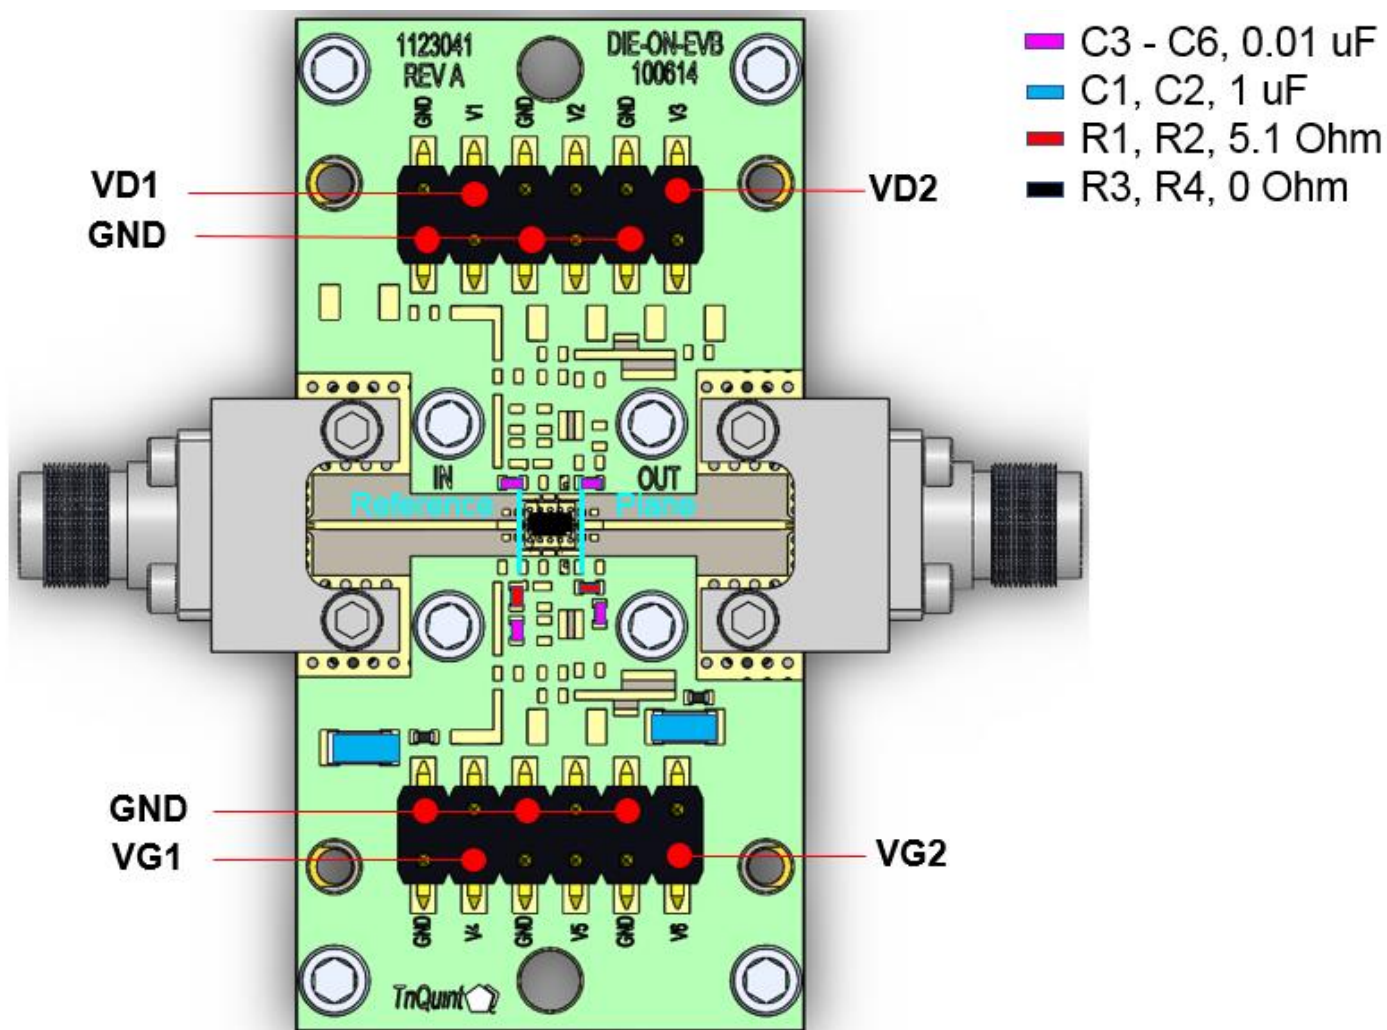


RF Layer is 0.008" thick Rogers Corp. RO4003C ($\epsilon_r = 3.35$). Metal layers are 0.5 oz. copper. The microstrip line at the connector interface is optimized for the Southwest Microwave end launch connector 1092-01A-5.

Bill of Material – Evaluation Board

Ref. Des.	Value	Description	Manuf.	Part Number
C1 – C2	1uF	Cap, 1206, 16V, 20%, X5R	Various	
C3 – C6	0.01uF	Cap, 0402, 50V, 10%, X7R	Various	
R1 – R2	5.1Ω	Res, 0402, 5%	Various	
RF IN, RF OUT	2.92 mm	2.92 MM END LAUNCH CONNECTOR	Southwest Microwave	1092-01A-5

Application Circuit and Biasing Sequence

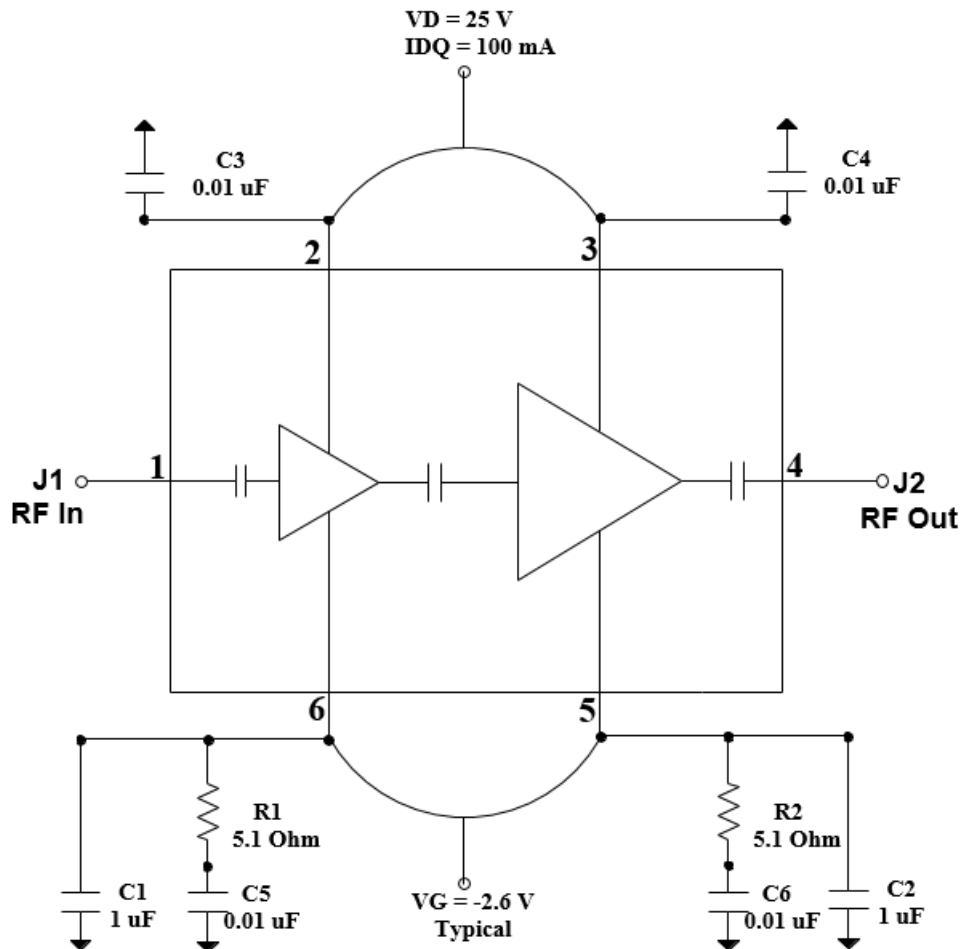

Notes:

1. Can use separate gate and drain for individual stage controls.

Bias-up Procedure

1. Set I_D limit to 320mA, I_G limit to 4mA
2. Apply -5.0V to V_G
3. Apply +25V to V_D
4. Adjust V_G more positive until $I_{DQ} = 100\text{mA}$ ($V_G \sim -2.6\text{ V}$ Typical)
5. Apply RF signal

Bias-down Procedure

1. Turn off RF signal
2. Reduce V_G to -5.0V. Ensure $I_{DQ} \sim 0\text{mA}$
3. Set V_D to 0V
4. Turn off V_D supply
5. Turn off V_G supply

Handling Precautions

Parameter	Rating	Standard
ESD – Human Body Model (HBM)	0B	ESDA / JEDEC JS-001-2012



Caution!
ESD-Sensitive Device

RoHS Compliance

This part is compliant with 2011/65/EU RoHS directive (Restrictions on the Use of Certain Hazardous Substances in Electrical and Electronic Equipment) as amended by Directive 2015/863/EU.

This product also has the following attributes:

- Lead Free
- Halogen Free (Chlorine, Bromine)
- Antimony Free
- TBBP-A (C₁₅H₁₂Br₄O₂) Free
- PFOS Free
- SVHC Free

Contact Information

For the latest specifications, additional product information, worldwide sales and distribution locations:

Tel: 1-844-890-8163

Web: www.qorvo.com

Email: customer.support@qorvo.com

For technical questions and application information: **Email:** appsupport@qorvo.com

Important Notice

The information contained herein is believed to be reliable; however, Qorvo makes no warranties regarding the information contained herein and assumes no responsibility or liability whatsoever for the use of the information contained herein. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders for Qorvo products. The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information. **THIS INFORMATION DOES NOT CONSTITUTE A WARRANTY WITH RESPECT TO THE PRODUCTS DESCRIBED HEREIN, AND QORVO HEREBY DISCLAIMS ANY AND ALL WARRANTIES WITH RESPECT TO SUCH PRODUCTS WHETHER EXPRESS OR IMPLIED BY LAW, COURSE OF DEALING, COURSE OF PERFORMANCE, USAGE OF TRADE OR OTHERWISE, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.**

Without limiting the generality of the foregoing, Qorvo products are not warranted or authorized for use as critical components in medical, life-saving, or life-sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.

Copyright 2019 © Qorvo, Inc. | Qorvo is a registered trademark of Qorvo, Inc.