



RF-LAMBDA

LEADER OF RF BROADBAND SOLUTIONS

R35M55MSA

Wide Band Low Noise Amplifier 350MHz ~ 550MHz



Features

- Gain: 16dB Typical
- Noise Figure: 1.2dB Typical
- P1dB Output Power: +21dBm
- Supply Voltage: +5V

Typical Applications

- Wireless Infrastructure
- RF Microwave & VSAT
- Military & Aerospace

Electrical Specifications, TA = +25°C, Vcc = +5V

Parameter	Min.	Typ.	Max.	Units
Frequency Range	350		550	MHz
Gain	14	16		dB
Gain Flatness		±0.5	±1.0	dB
Gain Variation Over Temperature (-45 ~ +85)		±0.5		dB
Noise Figure		1.2	1.8	dB
Input VSWR		1.8	2.2	: 1
Output VSWR		1.6	2.0	: 1
Output Power for 1 dB Compression (P1dB)	18	21		dBm
Saturated Output Power (Psat)		23		dBm
Output Third Order Intercept (IP3)		36		dBm
Supply Current (Vcc=+5V)		115	200	mA
Isolation S12		-22		dB
Weight	0.35			ounces
Impedance	50			Ohms
Input / Output Connectors	SMA - Female			
Finish	Gold Plated			
Material	Aluminum			
Package Seal	Epoxy Sealed (Standard)			
	Hermetically Sealed (Optional)			

Wide Band Low Noise Amplifier 350MHz~550MHz



RF-LAMBDA

LEADER OF RF BROADBAND SOLUTIONS

R35M55MSA

Absolute Maximum Ratings

Operating Voltage	+6V
RF Input Power	+23 dBm

Biasing Up Procedure

Step 1	Connect Ground Pin
Step 2	Connect input and output
step3	Connect +5V biasing
Power OFF Procedure	
Step 1	Turn off +5V biasing
Step 2	Remove RF connection
Step 3	Remove Ground.

Environmental Specifications and Test Standards

Parameter	Standard	Description
Operational Temperature	MIL-STD-39016	-45°C~+85°C
Storage Temperature		-55°C~+125°C
Thermal Shock		1 Hour@ -45°C → 1 Hour @ +85°C (5 Cycles)
Random Vibration		Acceleration Spectral Density 6 (m/s) Total 92.6 RMS
Electrical & Temperature Burn In		Temperature +85°C for 72 Hours
Shock		1. Weight >20g, 50g half sine wave for 11ms, Speed variation 3.44m/s 2. Weight <=20g, 100g Half sine wave for 6ms, Speed variation 3.75m/s 3. Total 18 times (6 directions, 3 repetitions per direction).
Altitude	MIL-STD-883	Standard: 30,000 Ft (Epoxy Sealed Controlled Environment) Optional: Hermetically Sealed (60,000 ft. 1.0 PSI min)
Hermetically Sealed (Optional)		MIL-STD-883 (For Hermetically Sealed Units)

Wide Band Low Noise Amplifier 350MHz~550MHz




RF-LAMBDA

LEADER OF RF BROADBAND SOLUTIONS


R35M55MSA

Typical Performance Plots


Gain @+25°C

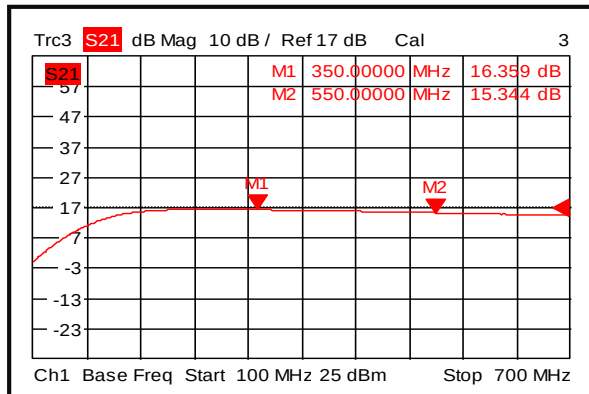


Input VSWR @+25°C

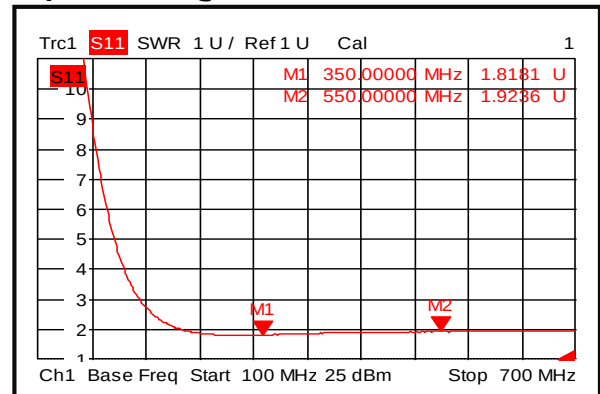


Output VSWR @+25°C

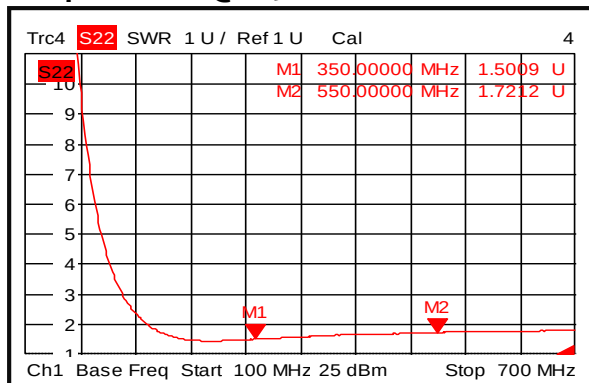


Isolation @+25°C

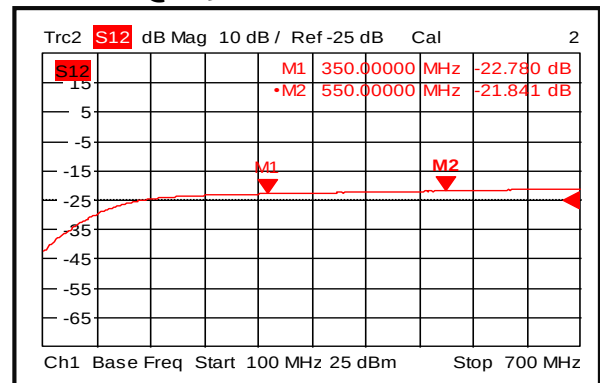


Gain @-45°C

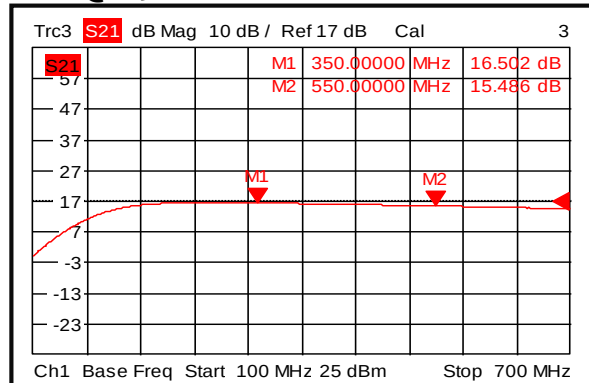


Input VSWR @-45°C

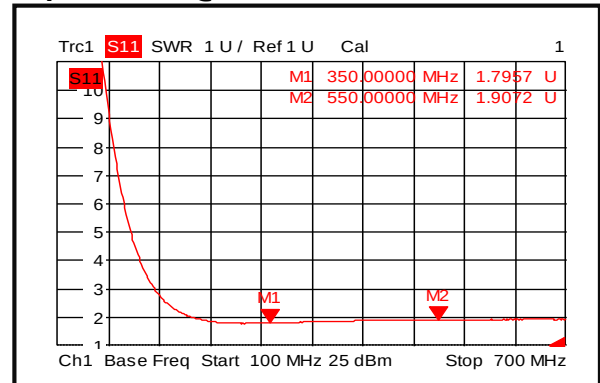

Output VSWR @-45°C

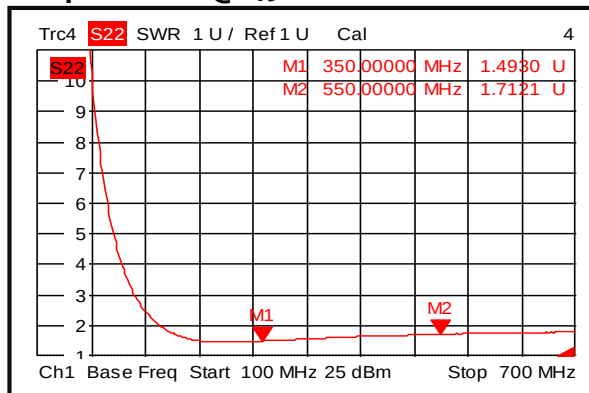

Isolation @-45°C

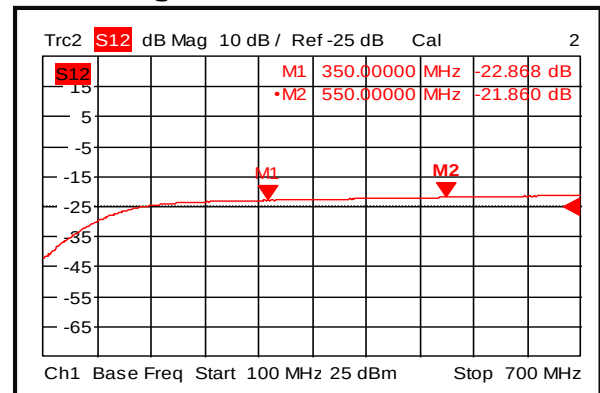

Wide Band Low Noise Amplifier 350MHz~550MHz




RF-LAMBDA


LEADER OF RF BROADBAND SOLUTIONS

R35M55MSA


Gain @+85°C

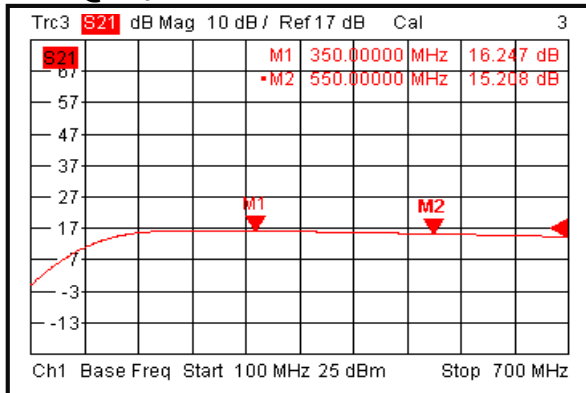


Input VSWR @+85°C

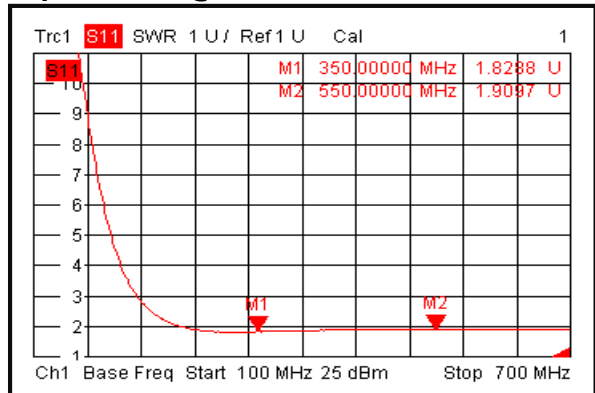


Output VSWR @+85°C

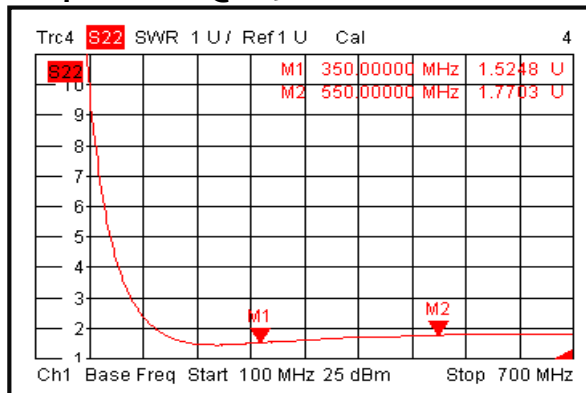


Isolation @+85°C

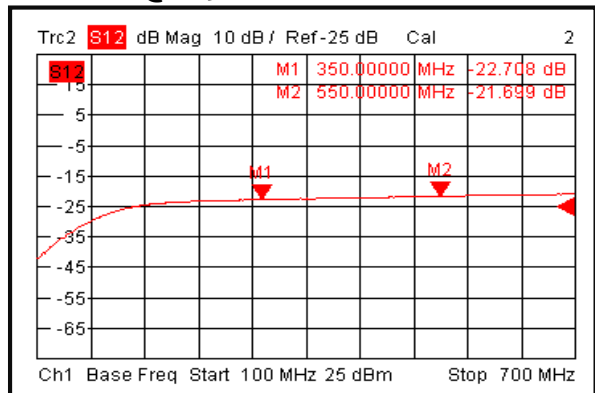


Gain vs. Output Power

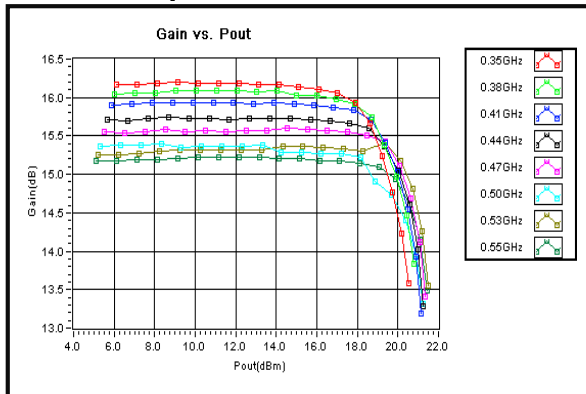


P1dB vs. Frequency

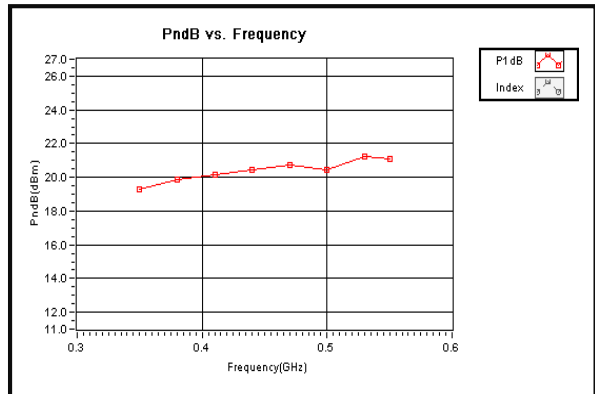

Output Third Order Intercept (IP3)

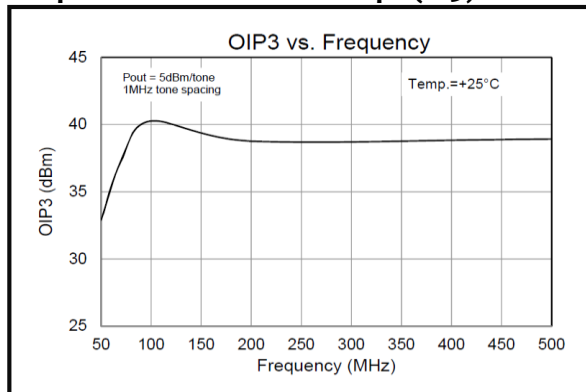

Noise Figure

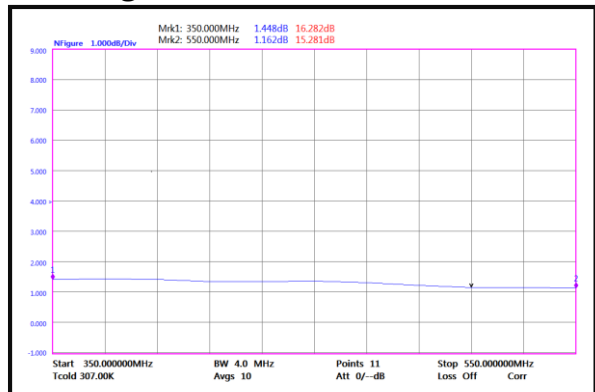


Wide Band Low Noise Amplifier 350MHz~550MHz



Outline Drawing:

All Dimensions in mm [inches]

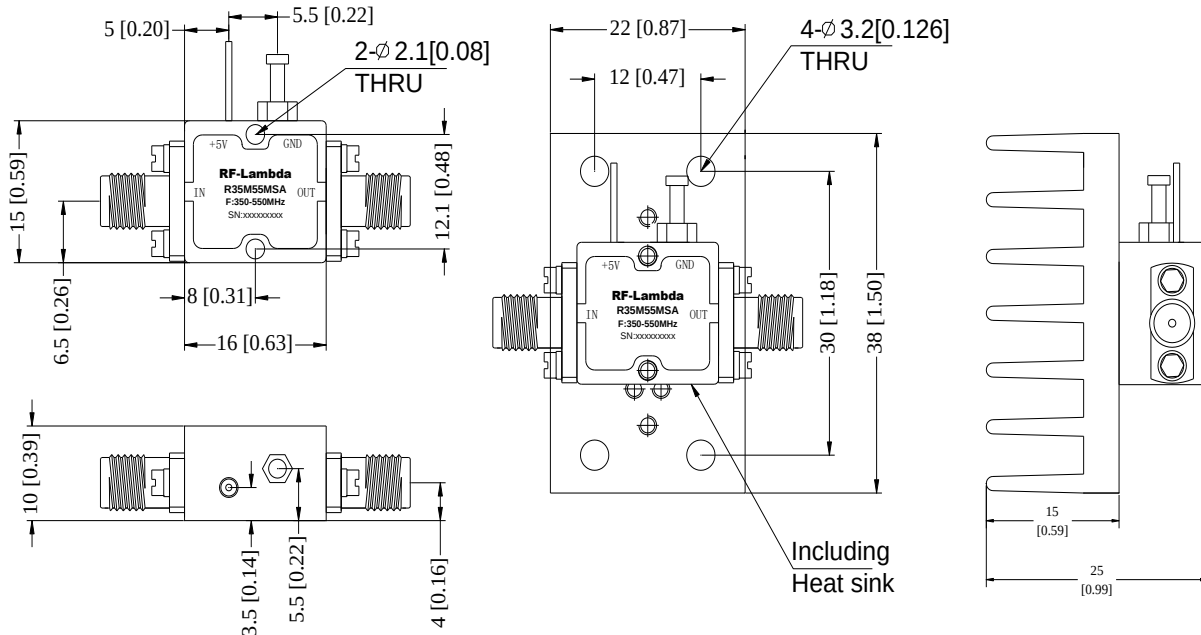

Heat Sink required during operation (Sold Separately)



Ordering Information

Part No.	ECCN	Description
R35M55MSA	EAR99	350-550MHz Low Noise Amplifier

Important Notice

The information contained herein is believed to be reliable. RF-Lambda makes no warranties regarding the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for any of the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for the use of the information contained herein. The information contained herein is provided "AS IS, WHERE IS" and with all faults, and the entire risk associated with such information is entirely with the user. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders for RF-Lambda products. The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information. RF-Lambda products are not warranted or authorized for use as critical components in medical, life-saving, or life sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.