




RF-LAMBDA

LEADER OF RF BROADBAND SOLUTIONS

RLNAW28B

WR28 Low Noise Amplifier 26.5GHz ~ 40GHz



Features

- Gain: 48dB Typical
- Noise Figure: 3.0dB Typical
- P1dB Output Power: +21dB m Typical
- Supply Voltage: +12V

Typical Applications

- Wireless Infrastructure
- RF Microwave & VSAT
- Military & Aerospace
- Test Instrument

Electrical Specifications, $T_A = +25^\circ\text{C}$, $V_{CC} = +12\text{V}$

Parameter	Min.	Typ.	Max.	Min.	Typ.	Max.	Units
Frequency Range	26.5		32	32		40	GHz
Gain	45	48		40	45		dB
Gain Flatness		± 2.0			± 3.0		dB
Gain Variation Over Temperature (-45 ~ +85)		± 2.0			± 3.0		dB
Noise Figure		3.0	4.0		3.5	4.5	dB
Input VSWR		2.0			2.2		: 1
Output VSWR		2.0			2.2		: 1
Output 1dB Compression Point (P1dB)	18	21		16	19		dBm
Saturated Output Power (Psat)		23			20		dBm
Output Third Order Intercept (IP3)		26			23.5		dBm
Isolation S12		-60			-60		dB
Supply Current ($V_{CC}=+12\text{V}$)		420	500		420	500	mA
Weight	2.12						ounces
Impedance	50						Ohms
Input / Output Connectors	WR28						
Finish	Gold Plated						
Material	Copper						
Package Sealing	Epoxy Sealed						

WR28 Low Noise Amplifier 26.5GHz ~ 40GHz



RF-LAMBDA

LEADER OF RF BROADBAND SOLUTIONS

RLNAW28B

Absolute Maximum Ratings

Operating Voltage	+15V
RF Input Power	-20dBm

Biasing Up Procedure

Step 1	Connect Ground Pin
Step 2	Connect input and output
Step 3	Connect +12V biasing
Power OFF Procedure	
Step 1	Turn off +12V biasing
Step 2	Remove RF connection
Step 3	Remove Ground.

Environmental Specifications and Test Standards


Parameter	Standard	Description
Operational Temperature	MIL-STD-39016	-45°C~+85°C
Storage Temperature		-55°C~+125°C
Thermal Shock		1 Hour@ -45°C → 1 Hour @ +85°C (5 Cycles)
Random Vibration		Acceleration Spectral Density 6 (m/s) Total 92.6 RMS
Electrical & Temperature Burn In		Temperature +85°C for 72 Hours
Shock		1. Weight >20g, 50g half sine wave for 11ms, Speed variation 3.44m/s 2. Weight <=20g, 100g Half sine wave for 6ms, Speed variation 3.75m/s 3. Total 18 times (6 directions, 3 repetitions per direction).
Altitude	MIL-STD-883	Standard: 30,000 Ft (Epoxy Sealed Controlled Environment) Optional: Hermetically Sealed (60,000 ft. 1.0 PSI min)
Hermetically Sealed (Optional)		MIL-STD-883 (For Hermetically Sealed Units)

WR28 Low Noise Amplifier 26.5GHz ~ 40GHz




Typical Performance Plots


Gain @+25°C

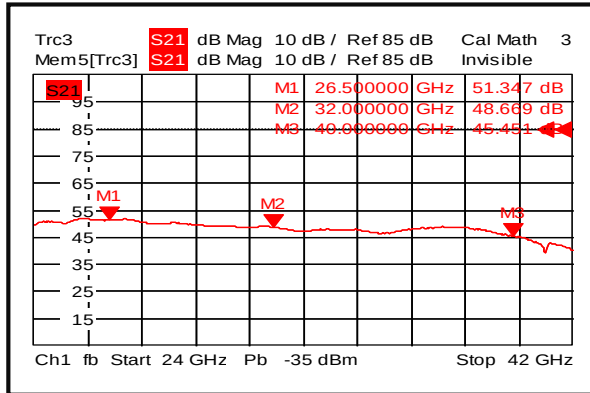


Input VSWR @+25°C

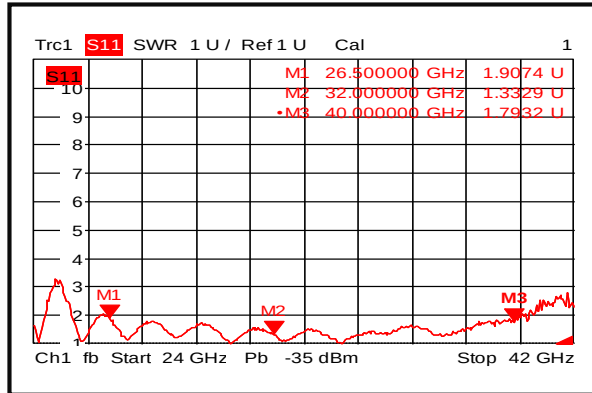


Output VSWR @+25°C

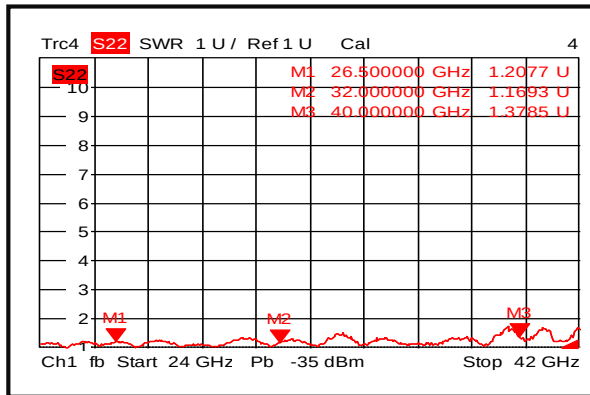


Isolation @+25°C

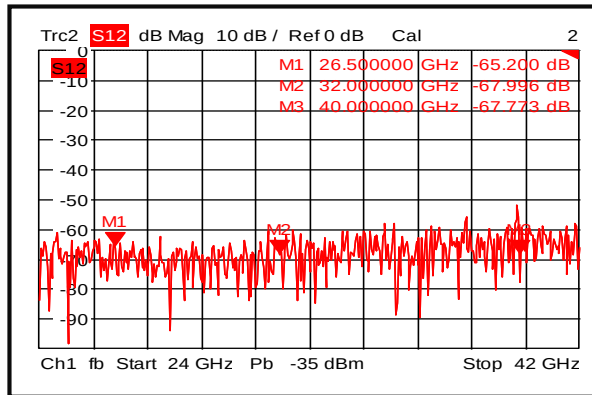

Gain @-45°C

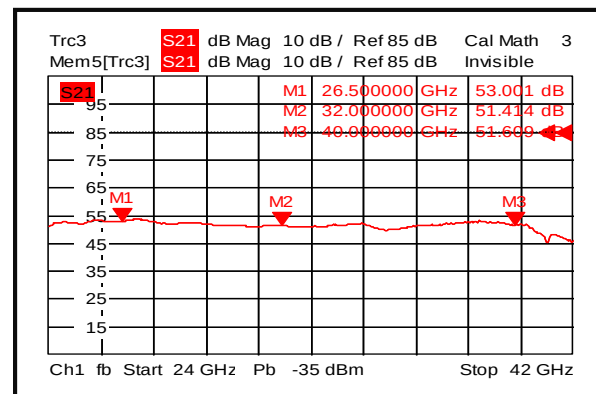


Input VSWR @-45°C

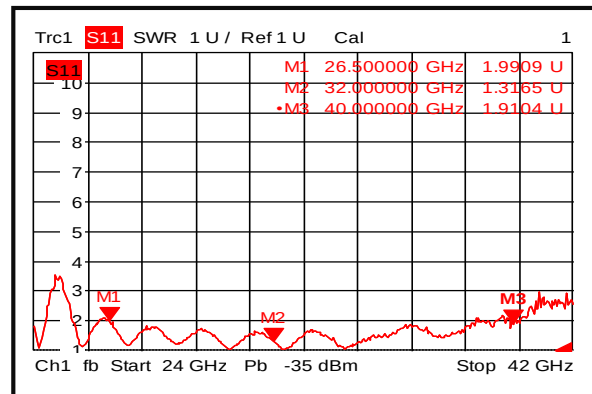





Output VSWR @-45°C

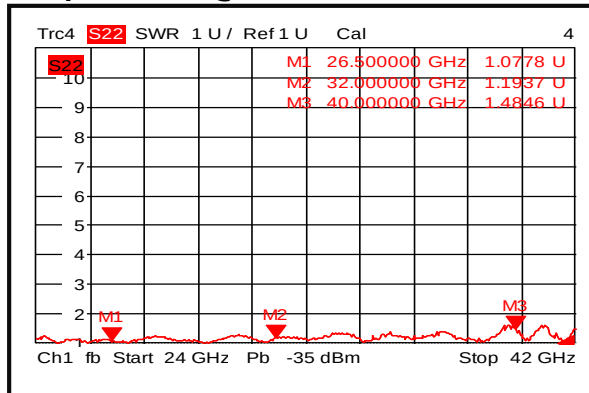


Isolation @-45°C

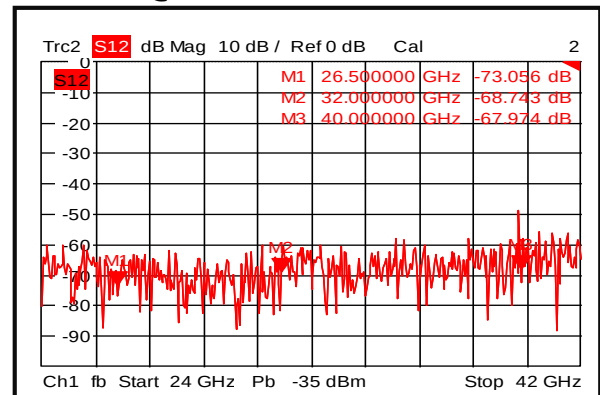


Gain @+85°C

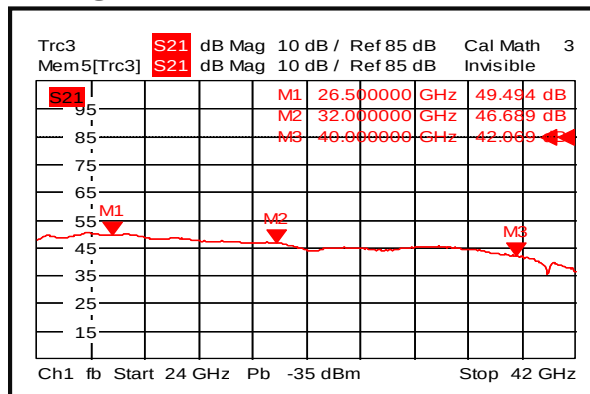


Input VSWR @+85°C

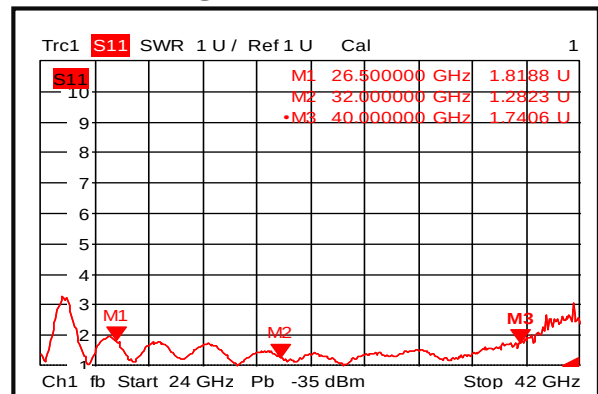

Output VSWR @+85°C

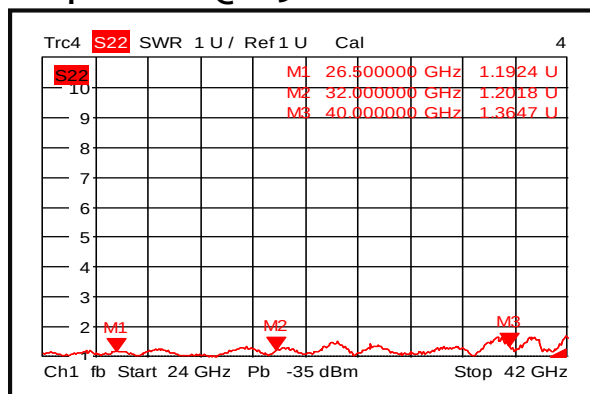


Isolation @+85°C

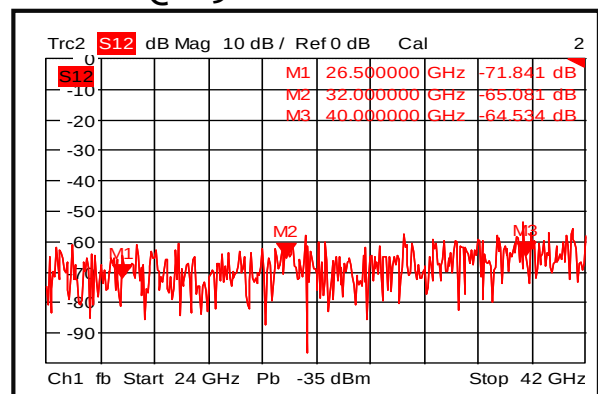





Gain vs. Output Power

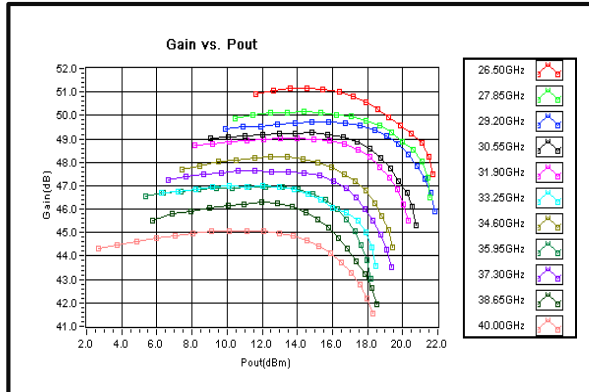


P1dB vs. Frequency

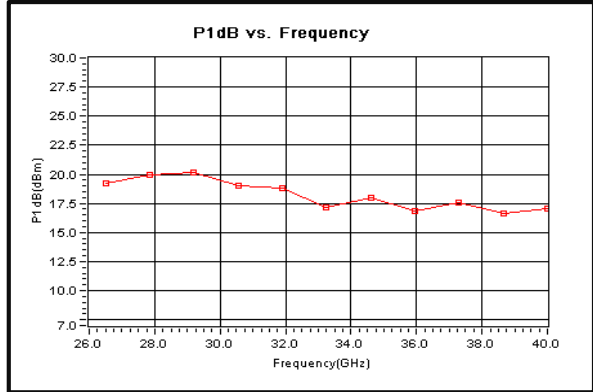


P3dB vs. Frequency

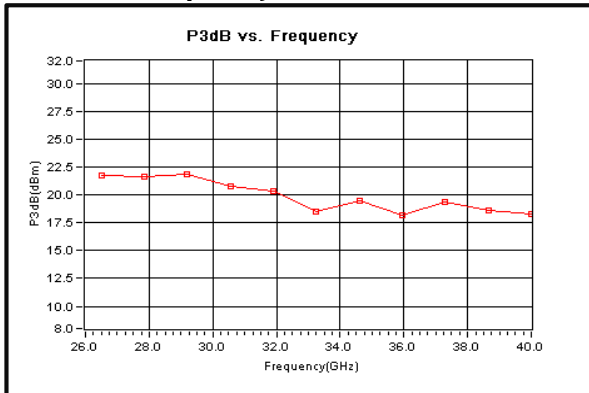


Output Third Order Intercept (IP3)

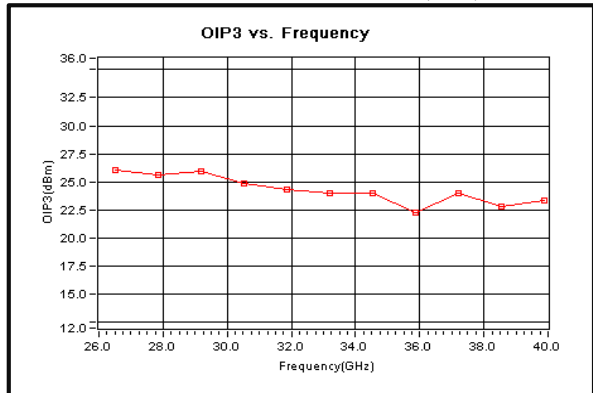

Current

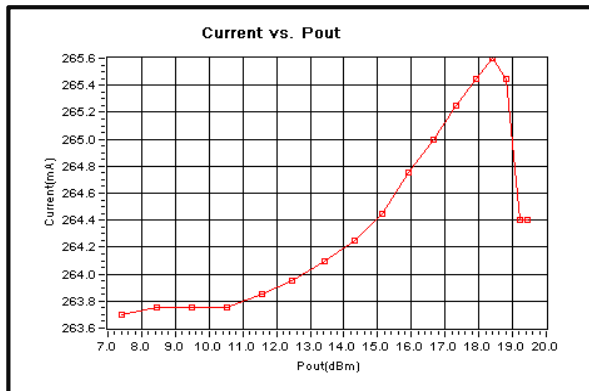


Noise Figure

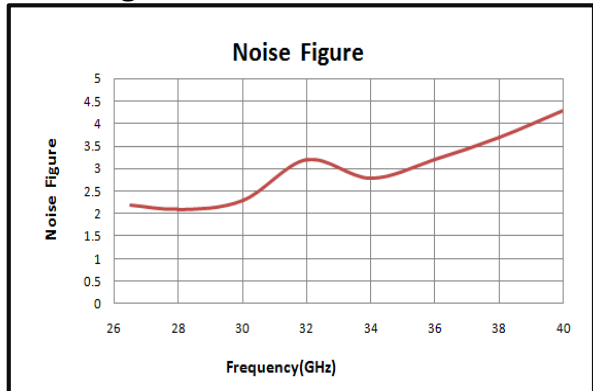




Outline Drawing:

All Dimensions in mm [inches]

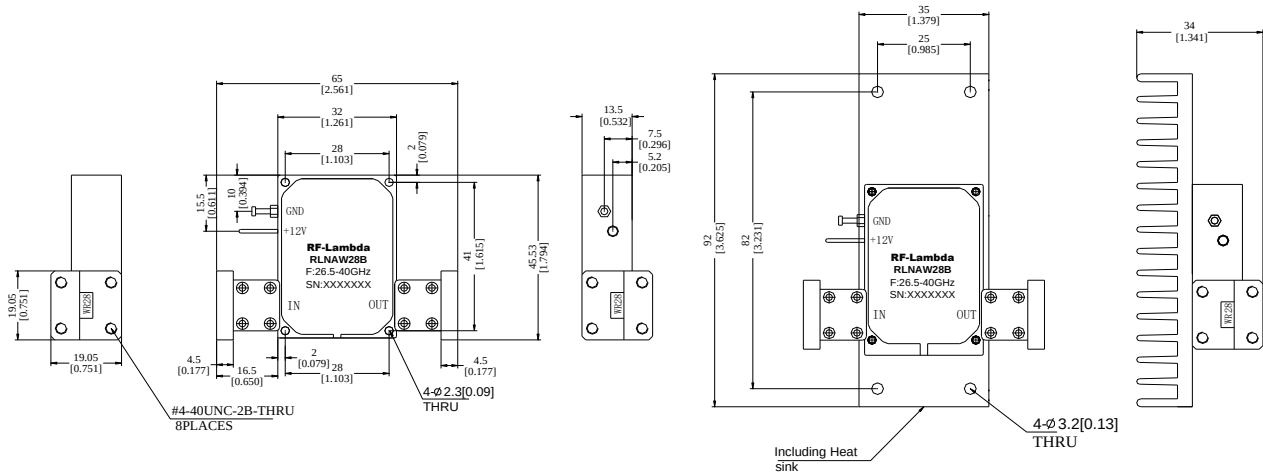

WR28	WG22	R320
UG599/U		
Dimensions	inches	mm
A	0.75	19.05
E	0.265	6.73
F	0.250	6.35
Hole Dia.	0.116	2.98



Heat Sink required during operation (Sold Separately)



Ordering Information

Part No.	ECCN	Description
RLNAW28B	EAR99	26.5-40GHz WR28 Low Noise Amplifier

Important Notice

The information contained herein is believed to be reliable. RF-Lambda makes no warranties regarding the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for any of the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for the use of the information contained herein. The information contained herein is provided "AS IS, WHERE IS" and with all faults, and the entire risk associated with such information is entirely with the user. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders for RF-Lambda products. The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information. RF-Lambda products are not warranted or authorized for use as critical components in medical, life-saving, or life sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.