



RF-LAMBDA

LEADER OF RF BROADBAND SOLUTIONS

RPNA08G11GA

Hermetically Sealed Front End Protected Low Noise Amplifier 8-10GHz

Features

- Gain: 24dB Typical
- Noise Figure: 1.5dB Typical
- P1dB Output Power: +12.5dB min
- Supply Voltage: +15V
- 50 Ohm Matched

Typical Applications

- Wireless Infrastructure
- RF Microwave & VSAT
- Military & Aerospace
- Test Instrument
- Fiber Optics



Electrical Specifications, Vcc = +15V

Parameter		Min.	Typ.	Max.	Units
Frequency Range		8		11	GHz
Gain		23	24	25	dB
Gain Flatness			±0.45		dB
Gain Variation (Relative Average)				±0.55	dB
Gain Variation vs Temperature (-32°C ~ +57°C)				±0.70	dB
Noise Figure			1.5	1.8	dB
Input VSWR			1.5	1.5	: 1
Output VSWR			1.5	1.5	: 1
Output 1dB Compression Point (P1dB)		12.5			dBm
Input Power (dBm)				20	dBm
Saturated Output Power (Psat)			15		dBm
Output Third Order Intercept (IP3)			22		dBm
3rd Order IM Level				-40	dBm
Maximum Linear Signal		-39			dBm
Phase linearity	@ (10 MHz portion)			±0.75	degrees
	@ (150 MHz portion)			±3.45	degrees
Phase stability (Pulse-to-Pulse)				0.02	degrees
Gain stability (Pulse-to-Pulse)				0.035 %	dB
Spurious level				-80	dBc
Supply Current (Vcc=+15V)			180	300	mA
Isolation S12			-55		dB
Weight		/			Ounces
Impedance		50			Ohms
Input / Output Connectors		SMA-Female			
Finish		Gold Plating			
Material		Aluminum			
Package Sealing		Hermetically Sealed (Laser Sealed)			

Hermetically Sealed Front End Protected Low Noise Amplifier 8-11GHz



Absolute Maximum Ratings


Operating Voltage	+15.5V
RF Input Power (CW)	+20dBm
RF Input Peak Power (Pulse Duration up to 100usec, Repetition Rate 200KHz)	+30dBm

Biasing Up Procedure

Step 1	Connect Ground Pin
Step 2	Connect input and output
Step 3	Connect +15V biasing
Power OFF Procedure	
Step 1	Turn off +15V biasing
Step 2	Remove RF connection
Step 3	Remove Ground.

Environmental Specifications

Operational Temperature (°C)	-32 to +57
Storage Temperature (°C)	-46 to +65
Altitude	30,000 ft. (Epoxy Sealed Controlled environment)
	60,000 ft. 1.0psi min (Hermetically Sealed Un-controlled environment) (Optional)
Vibration	25g RMS (15 degrees 2KHz) endurance, 1 hour per axis
Humidity	100% RH at 35c, 95%RH at 40°c
Shock	20G for 11msec half sine wave, 3 axis both directions

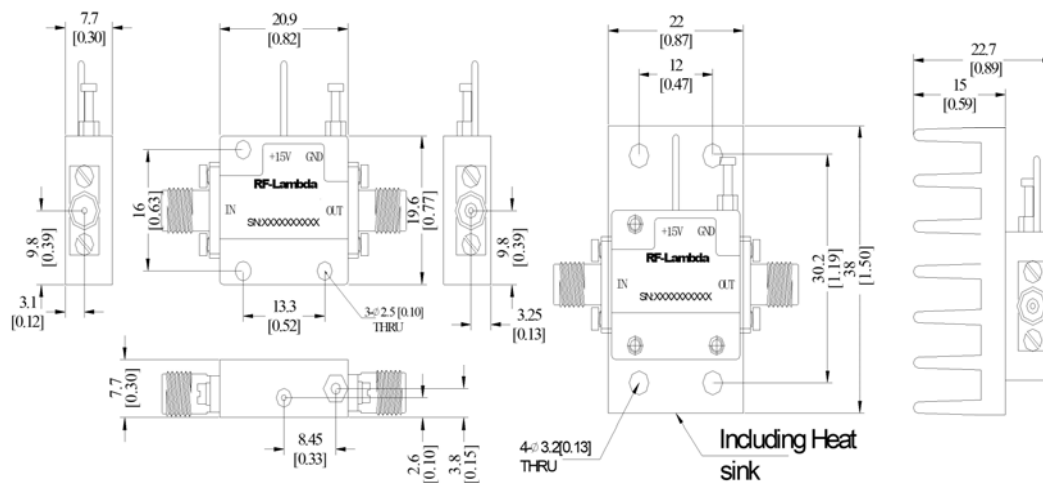

Heat Sink required during operation (Sold Separately)

Part No.	ECCN	Description
RPNA08G11GA	EAR99	Hermetically Sealed Front End Protected Low Noise Amplifier

Important Notice

The information contained herein is believed to be reliable. RF-Lambda makes no warranties regarding the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for any of the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for the use of the information contained herein. The information contained herein is provided "AS IS, WHERE IS" and with all faults, and the entire risk associated with such information is entirely with the user. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders for RF-Lambda products. The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information. RF-Lambda products are not warranted or authorized for use as critical components in medical, life-saving, or life sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.