



RF-LAMBDA

LEADER OF RF BROADBAND SOLUTIONS

RVPT0117MCC

Voltage Control Phase Shifter 130 - 170MHz



Features

- Wide Band Operation 130-170MHz
- 360° Phase Shift
- Low Insertion Loss and Low Phase Error
- Single Control Operation
- Customization available upon request

Typical Applications

- Military and Aerospace
- Test & Measurement
- Research and Development

Electrical Specifications, TA = +25 °C

Description	PN:RVPT0117MCC			
	Voltage Control Phase Shifter			
Parameter	Min	Typ	Max	Units
Frequency Range	130~170			MHz
Phase Range		360		deg
Phase Error		±20		deg
Insertion Loss		2.5	3.5	dB
Insertion Loss Temperature Coefficient		0.01		dB/°C
Input VSWR		1.5	2.0	:1
Output VSWR		1.5	2.0	:1
0.1dB Compression Point (Po.1dB)		30		dBm
Control Voltage	0	10		V
Current Consumption	5			mA
Impedance	50			Ω
Weight	2.12			Ounces
Input / Output Connectors	SMA-Female			
Finish	Nickel Plated			
Material	Aluminum			
Sealing	Hermetically Sealed (Optional)			

Voltage Control Phase Shifter 130 - 170MHz



RF-LAMBDA

LEADER OF RF BROADBAND SOLUTIONS

RVPT0117MCC

Absolute Maximum Ratings

Control Voltage	0~15V
RF Input power	+30dBm

Ordering Information

Part No	ECCN	Description
RVPT0117MCC	EAR99	130-170MHz Voltage Control Phase Shifter

Environmental Specifications and Test Standards

Parameter	Standard	Description
Operational Temperature	MIL-STD-39016	-45°C~+85°C
Storage Temperature		-55°C~+125°C
Thermal Shock		1 Hour@ -45°C → 1 Hour @ +85°C (5 Cycles)
Random Vibration		Acceleration Spectral Density 6 (m/s) Total 92.6 RMS
Electrical & Temperature Burn In		Temperature +85°C for 72 Hours
Shock		1. Weight >20g, 50g half sine wave for 11ms, Speed variation 3.44m/s 2. Weight <=20g, 100g Half sine wave for 6ms, Speed variation 3.75m/s 3. Total 18 times (6 directions, 3 repetitions per direction).
Altitude	MIL-STD-883	Standard: 30,000 Ft (Epoxy Sealed Controlled Environment) Optional: Hermetically Sealed (60,000 ft. 1.0 PSI min)
Hermetically Sealed (Optional)		MIL-STD-883 (For Hermetically Sealed Units)

Voltage Control Phase Shifter 130 - 170MHz




RF-LAMBDA

LEADER OF RF BROADBAND SOLUTIONS


RVPT0117MCC

Typical Performance Plots


Insertion Loss @ +25°C

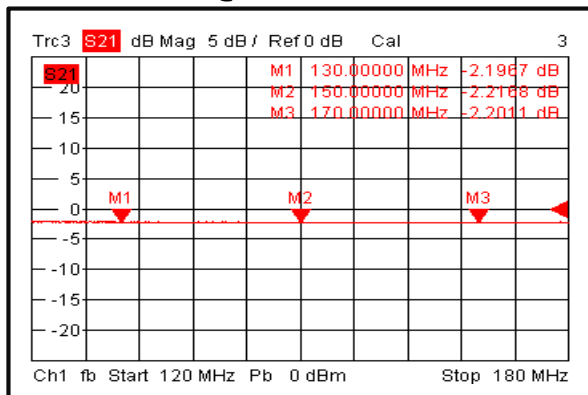


Input VSWR @ +25°C

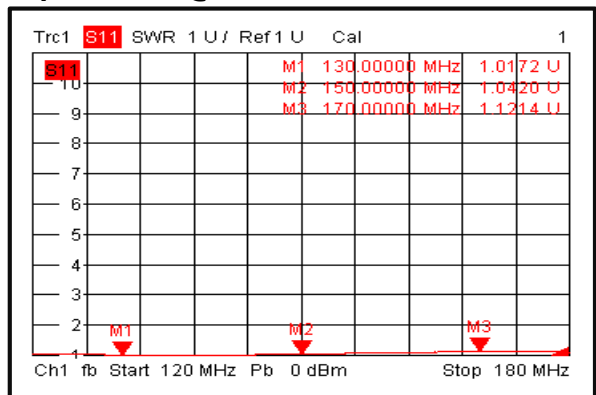


Output VSWR @ +25°C

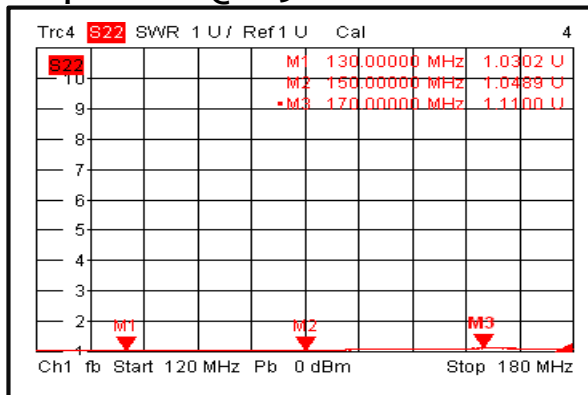


Insertion Loss @ -45°C

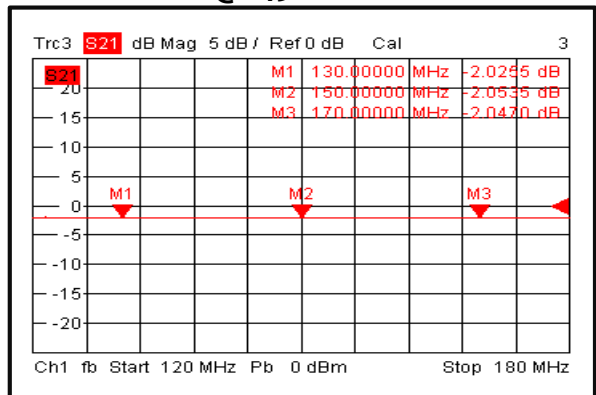


Input VSWR @ -45°C

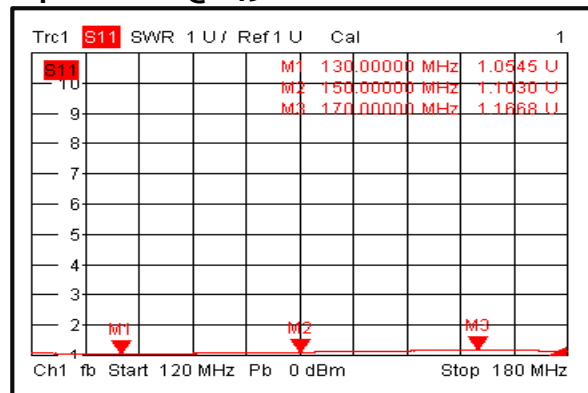


Output VSWR @ -45°C

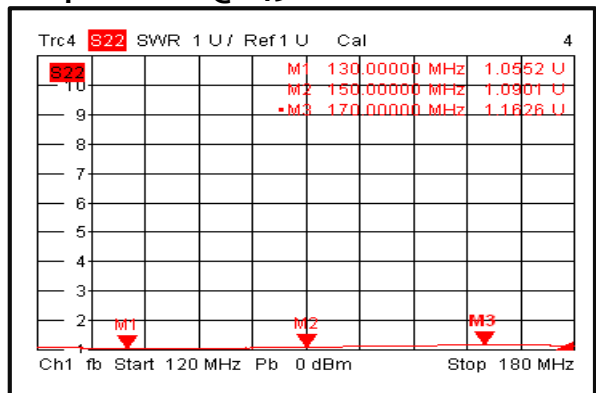

Insertion Loss @ +85°C

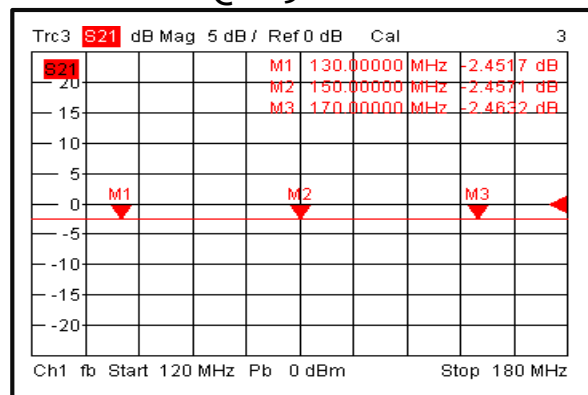

Input VSWR @ +85°C

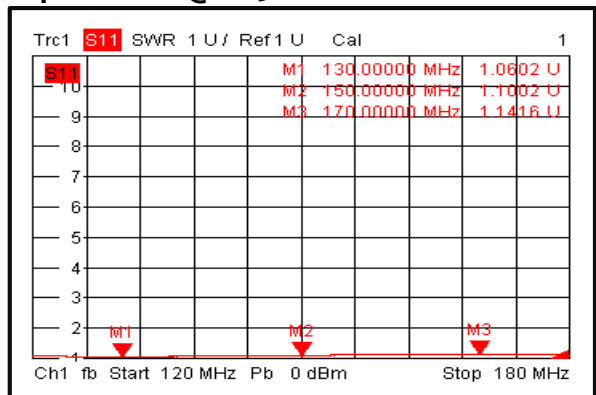

Voltage Control Phase Shifter 130 - 170MHz




RF-LAMBDA


LEADER OF RF BROADBAND SOLUTIONS

RVPT0117MCC


Output VSWR @ +85°C

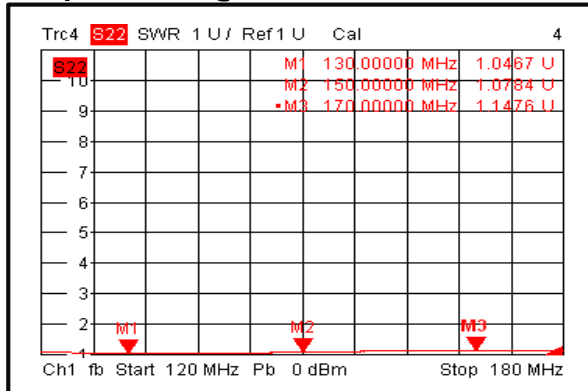


Insertion Loss vs. Frequency

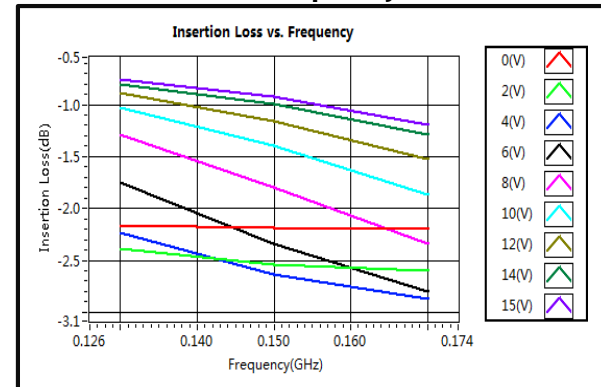


Input VSWR vs. Voltage

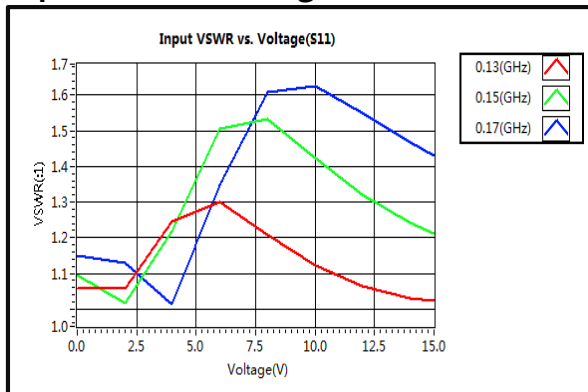


Output VSWR vs. Voltage

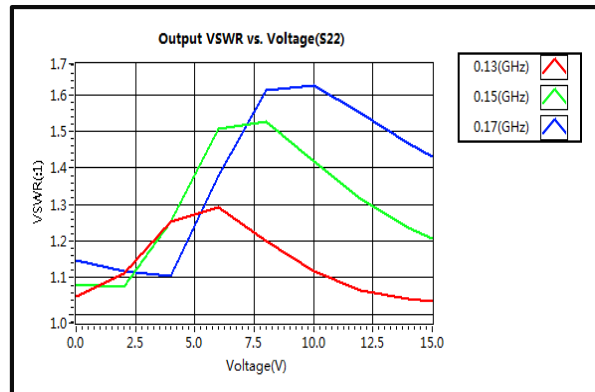


Phase Shift vs. Frequency

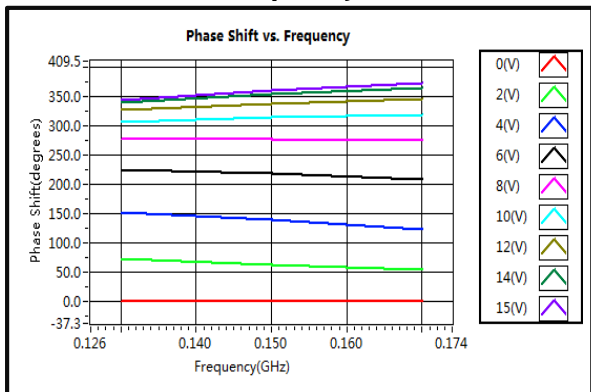

Phase Shift vs. Voltage

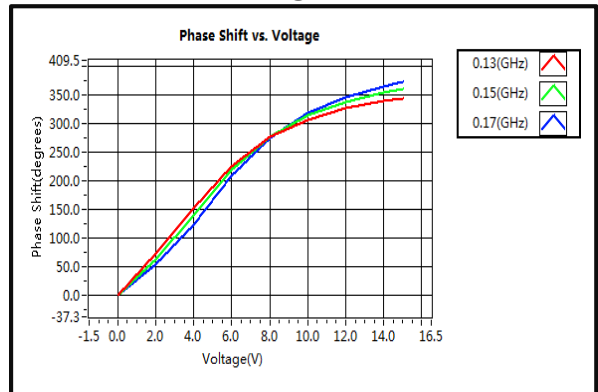

Attenuation vs. Frequency

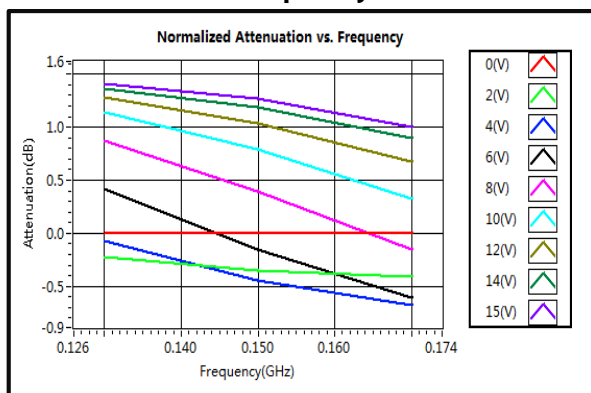

Voltage Control Phase Shifter 130 - 170MHz




RF-LAMBDA

LEADER OF RF BROADBAND SOLUTIONS

RVPT0117MCC

Outline Drawing:

All Dimensions in mm [inches]

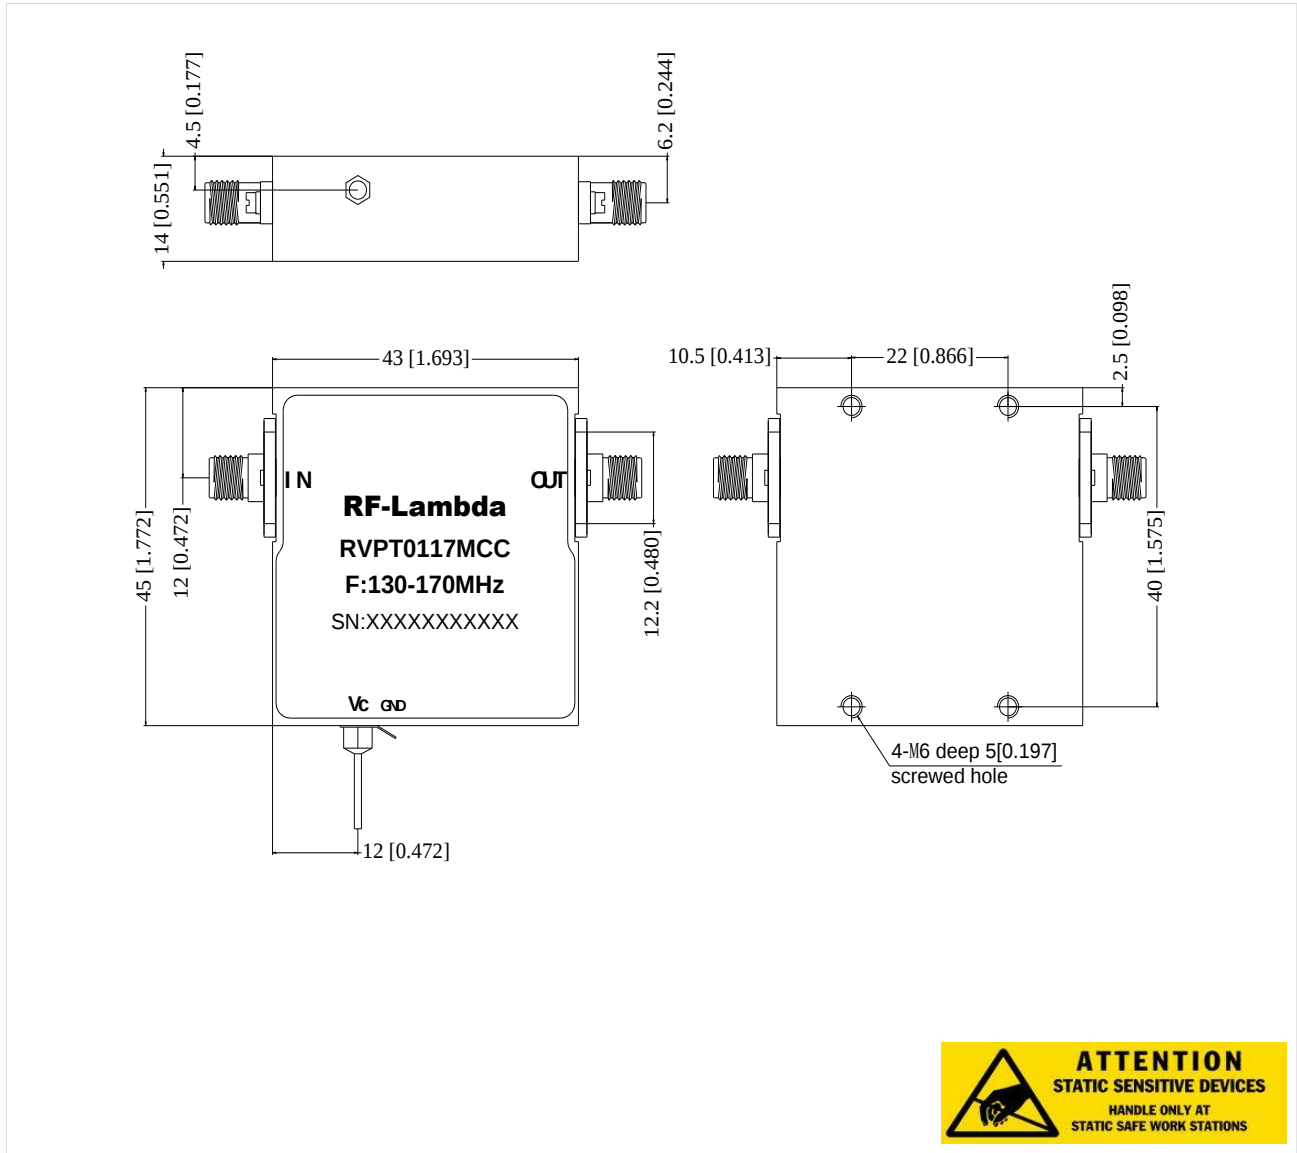

Important Notice

The information contained herein is believed to be reliable. RF-Lambda makes no warranties regarding the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for any of the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for the use of the information contained herein. The information contained herein is provided "AS IS, WHERE IS" and with all faults, and the entire risk associated with such information is entirely with the user. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders for RF-Lambda products. The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information. RF-Lambda products are not warranted or authorized for use as critical components in medical, life-saving, or life sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.

Voltage Control Phase Shifter 130 - 170MHz