


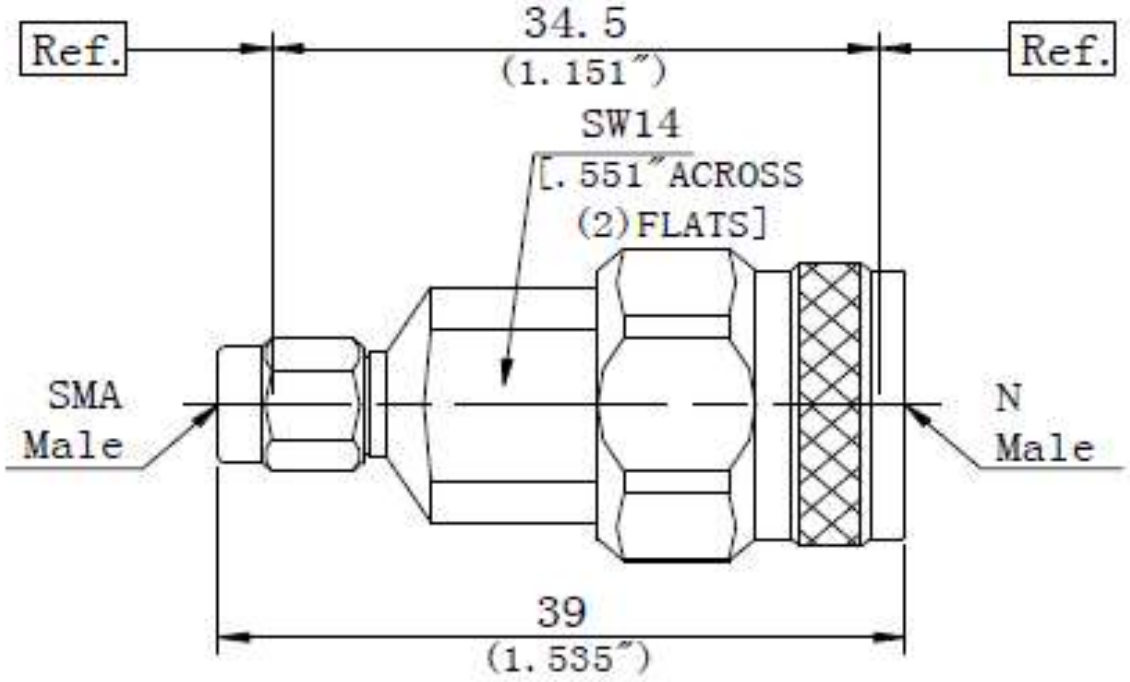

- **Specifications:**
- Impedance= 50 ohms
- Frequency= DC – 18 Ghz
- Durability = 500 cycles
- Temperature Range= -55 C - +165 C
- VSWR 1.15 Max DC-18 Ghz
- **Marerial / Finish**
- Housing: Stainless Steel SU303 Polished / Passivated
- Center Condact: Beryllium Copper Gold plated (MIL-G-45204)
- Insulators: PEI and PTFE
- **N Interfaces PER MIL-STD-348A**
- **SMA Interfaces PER MIL-STD-348A**

SigaTek	423 Black Oak Ridge Rd. Wayne, NJ 07470 Ph: 973-706-8475, Fax: 973-832-435 www.sigatek.com
SA161	Coaxial Adapter 50 ohm N Male-SMA Male
Dimensions are in inches and (mm) Decimal Tolerance: 2 place +- 0.020 3 place +- 0.010	**CAGE CODE : 69UC1**

Notes: All dimensions are typical unless they are specified.
Specifications are subject to change at any time without any notice.
Copy or distribution of this drawing in not allowed without Sigatek's approval.