


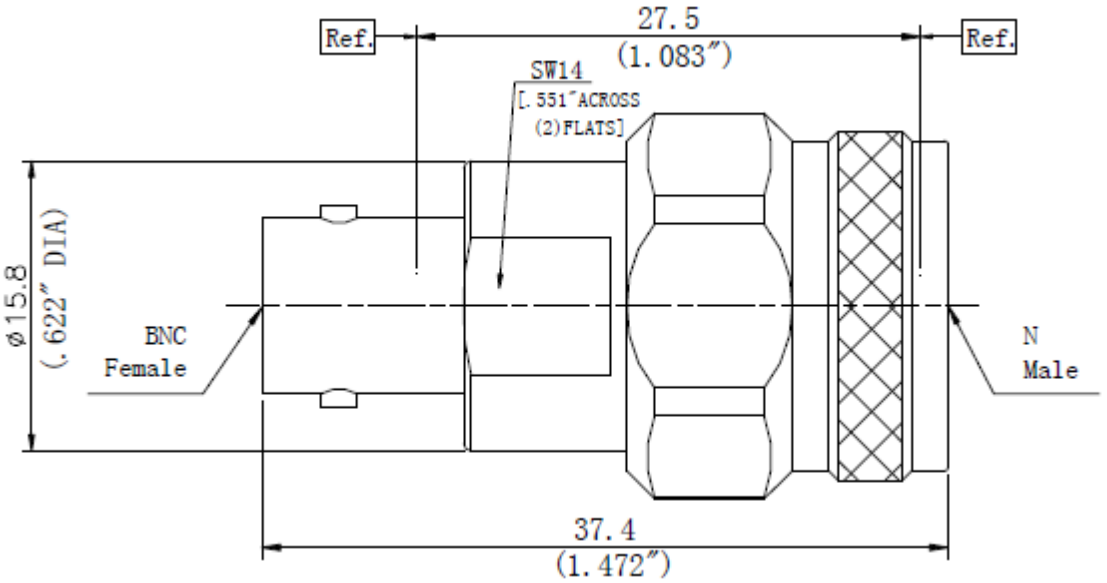

- **Specifications:**
- Impedance= 50 ohms
- Frequency= DC – 8 Ghz
- Durability = 500 cycles
- Temperature Range= -55 C - +165 C
- Interfaces: PER MIL-STD 348A
- VSWR 1.15 Max DC-8 Ghz
- **Marerial / Finish**
- Housing: Stainless Steel SU303 Polished / Passivated
- Center Contact: Beryllium Copper Gold plated (MIL-G-45204)
- Insulators: PTFE & PEI

SigaTek	423 Black Oak Ridge Rd. Wayne, NJ 07470 Ph: 973-706-8475, Fax: 973-832-435 www.sigatek.com
SA305	Coaxial Adapter 50 ohm N Male-BNC Female
Dimensions are in inches and (mm) Decimal Tolerance: 2 place +- 0.020 3 place +- 0.010	**CAGE CODE : 69UC1**

Notes: All dimensions are typical unless they are specified.
Specifications are subject to change at any time without any notice.
Copy or distribution of this drawing in not allowed without Sigatek's approval.