


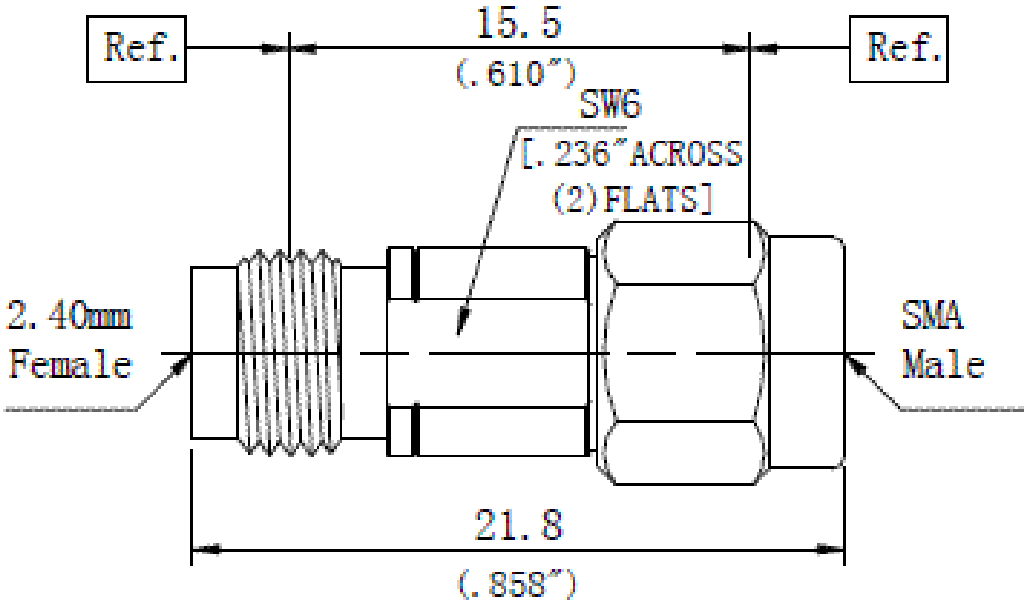

- **Specifications:**
- Impedance= 50 ohms
- Frequency= DC – 27 Ghz
- Durability = 500 cycles
- Temperature Range= -55 C - +165 C
-
- **Marerial / Finish**
- Housing: Stainless Steel SU303 Polished / Passivated
- Center Condact: Beryllium Copper Gold plated (MIL-G- 45204)
- Insulators: PEI
- **2.4mm Interfaces PER IEEE STD 287-2007**
- **SMA Interfaces PER MIL-STD-348A**

SigaTek	423 Black Oak Ridge Rd. Wayne, NJ 07470 Ph: 973-706-8475, Fax: 973-832-435 www.sigatek.com
SA201	Coaxial Adapter 50 ohm 2.4mmFemale-SMAMale
Dimensions are in inches and (mm) Decimal Tolerance: 2 place +- 0.020 3 place +- 0.010	**CAGE CODE : 69UC1**

Notes: All dimensions are typical unless they are specified.
Specifications are subject to change at any time without any notice.
Copy or distribution of this drawing in not allowed without Sigatek's approval.