



WRD350 Waveguide Isolator 4 - 9GHz 10KW

Features

- High power handling capability up to 10KW
- Wide band operation
- High isolation within operational band
- Low Insertion loss
- Stable performance over temperature
- High peak to average handling capability
- All specifications can be modified upon request



Typical Applications

- Aerospace and military applications
- LMDS multi-carrier operation

Electrical Specifications, $T_A=25^\circ\text{C}$

Parameter	Min	Typ	Max	Units
Frequency Range	4 - 9			GHz
Insertion Loss			0.50	dB
Isolation (Note 1)	17			dB
VSWR			1.30	: 1
Forward Pulse Power	10kW, 10% Duty Cycle, 100us Pulse Width			
Reverse Power	2kW, 10%, 100us (10k must be less 5 seconds before shut down)			
Air Cooling	Temperature delta must be < 10C AC Axial Cooling Fan (Type AC 8300 H)			
Rotation	Clockwise (Standard) Counter Clockwise (upon request)			
Finishing	Conductive Oxide (not painted)			
Flange Type	wrd350-C2			
Case Material	Aluminum Alloy			
Weight				ounces
Impedance	50			Ω
Note 1: Units which have a narrower frequency bandwidth can achieve higher isolation & lower insertion loss Bandwidth (5 ~10) % x Center Frequency (Isolation >23dB) Bandwidth (20~30) % x Center Frequency (Isolation >21dB) Bandwidth (40~60) % x Center Frequency (Isolation >20dB) Ask manufacturer for detail				



RF-LAMBDA

LEADER OF RF BROADBAND SOLUTIONS

RFWI350K10GD

Environmental Specifications

Operational Temperature (°C)	-20 ~ +50
Storage Temperature (°C)	-45 ~ +85
Altitude	30,000 ft. (Epoxy Sealed Controlled environment)
	60,000 ft. 1.0psi min (Hermetically Sealed Un-controlled environment) (Optional)
Vibration	25g RMS (15 degrees 2KHz) endurance, 1 hour per axis
Humidity	100% RH at 35c, 95%RH at 40 deg c
Shock	20G for 11msec half sine wave, 3 axis both directions

ACmaxx axial fans

Nominal data (Type AC 8300H)

Parameter	Min	Typ	Max	Units
Frequency		50/60		Hz
Air flow		80		m³/h
		47		cfm
Nominal voltage		115/230		VAC
Voltage range	85		265	VAC
Sound pressure level		48		dB (A)
Sound power level		6.2		Bel (A)
Bearing		Ball bearings		
Power consumption		8.3		Watts
Nominal speed		5000		rpm ⁻¹
Service life L ₁₀ (40°C)		55000		Hours
Service life L ₁₀ (T _{max})		20000		Hours
Life expectancy L _{10IPC} (40°C)		92500		Hours
Direction of air flow		Exhaust over struts		
Direction of rotation		Clockwise, looking towards rotor		
Material		Housing: GRP ⁽¹⁾ (PBTP) Impeller: GRP ⁽¹⁾ (PA)		
Connection line		Via single wires AWG 22,TR 64		
Weight		11.46		ounces
Dimensions		80x80x32		mm
Operational Temp.	-20		+75	°C
Option	Open loop speed control, speed and alarm signal; improved moisture protection or protection class IP 54			

WRD350 Waveguide Isolator 4-9GHz



RF-LAMBDA

LEADER OF RF BROADBAND SOLUTIONS


RFWI350K10GD

Notes:

Air performance measured according to: ISO 5801.
Installation category A, without contact protection. Noise:
Total sound power level LWA ISO 103002 measured on a hemisphere with a radius of 2 m. Sound pressure level LpA measured at 1 m distance from fan axis.


The values given are applicable only under the specified measuring conditions and may differ depending on the installation conditions.

In the event of deviation from the standard configuration, the parameters must be checked after installation!
For detailed information see

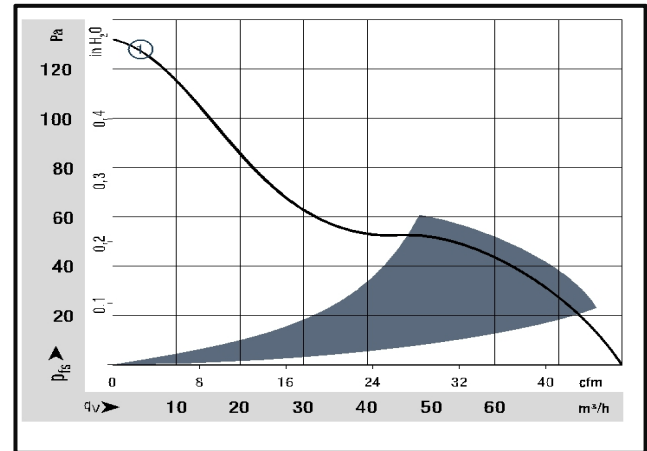

Outline Drawing:

All Dimensions in mm

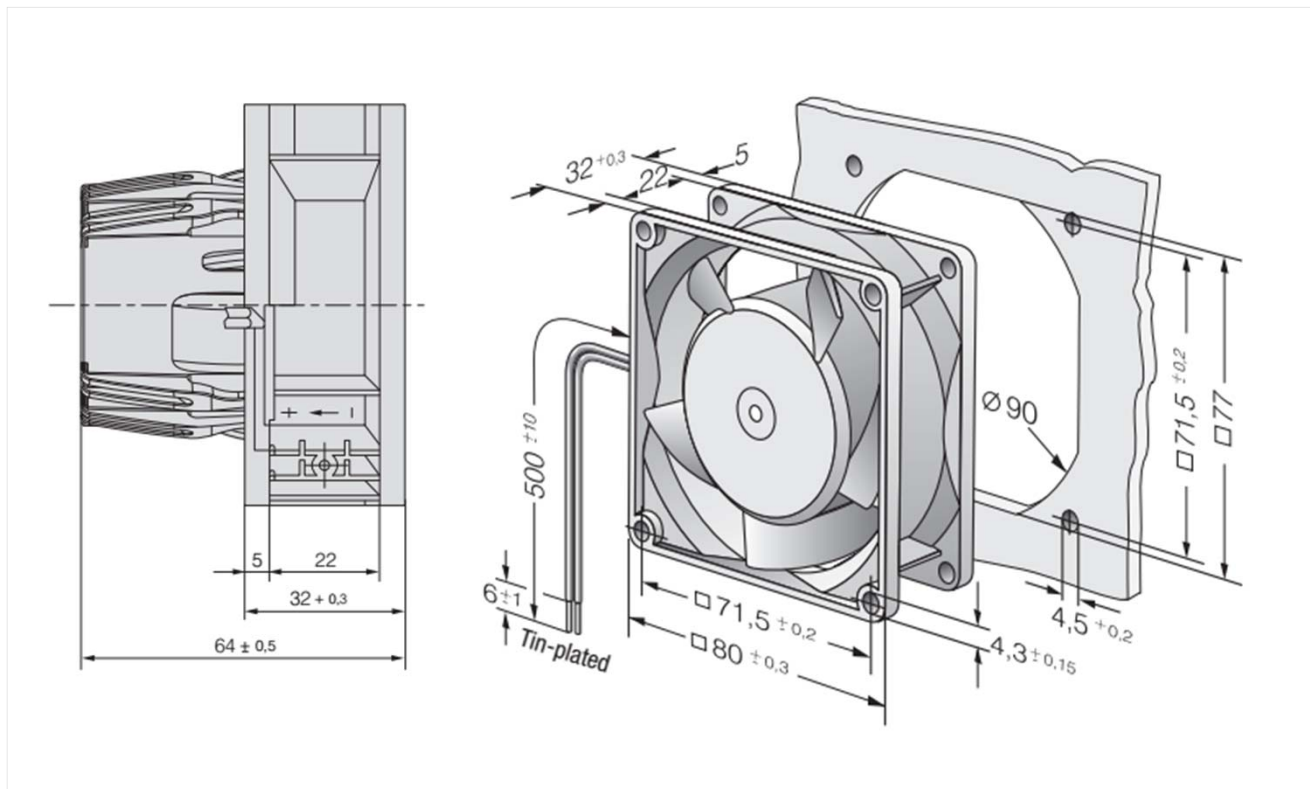


WRD350 Waveguide Isolator 4-9GHz



Outline Drawing:

All Dimensions in mm [inches]

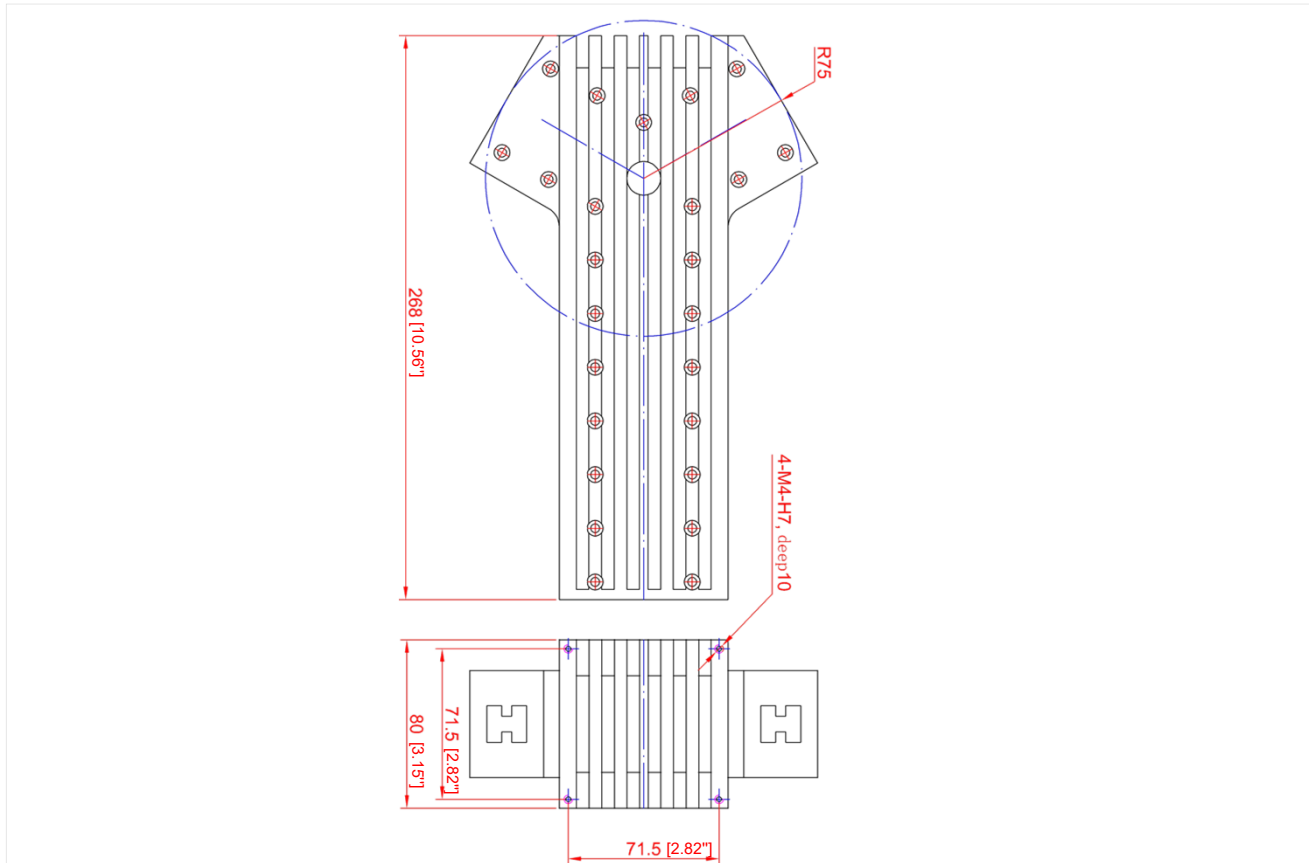

Important Notice

The information contained herein is believed to be reliable. RF-Lambda makes no warranties regarding the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for any of the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for the use of the information contained herein. The information contained herein is provided "AS IS, WHERE IS" and with all faults, and the entire risk associated with such information is entirely with the user. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders for RF-Lambda products. The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information. RF-Lambda products are not warranted or authorized for use as critical components in medical, life-saving, or life sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.