



RF-LAMBDA

The power beyond expectations

RKT2G2A71

ROTARY KNOB MANUAL CONTROL STEP ATTENUATOR (DC-2GHZ 71DB RANGE)

Product description

- Very small package and broadband performance
- Continuous variable attenuation during operation
- Excellent Repeatability and Long Life Switch
- Low Deviation from Nominal Value
- 50Ω impedance standard upon request
- 2W CW average power 2W CW upon request
- Custom Configurations Available Upon Request.




Applications:

Include Communication, 3G, Digital Transmission, Radar, Military, Broadcast & Television, science & Research department etc.

Part Number	Frequency	Power (Watts)	Attenuation Range (dB)	Attenuation Step (dB)	VSWR max.	Insertion Loss (dB)	Accuracy (dB)
RKT2G2A71	DC-2GHz	2	71	0.1	1.50	≤ 1.5	± 0.2(0.1~1dB) ± 0.4(1~10dB) ± 0.6(10~60dB) ± 5%(≥60dB)

Connector: N type, weight: 1250g

Temperature (Operational): -10° C~+50° C (Storage) -40° C~+70° C

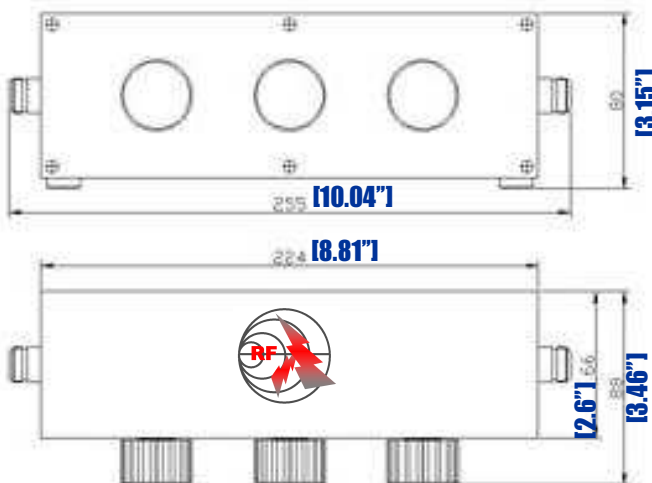

19" X 2U RACK MOUNTING PACKAGE AVAILABLE

PN: **RKT 2 G X A 71**

Manual Control Attenuator Power Handle In Watt Freq Unit GHz Freq Number Product Type Attenuation Range

MANUAL CONTROL STEP ATTENUATOR

(DC-2GHZ 71DB RANGE)





RF-LAMBDA

The power beyond expectations

RKT2G2A71

MANUAL CONTROL STEP ATTENUATOR
(DC-2GHz 71DB RANGE)

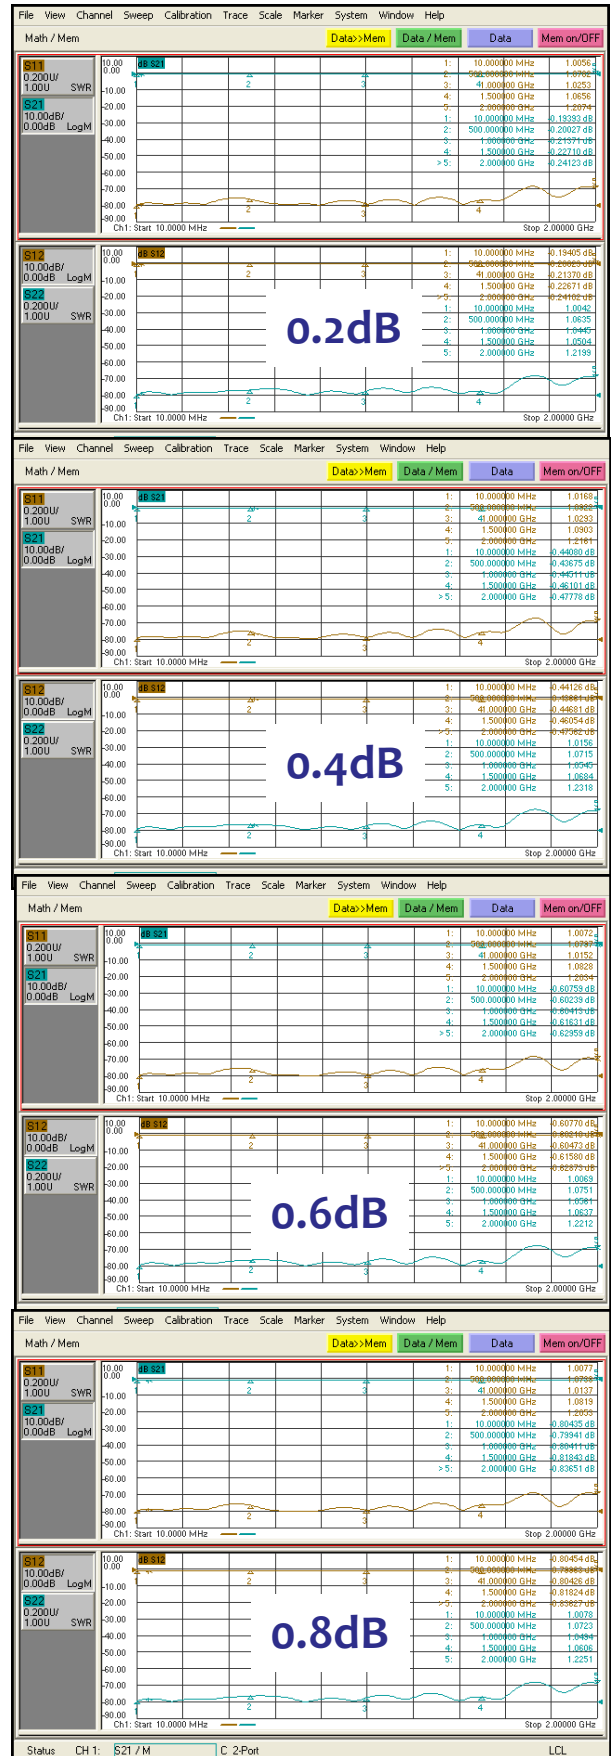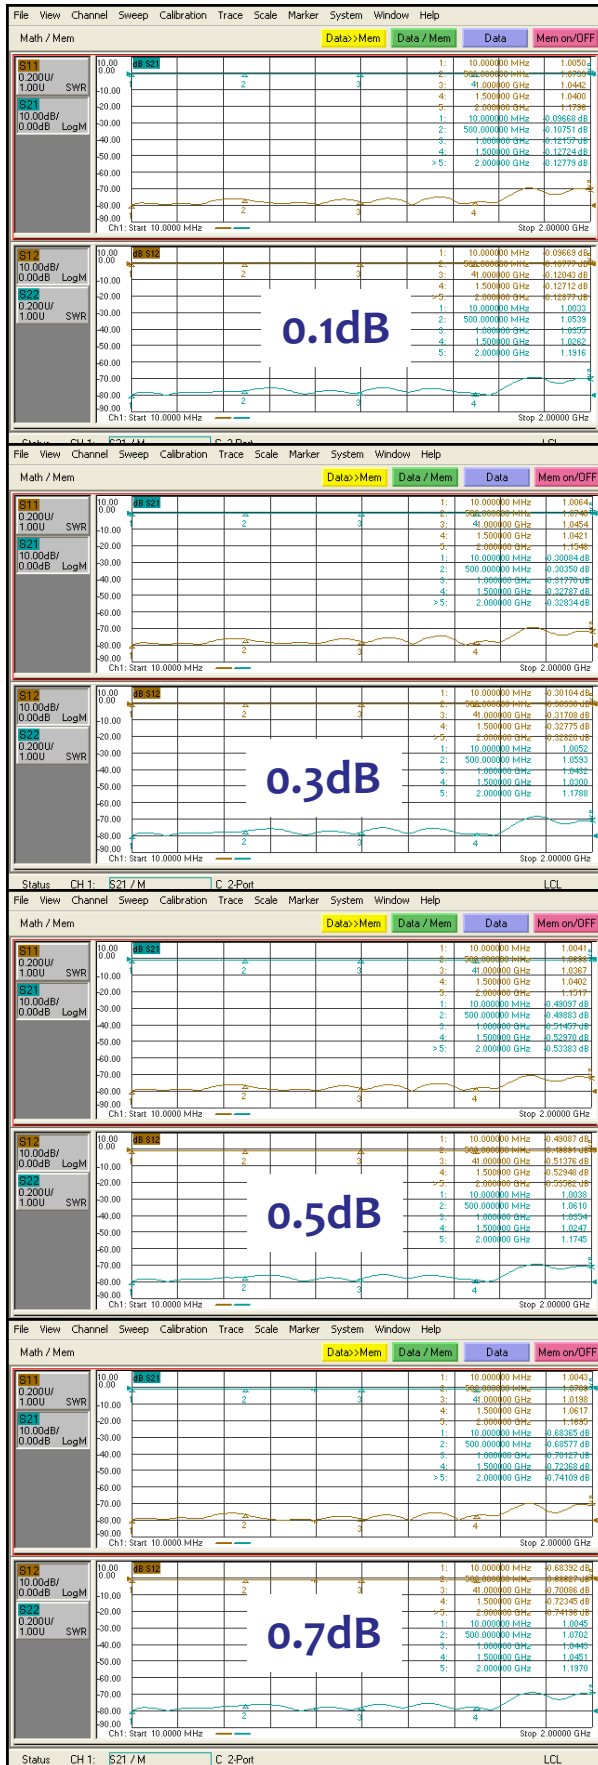

RF-LAMBDA INC. www.rflambda.com

Sales: sales@rflambda.com Technical: support@rflambda.com









RF-LAMBDA

The power beyond expectations

RKT2G2A71

MANUAL CONTROL STEP ATTENUATOR

(DC-2GHz 710dB RANGE)

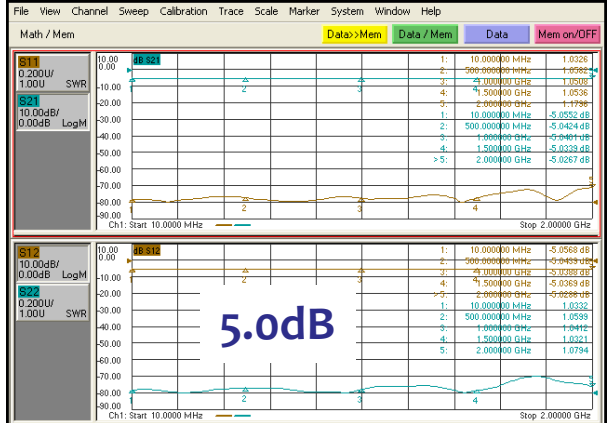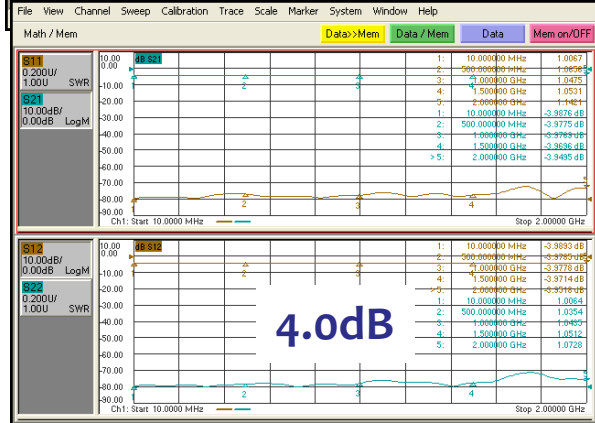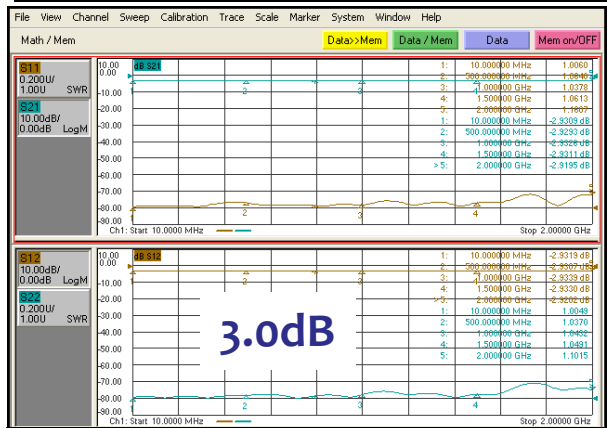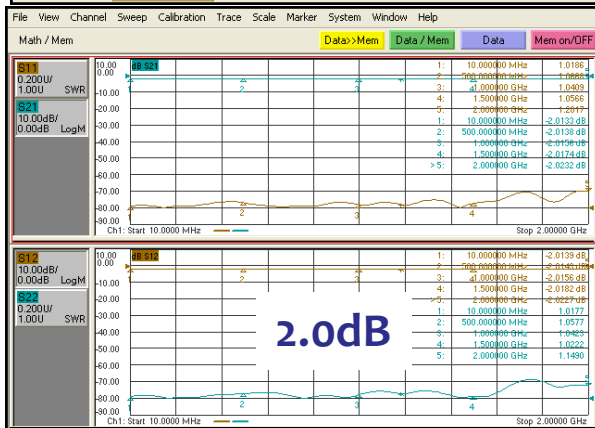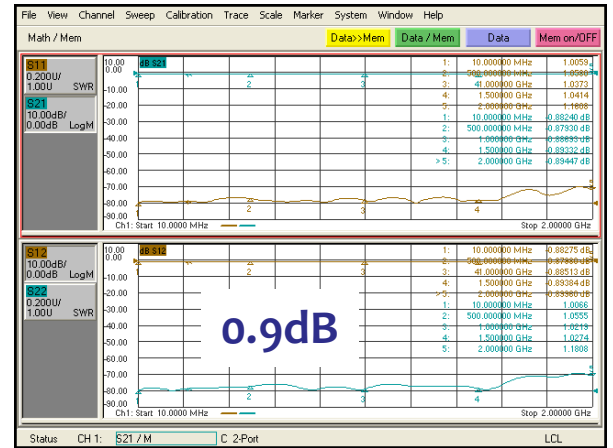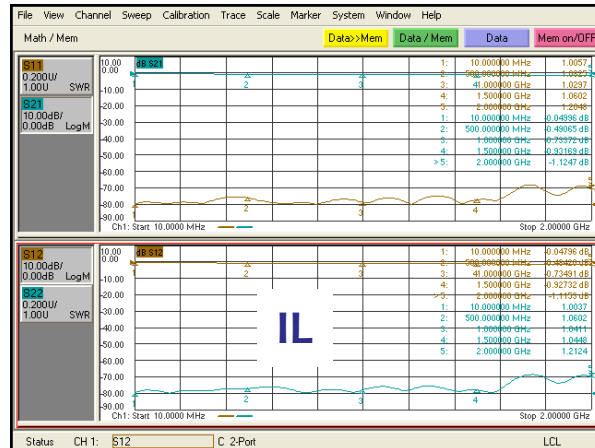

RF-LAMBDA INC. www.rflambda.com

Sales: sales@rflambda.com Technical: support@rflambda.com





RF-LAMBDA

The power beyond expectations

RKT2G2A71

MANUAL CONTROL STEP ATTENUATOR (DC-2GHz 71dB RANGE)

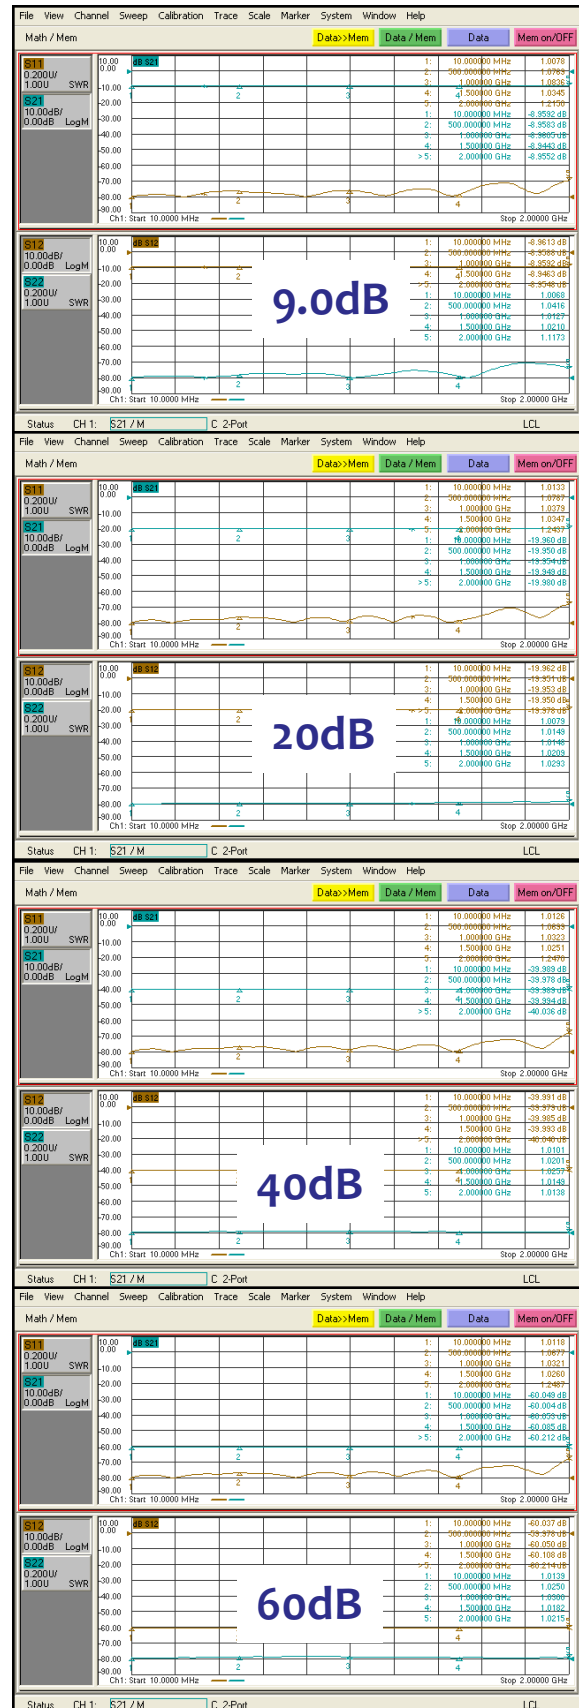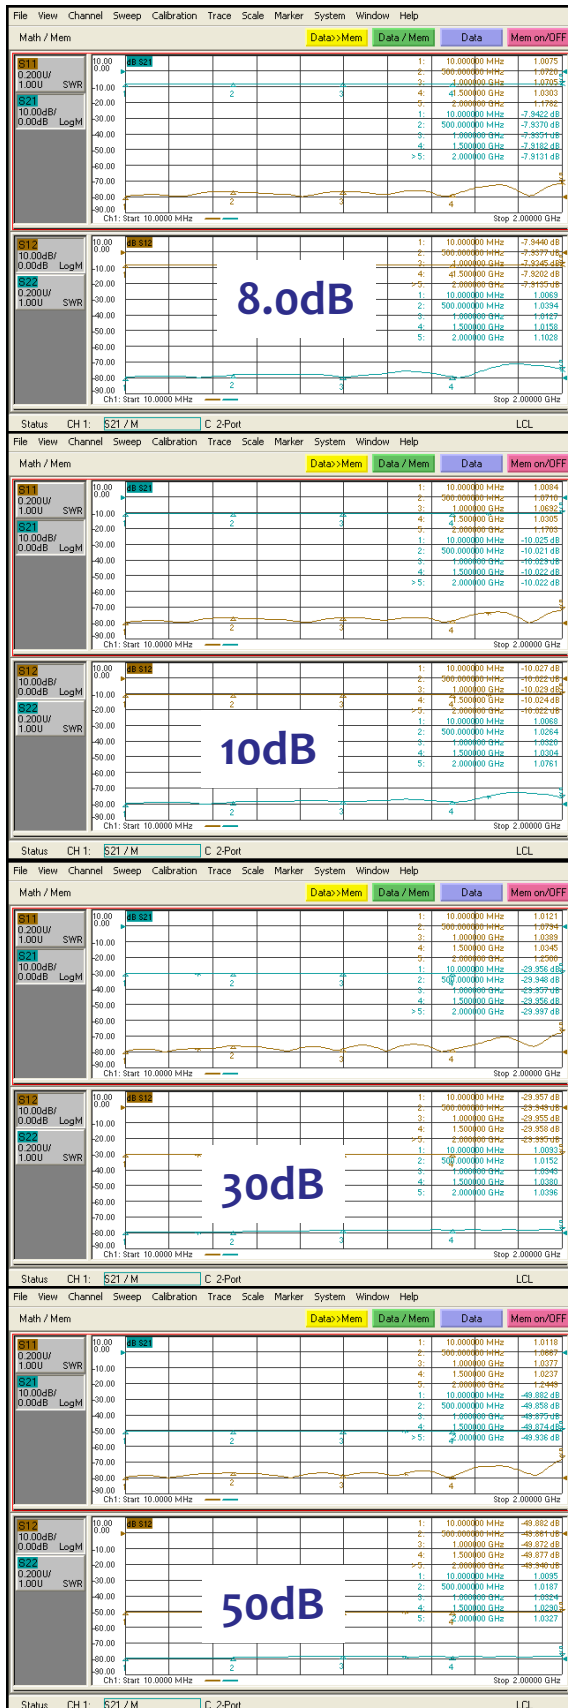

RF-LAMBDA INC. www.rflambda.com


Sales: sales@rflambda.com Technical: support@rflambda.com




RF-LAMBDA

The power beyond expectations

RKT2G2A71

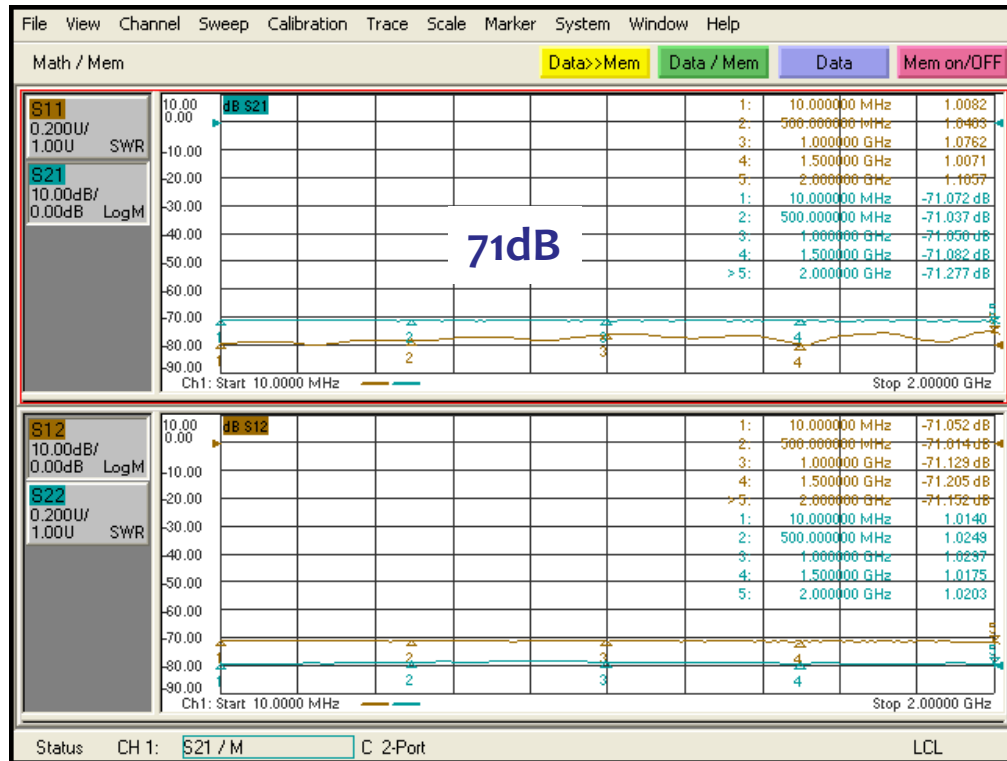

19" X 2U RACK MOUNTING PACKAGE AVAILABLE

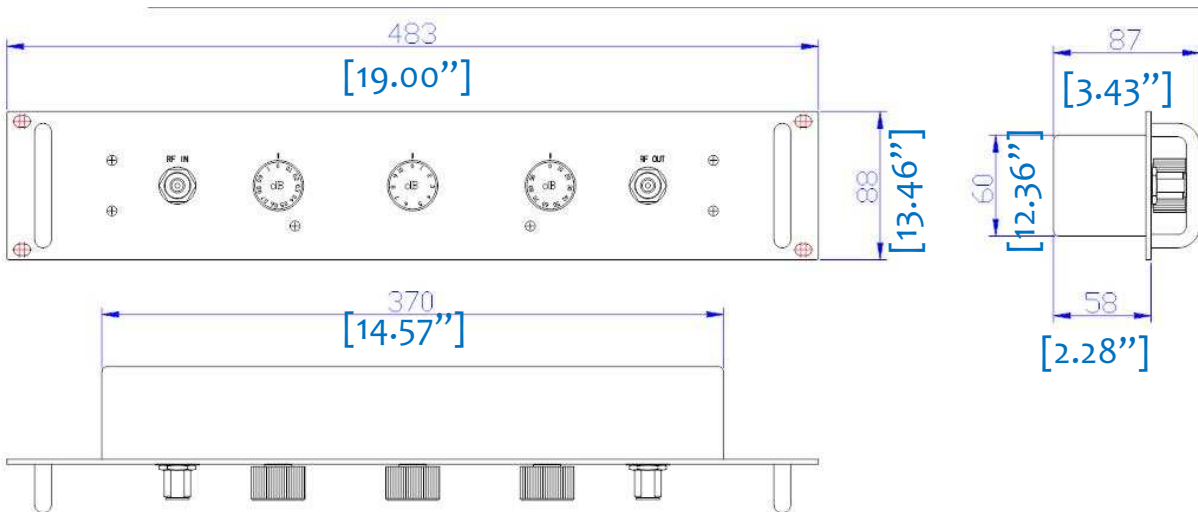

MANUAL CONTROL STEP ATTENUATOR

(DC-26GHZ 71DB RANGE)