



RF-LAMBDA

The power beyond expectations

RKT2G3K30

MANUAL CONTROL STEP ATTENUATOR (DC-3GHz 30DB RANGE)

Product description

- Very small package and broadband performance
- Continuous variable attenuation during operation
- Excellent Repeatability and Long Life Switch
- Low Deviation from Nominal Value
- 50Ω impedance standard upon request
- High power handle up to 10W CW upon request
- Custom Configurations Available Upon Request.




Applications:

Include Communication, 3G, Digital Transmission, Radar, Military, Broadcast & Television, science & Research department etc.

Part Number	Frequency	Power (Watts)	Attenuation Range (dB)	Attenuation Step (dB)	VSWR max.	Insertion Loss (dB)	Accuracy (dB)
RKT2G3K30	DC-2.5GHz	2	30	1	1.40	≤2.0	± 0.4 (single) ± 0.75 (16dB)

Connector: SMA / N type is available, weight: 185g

Temperature (Operational): -10° C~+50° C (Storage) -40° C~+70° C

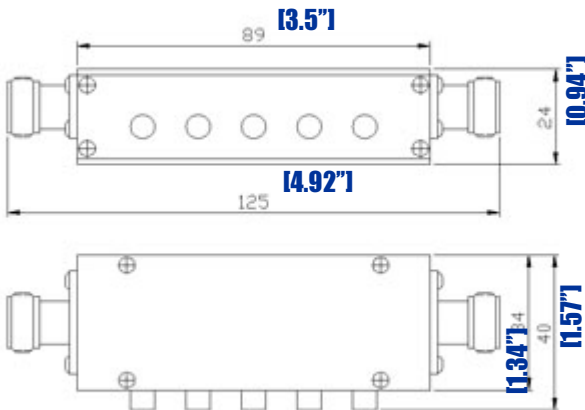

PN: **RKT X G 3 X XX**

Manual Control Attenuator Power Handle In Watt Freq Unit GHz Freq Number Product Type Attenuation Range



MANUAL CONTROL STEP ATTENUATOR

(DC-3GHz 30DB RANGE)



RF-LAMBDA

The power beyond expectations

RKT2G3K30



MANUAL CONTROL STEP ATTENUATOR (DC-36GHz 30DB RANGE)