
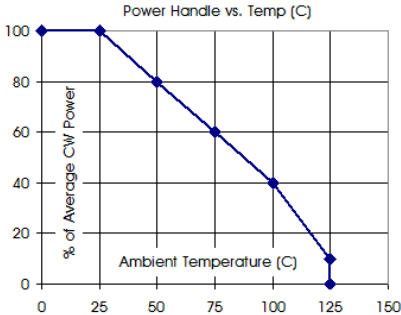


25W COAXIAL FIXED ATTENUATOR DC-26.5GHz. --- RFS25G26B

1.0	Mechanical Specifications	
1.1	Coaxial Connector	SMA(M,F)
1.2	Size	$\Phi 63 \times 28.6\text{mm}$ $\Phi 2.48" \times 1.13"$
1.3	Weight	115g
1.4	External Body Finish	Body painted with gray/black epoxy enamel

2.0	Environment specifications	
2.1	Operation Temp.	-40°C~+85°C
2.2	Storage Temp.	-55°C~+125°C
2.3	Altitude	42000 ft
2.4	Vibration	10g rms (15 degree 2KHz)
2.5	Humidity	100% RH at 35c, 95%RH at 40 deg c
2.6	Shock	20G for 11msc
2.7	Cooling	FAN required for long time operation

3.0		Electrical Specifications							
PN	Frequency (GHz)	Attenuation Accuracy (dB)			VSWR (max.)	IM3	Average Power (W)	Peak Power (KW)	
		10	20	30					
RFS25G26B	DC-26.5	± 1.2	± 1.2	± 1.2	1.30	-100dBc 3dB back off 1MHz step	25W	1.0KW 5us 0.5%	

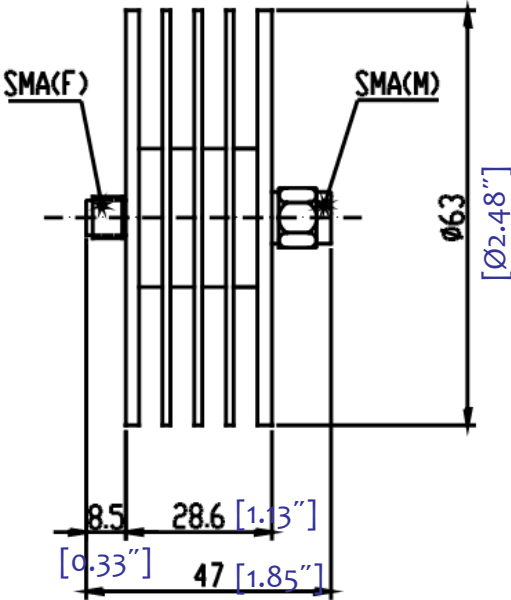

PAGE 1 OF 1	DATE JUN 12 th 2009
PROPRIETARY INFORMATION THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF RF-LAMBDA EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY RF-LAMBDA. THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN THE WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION OF ALL THIRD PARTIES AND SHALL USE SAME FOR OPERATING AND MAINTENANCE PURPOSES ONLY.	DESIGN
	RFPC
	RF-LAMBDA
	RFPC
 RFS25G26B ATTENUATOR	CAD MODEL REVISION
	10
	ASSEMBLY REVISION
	VSS2
www.rflambda.com	ASSEMBLY NAME
	RFLVR07
RF-LAMBDA	DRAWING NUMBER
	D05-A
SIZE LT	SHEETS 1 OF 1