
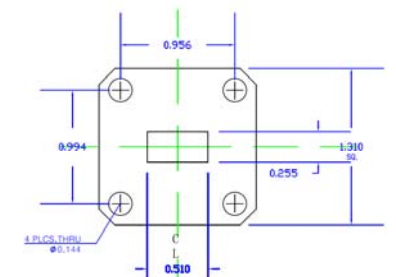


WAVEGUIDE WR51 50W ATTENUATOR - RFWAT51W050

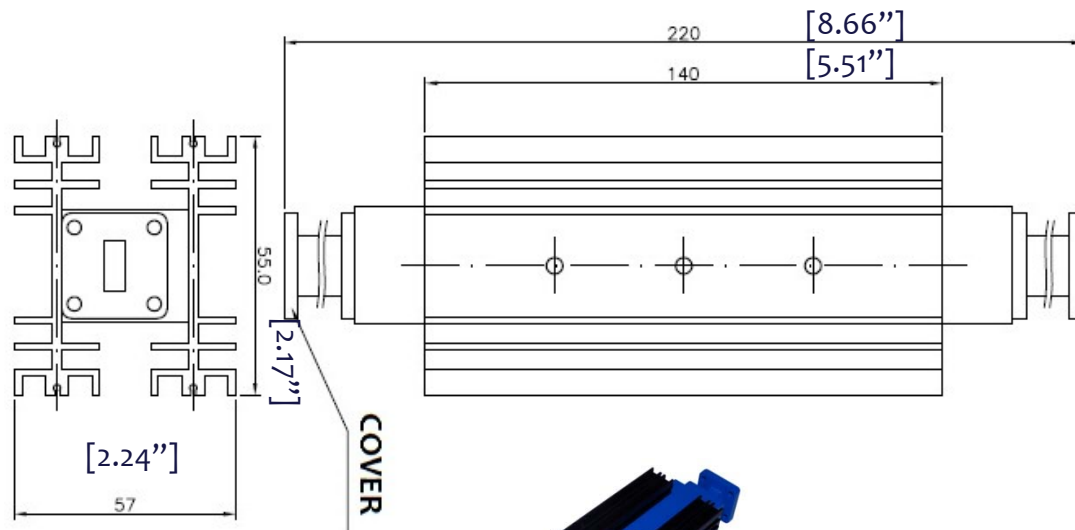

1.0	Mechanical Specifications	
1.1	Waveguide type	Rectangular Waveguide WR51
1.2	Flange type	COM'L COVER (US)
1.3	Flange Holes	Through
1.4	Basis-material	Alloyed Cuprum 0.1kg
1.5	Internal Body Finish	Silver Plated chromate or conversion
1.6	External Body Finish	Body painted with gray/black epoxy enamel

2.0	Environment specifications	
2.1	Operation Temp.	-40°C--+85°C
2.2	Storage Temp.	-60°C--+125°C
2.3	Altitude	45000 ft
2.4	Vibration	10g rms (15 degree 2KHz)
2.5	Humidity	100% RH at 35c, 95%RH at 40 deg c
2.6	Shock	20G for 11msc

3.0	Electrical Specifications	
3.1	Frequency Range	15-22GHz
3.2	Forward Power	50W (CW)
3.3	Peak Power	1KW (8us pulse)
3.4	Attenuation	3dB-50dB
3.5	VSWR	1.20:1 (type.)

PAGE 1 OF 1		DATE	Sep 20 th 2005
PROPRIETARY INFORMATION THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF RFLAMBDA EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY RFLAMBDA. THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN THE WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION OF ALL THIRD PARTIES AND SHALL USE SAME FOR OPERATING AND MAINTENANCE PURPOSES ONLY.		DESIGN	RFPC
		RF-LAMBDA	RFPC
		CAD MODEL REVISION	11
		ASSEMBLY REVISION	V55D5
 RFWAT51W050W AVEGUIDE ATTENUATOR		ASSEMBLY NAME	RFLVR05
		DRAWING NUMBER	D05-1
www.rflambda.com		SIZE	LT
RFLAMBDA		SHEETS	1 OF 1